

MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963 A

1986 ANNUAL TROPICAL CYCLONE REPORT FILE COPY





JOINT TYPHOON WARNING CENTER GUAM, MARIANA ISLANDS

This document has been approved for public release and ealer its

37 9 1 330

FRONT COVER: In the foreground gray cyclonic spirals of stratocumulus, as seen from the 54th Weather Reconnaissance Squadron WC-130 aircraft, define the eye of Typhoon Carmen (15W). The brighter patches in the mid-ground of the picture are more reflective water droplet clouds in the eye wall, which contrast with the other darker cloud debris and cirrus aloft. The previous day Carmen (15W) passed just 50 nm (93 km) north of the island of Guam. At picture time, 042355Z October 1986, the aircraft reconnaissance mission (AF966 0715 CARMEN) located the eye over the Philippine Sea 375 nm (695 km) northwest of Guam (Photo courtesy of Detachment 3, 1st Weather Wing and photographer Susan K. Watters, Captain, USAF).

1986 ANNUAL TROPICAL CYCLONE REPORT ERRATA SHEET

maken in the state of the

CHANGES FOLLOW.

STATE SECRECATION OF THE SECRETARY OF TH

- 1. Page iii Add 'Special thanks to Mr. Charles Mauck for his assistance with data reduction.'
- 2. Page iv TROPICAL CYCLONE '(13) TY ABBEY' should read, '(13) TY ABBY'.
- 3. Page vi 'CPA Closest Point to Approach' should read, 'CPA Closest Point of Approach'.
 - 4. Page vi "HATRACK" should read "HATTRACK".
- 5. Page vi definition for 'INJAH' should read, 'North Indian Ocean Component of TYAN'.
- 6. Page 2, under Section 4. ANALYSES, paragraph 2, in line 5 delete 'six' and replace with 'three'. On the next line delete '29,000 feet (8,839 m)' and replace with '31,000 feet (9,448m)'.
- 7. Page 5, paragraph under Section 1. GENERAL, last line 1985 should read, 1986...
- 8. Page 7, Figure 2-2 arrow is missing that indicates NOAA9 operations extended through December.
- 9. Page 10, last paragraph 'Tables 3-1 through 3-6' should read, 'Tables 3-1 through 3-4'.
- 10. Page 26, expanded section of best track the missing DTG should be 180000Z.
- 11. Page 52, Figure 3-08-2 text of caption should be switched with caption under Figure 3-08-5 on page 53 and visa versa.
 - 12. Page 81, first line delete 'digitally'.
- 13. Page 106, Figure 3-18-2 surface pressure report "09" at position 17.1N 154.3E should read, "009". Pressure report "08" at position 14.5N 154.5E should read, "008", and "8" at 17.8N 150.8E should read '008".
- 14. Page 117, Figure 3-21-1 on the image the labelling 'IDA' should read 'HERBERT' and 'JOE' should read, 'IDA'.
- 15. Page 133, Figure 3-25-1 in first line of caption delete 'passed south' and insert 'was approximately 500 nm (926 km) southeast'.
 - 16. Page 146 Best track for TCO3A should appear on page 150.

17. Page 147, Figure 3-01B-1 - on the image the labelling 'TC06S' should read 'TC04S'.

- 18. Page 150 Best track of TCO1B should appear on page 146.
- 19. Page 151, Figure 3-03A-1 in line 2 of the caption delete "Cyclone".
- 20. Page 151, Figure 3-03A-1 image should be rotated clockwise ninety degrees for proper orientation.
- 21. Page 171, in Section titled Tropical Cyclone Prediction Research Delete lines 19 through 24.
- 22. Page 171, in Section titled Automated Tropical Cyclone Forecasting System, second paragraph after line 2 insert the following text:

tropical cylone warning procedure. New forecasters can gather valuable hands-on experience of the warning procedure during their training period. Then add three additional blank lines before the start of the next Section titled, Tropical Cyclone Inner Regional Circulation Classification.

23. Page 172, Section titled Tropical Cyclone Condition Setting Aid - after line 7, which ends with 'evasion action that', delete the next 3 lines and add the following:

"would be unwarranted at lower risk levels. A rule for deciding such actions can be derived on an expected outcome basis (e.g. cost/benefits ratio). The CHARM model is now being adapted for seven North Pacific sites: Pearl Harbor, Guam, Subic Bay, Buckner Bay, Yokosuka, Sasebo, and Pusan."

- 24. Page 186, definition of TYPHOON/HURRICANE in line 3 delete "West" and insert "East".
- 25. Page 189 in Sadler, J. C. reference 'NAVENVPREDRSCHFACO' should read. 'NAVENVPREDRSCHFAC'.
- 26. Page 191 "NOCD, DIEGO GARCIA (20" should read, "NOCD, DIEGO GARCIA (2)".

U.S. NAVAL OCEANOGRAPHY COMMAND CENTER

JOINT TYPHOON WARNING CENTER

COMNAVMARIANAS BOX 17

FPO SAN FRANCISCO, CA 96630

*CHARLES G. STEINBRUCK

CAPTAIN, UNITED STATES NAVY COMMANDING OFFICER

CARL W. HOFFMAN

CAPTAIN, UNITED STATES NAVY
COMMANDING OFFICER

VERNON G. PATTERSON

LIEUTENANT COLONEL, UNITED STATES AIR FORCE

DIRECTOR, JOINT TYPHOON WARNING CENTER COMMANDER, DETACHMENT 1, 1ST WEATHER WING





*TRANSFERRED DURING 1986

This document has been approved for public release and suler its thanking is unlimited.

STAFF

LCDR George M. Dunnavan,	usn
*CAPT Boyce R. Columbus,	USAF
*CAPT Anita F. Dye,	USAF
LT John L. Shoemake,	USN
*CAPT Michael T. Gilford,	USAF
CAPT Susan V. Berry,	USAF
LT Brian J. Williams,	USN
CAPT Steven B. Dreksler,	USAF
*LT Mark J. Gunzelman,	usn
CAPT Robert F. Crosby,	USAF
LT Harry S. Gatanis,	USN

*AG2 TSGT	Kristopher W. Buttermore, Marguritta H. Smith,	USN USAF
*AG2	Kevin L. Cobb,	USN
AG2	Debra L. Mahoney,	USN
SSGT	Donald L. Novak,	USAF
*AG2	Erika L. Sauer,	USN
*SGT	Donna M. Curtis,	USAF
AG3	Deanna L. Hammack,	USN
AG3	Shirley A. Murdock,	USN
SGT	Angelia C. Gavin,	USAF
*SGT	Ronald W. Jones,	USAF
AG3	Susan M. Hickey,	USN
SRA	James B. Wiemann,	USAF
*AGAN	James P. Gallagher, Jr.,	USN
*AGAN	Steven M. Deola,	USN
AGAN	Sean L. Klope,	USN

EDITORS:

LT	Steve J.	Fatjo,	USN
MIR	Frank H.	. Wells,	CIV

CONTRIBUTOR:

	ment 1, 1WW - USAF lite Operations)	
	Frederick J. Svetz.	USAF
CAPT	•	
*CAPT	Donna P. McNamara,	USAF
1LT	Dan B. Mundell,	USAF
TSGT	Jeffrey L. Fleming,	USAF
*TSGT	William H. Taylor,	USAF
TSGT	Fabrice F. Clark,	USAF
SSCT	Robert C. Gray,	USAF
*SSGT	Paul F. Schirle,	USAF
*SSGT	Jerome P. Koch.	USAF

^{*}Transferred During 1986

FOREWORD

The Annual Tropical Cyclone Report is prepared by the staff of the Joint Typhoon Warning Center (JTWC), a combined USAF/USN organization operating under the command of the Commanding Officer, U.S. Naval Oceanography Command Center/Joint Typhoon Warning Center, Guam. JTWC was established in April 1959 when USCINCPAC directed USCINCPACFLT to provide a single tropical cyclone warning center for the western North Pacific region. The operations of JTWC are guided by CINCPACINST 3140.1 (series).

The mission of the Joint Typhoon Warning Center is multi-faceted and includes:

- 1) Continuous monitoring of all tropical weather activity in the northern and southern hemispheres, from 180 degrees longitude westward to the east coast of Africa, and the prompt issuance of appropriate advisories and alerts when tropical cyclone development is anticipated.
- 2. Issuing warnings on all significant tropical cyclones in the above area of responsibility.
- Determination of recomnaissance requirements for tropical cyclone surveillance and assignment of appropriate priorities.
- 4. Post-storm analysis of all significant tropical cyclones occurring within the western North Pacific and North Indian Oceans, which includes an in-depth analysis of tropical cyclones of note and all typhoons.
- 5. Cooperation with the Naval Environmental Prediction Research Facility, Monterey, California, on the operational evaluation of tropical cyclone models and forecast aids, and the development of new techniques to support operational forecast scenarios.

Satellite imagery used throughout this report represents data obtained by the tropical cyclone satellite surveillance network. The personnel of Detachment 1, lWW, collocated with JTWC at Nimitz Hill, Guam, coordinate the satellite acquisitions and tropical cyclone surveillance with the following units:

Det 4, 20WS, Hickam AFB, Hawaii

Det 5, 20WS, Clark AB, RP

Det 8, 20WS, Kadena AB, Japan

Det 15, 30WS, Osan AB, Korea

Air Force Global Weather Central, Offutt AFB, Nebraska

In addition, the Naval Oceanography Command Detachment, Diego Garcia, and DMSP equipped U.S. Navy aircraft carriers have been instrumental in providing vital satellite position fixes of tropical cyclones in the Indian Ocean.

Should JTWC become incapacitated, the Alternate Joint Typhoon Warning Center (AJTWC) located at the U.S. Naval Western Oceanography Center, Pearl Harbor, Hawaii, assumes warning responsibilities. Assistance in determining satellite recommaissance requirements, and in obtaining the resultant data, is provided by Det 4, 20WS Hickam AFB, Hawaii.

Changes to this year's publication include: raw fix data files usually printed in Annex A, plus the raw warning, forecast and best track data, will be available, upon request (the requested data will be copied onto 5.25 inch "floppy" diskettes provided by the requestor); statistical verification for individual warnings for the North Indian Ocean and all warnings in the southern hemisphere are not provided; and, with reference to best track philosophy, a conscious effort has been made to extend the post-warning best tracks to provide better verification for the 48- and 72-hour forecasts (this has produced a larger sample and slightly higher errors for the extended forecasts).

A special thanks is extended to the men and women of: 27th Information Systems Squadron, Operating Location C, for their continuing support by providing high quality real-time satellite imagery; the Pacific Fleet Audio-Visual Center, Guam for their assistance in the reproduction of satellite and graphics data for this report; to the Navy Publications and Printing Service Branch Office, Guam; the Royal Observatory Hong Kong and Central Weather Bureau, Taiwan for radar scope photographs of tropical cyclones; Mr. Ron Miller of NEPRF, for his able assistance in data reduction, and Captain S. K. Watters (USAF) for the cover photograph.

Note: Appendix IV contains information on how to obtain past issues of the Annual Tropical Cyclone Report (titled Annual Typhoon Report prior to 1980).



Access	sion For		
NTIS	GRA&I	ald .	Ī
DTIC 1	TA B	Θ	
Unann	ounced		
Just1:	fication	·	_
1	ibution/ lability		_
:	Avail a	nd/or	
្រានេង	Specia	al.	
A-1			

TABLE OF CONTENTS

CHAPTER I	OPERATIONAL PI			PAGE
	1. General -			1
	2. Data Source	ces		1
	3. Communicat	tions		1
	4. Analyses			2
	5. Forecast /	Aids		2
	6. Forecastin	ng Procedure	3	2
	7. Warnings			3
	8. Prognostic	Reasoning !	Messages	3 3
	9. Tropical (Cyclone Form	ation Alert	3
	10. Significar	nt Tropical	Weather Advisory	3
		•		_
CHAPTER II	RECONNAISSANCE	E AND FIXES		
				5
	2. Reconnaiss	ance Availa	oility	5
	3. Aircraft I	Reconnaissan	ce Summary	Ś
	4. Satellite	Reconnaissa	nce Summary	5 6
	5. Radar Reco	onnaissance	Summary	
	6. Tropical (volone Fix 1	Data	7
		,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		•
CHAPTER III	SUMMARY OF WES	STERN NORTH	PACIFIC AND NORTH IN	DIAN OCEAN
VIDE 112. 111	TROPICAL CYCLO		. AOL 10 100 1001111 110	D231. GG251
				9
			Tropical Cyclones -	
		DUAL TROPIC		,
	1140111	DOME THE TO	E CICLONIE	
TROPICAL CYCLON	E AUTHOR	PAGE	TROPICAL CYCLONE	ATTHOR PAGE
<u> </u>	<u> ROTHOL</u>	- 700	THE TOTAL CLOSE	TAGE
(OlW) TY JUDY	SHOEMAKE -	_ 18	(14W) TY BEN	CROSBY 88
(01W) TY JUDY (02W) TY KEN (03W) STY LOLA (04W) TS MAC (05W) TY NANCY	LIET CHIMAN .	10	(15W) TY CARMEN	DREKSLER - 94
(USM) SAN TULY	PATTO -	- 26	(16W) TS DOM	CBOSERY QR
(OUM) THE MAC	DEDDV	26	(17W) TY ELLEN	CROSBY 98 FATJO 100
(05W) TY NANCY (06W) TS OWEN (07W) STY PECGY (08W) TY ROGER (09W) TS SARAH		10	(18W) TY FORREST	CLARK 104
(UVA) LE UMEN	CATANTO -	40 Juli	(19W) TS GEORGIA	BERRY 110
(UOM) IS OWEN	CATANTO -	- 44 116	(30A) AS REDUCIN	CATRANTS 110
(OLM) DAY DOCED	COLUMBIC.	- 40	(20W) TS HERBERT (21W) TS IDA (22W) TY JOE (23W) STY KIM	MINIOT 1 114
(OOM) II NOUEN	COLUMBUS -	50	(SIM) WA TOD	MUNDELL 110
(11E) MY CHORD	DEALL - •	54	(22W) TY JOE	CUCOBI 150
	ETTE FATJO	20	(23W) STY KIM (24W) TS LEX (25W) TY MARGE	DREASLER - 124
(10W) TY TIP	FATJO	59	(24W) TS LEX	DREKSLER - 128
(11W) TY VERA	WILLIAMS -	68	(25W) TI MARGE	BERHY 132
(12W) TY WAYNE		10	(26W) TY NORRIS	BERRY 136
(13W) TY ABBEY	GATANIS -	84		
	3. North Indi	ian Ocean Tro	opical Cyclones	144
	T	TOTAL	AT CHOT ONDO	
	TUDIA	IDUAL TROPICA	AL CYCLUMES	
TENODE CONTRACTOR		2402	MEDODICAL CHARLOW	
TROPICAL CYCLON	E AUTHOR	PAGE	TROPICAL CYCLONE	AUTHOR PAGE
ma 015				
TC 01B			TC 02B	MUNUELL 148
TC 03A	BERRY	150		
CHAPTER IV		лн PACIFIC	AND SOUTH INDIAN OCE	AN IROPICAL
	CYCLONES			
	1. General -		th Indian Ocean Trop	152

CHAPTER V	1.	MARY OF FORECAST VERIFICATION Annual Forecast Verification
CHAPTER VI	NAV	ENVPREDRSCHFAC TROPICAL CYCLONE SUPPORT SUMMARY 171
ANNEX A	1.	PICAL CYCLONE TRACK AND FIX DATA General
APPENDICES	ı.	Definitions
	III.	Names of Tropical Cyclones
DISTRIBUTION		

AND RESISTED FOR STATE OF THE PROPERTY OF THE

CONTRACTIONS

ACRY Accuracy ELFV Elevation ACPT Aircraft Aircraft EP Exposed APP Automated Data Processing APROC Air Force Global Weather Central AFREY Aircraft Weather Report(s) (Commercial and Military) AFREY Aircraft Weather Report(s) (Commercial and Military) AFREY Aircraft Weather Report(s) (Commercial and Military) AFREY Apparent Area of Responsibility APPOC Fleet Annertial Commongraphy APROC Area of Responsibility APROC Apparent APPOC Generation Time APPOC Heat a Recommission APPOC Generation Time APPOC Heat a Recommission APPOC Generation Time APPOC Heat a Recommission APPOC Average APPOC Heat a Recommission APPOC Heat	ABS MAG	Absolute Magnitude	EL	Elongated
ADP Automated Data Processing FI Porecast Intensity (Dvorsk) APGMC Air Force Global Westher Central FLT Flight AIREP Aircraft Weather Report(s) (Commercial and Military) ANT Antenna FT Peet ARR Area of Responsibility OMT Greenwich Mean Time APRNT Apparent OGES Contactionary Operational Environmental Estellite AFRNT Apparent Promission Hattmack Burricane and Typhoon Tracking Steering Program ARRO Aerial Recognaissance Weather Officer Hotz Height Height Height Persistence and Climatology Blended Persistence and Climatology BYY Beavy BRC Bearing ICAO International Civil Aviation Organization BT LAT Best Track Latitude INJAH North Indian Ocean Component BT LAT Best Track Wind INST Instruction CO Central Dense Overcast IR Infrared CINCPAC Commander-in-Chief Pacific Area Air Gunder (Nau) Even Circulation Center CL Circiform Cloud or Circus also Current Intensity (Dorse) RM Maximum CL Circum Cloud or Circus Air Frack Indian Center INJAH Machina Center CL Circiform Cloud or Circus Air Gunder INJAH Machina Center CL Circiform Cloud or Circus Air Gunder INJAH Machina Center CL Circiform Cloud or Circus Air Gunder INJAH Machina Center CL Circiform Cloud or Circus Air Gunder INJAH Machina Center CL Circiform Cloud or Circus Air Gunder INJAH Machina Center CL Circiform Cloud or Circus Air Gunder INJAH Machina Center CL Circiform Cloud or Circus Air Gunder INJAH Machina Center CL Circiform Cloud or Circus Air Gunder INJAH Machina Center CL Circiform Cloud or Circus Air Gunder INJAH Machina Center CL Circiform Cloud or Circus Air Gunder INJAH Machina Center CL Circiform Cloud or Circus Air Gunder INJAH Maximum AND Meter(s) Personal Component CL Circiform Cloud or Circus Air Gunder INJAH Maximum AND Meter (s) Personal Center CR Cloosed Point to Approach CR Center CR Degree McUnd McMatty NESS Naval Environmental Dits Network NESS Naval Environmental Dits Network	ACCRY	Accuracy	ELEV	Elevation
APROC Air Force Global Weather Central AIREP Aircraft Weather Report(s) (Commercial and Military) ANT Antenna ARR Area of Responsibility Apparent APROC Apparent ALTONALIC Picture Transmission ARR APROC Apparent AUTOMATIC Picture Transmission ARR APROC Activation Picture Transmission ARR ARC Activated ART Automatic Picture Transmission ARR ARC Activated ART Automatic Picture Transmission ARR ARC Activated ART Automated Weather Officer ATT Automated Weather Network BRC Blended Persistence and Climatology BRC Blended Persistence and Climatology BRC Bearing BT LAT Best Track Latitude BT LAN Best Track Latitude BT LAN Best Track Longitude BT LAN Best Track Longitude BT LAN Best Track Longitude BRI LAN Best Track Wind CDC Central Dense Overcast CI Climatology CINCPAC Commander-In-Onlef Pacific AF - Air Force, FUT - Fleet (Navy) CID Cloud CLIM Climatology CR Center CAT Commander-In-Onlef Pacific AF - Air Force, FUT - Fleet (Navy) CID Cloud System Center CYCLOPS Tropical Cyclore Steering Program MIN Minimum DEFENSE Meterological Satellite Program DIRS Defense Meterological Satellite Program NED Naval Environmental Display Station	ACFT	Aircraft	EXP	Exposed
AIREP Aircraft Weather Report(s) (Commercial and Military) ANT Antenna FP Peet Area of Responsibility GMT Greenwich Mean Time APRINT Apparent APPRINT Apparent APPRINT Apparent APPRINT Apparent APPRINT Apparent APROL Apparent APROL Apparent APROL Apparent APROL Apparent ARROL Apparent ARRO	ADP	Automated Data Processing	FI	Forecast Intensity (Dvorak)
Commercial and Military) ANT Antenna ACR Area of Responsibility APRONT Apparent APRONT Apparent APRONT Apparent ARRO Aerial Recommaissance Weather Officer ATT Attenuated AVG Average ANN Automated Weather Network BENAMA BENAMA BENAMA AUtomated Weather Network BENAMA AUtomated Weather Network BENAMA BE	AFGWC	Air Force Global Weather Central	FLT	Flight
ACR Area of Responsibility OMT Greenwich Mean Time APRNT Apparent COES Geostationary Operational Environmental Satellite Environmental Environmental Environmental Climatology (March Environmental Climatology) ENV Heavy Beach Prock Latitude Environmental Civil Aviation Organization Environmental Civil Aviation Organization Instruction Environmental Civil Aviation Organization Instruction Instruction Commander-in-Chief Pacific Reposition Circiform Cloud or Circus also Current Intensity (Dvorak) CINCPAC Commander-in-Chief Pacific Reposition Circiform Cloud or Circus also Current Intensity (Dvorak) CID Cloud CLIM Climatology CLOUD Reter Reterological MAX Maximum MAX Maximum MAX Maximum MILIDRATICAL MATTRACK MOVIG Moving CYCLOPS Tropical Cyclone Steering Program (MATTRACK and MCMATT) MONATT Modified HATTRACK MOVIG Moving DIAM Diameter DIAM Diameter MEDN Naval Environmental Diaplay Station MEDN Naval Environmental Diaplay Station	AIREP		FNOC	
APRINT Apparent Apparent April Automatic Picture Transmission HATRACK Environmental Satellite Environm	ANT	Antenna	FT	Feet
APT Automatic Picture Transmission APMO Aerial Reconnaissance Weather Officer ATT Attenuated AVERAGE AVERAGE AVERAGE ANN Automated Weather Network BPAC Blended Persistence and Climatology BPAC Blended Persistence and Climatology BFI LAT Best Track Latitude BT LAT Best Track Longitude BT LAN Best Track Longitude BT LAT Instruction COC Central Dense Overcast IR Instruction CHINTER Commander-in-Chief Pacific AF - Air Force, FLT - Fleet (Navy) LICC Low-Level Circulation Center LIVL Level CLIM Climatology M Meter(s) per Second CM Centimeter MAX Maximum CMTR COC Cloud System Center MAX Maximum METALT Medicied HATTRACK MOVIG Moving DIAM Diameter MET Meterological MIN Minimum Sea-level Pressure DIAM Diameter MET Meterological MATTRACK and MCHATT) MCHATT	ACIR	Area of Responsibility	CMT	Greenwich Mean Time
APT Automatic Picture Transmission ARTMACK Automatic Picture Transmission ARTMACK Automated Weather Officer HOT Height Average HOT Height Automated Weather Network HR(S) Hour(s) BPAC Blended Persistence and Climatology HVY Heavy BPAC Blended Persistence and Climatology INT Initial BPAC Blen	APRIVIT	Apparent	COES	
AFMOR Methor Officer Actean Recommaissance Weather Officer Steering Program ATT Attenuated HPAC Height AVG Average (Half Persistence and CLIM Techniques (Half Persistence and Climatology) ANN Automated Weather Network HR(S) Hour(s) BPAC Blended Persistence and Climatology HVY Heavy BFG Bearing ICAO International Civil Aviation Organization BF LAT Best Track Latitude INIT Initial BF LAT Best Track Longitude INIT Initial BF WN Best Track Longitude INIT Instruction CD Central Dense Overcast IR Infrared CI Cirrifora Cloud or Cirrus also Current Intensity (Dvorak) KM Kilometer(s) CINCPAC Commander-in-Chief Pacific AF - Air Porce, FLT - Fleet (Navy) KT Knot(s) CLOUD Cloud IVL Level CLIM Climatology M Meter(s) CLSD Closed N/S Meter(s) CMT	APT	Automatic Picture Transmission	HATRACK	
AVE Average HPAC (Haif Persistence and Climatology) ANN Automated Weather Network HR(S) Hour(s) BPAC Blended Persistence and Climatology HVY Heavy BRG Bearing ICAO International Civil Aviation Organization BT LAT Best Track Latitude INIT Initial BT LON Best Track Longitude INJAH North Indian Ocean Component BT WN Best Track Wind INST Instruction CDO Central Dense Overcast IR Infrared CI Cirriform Cloud or Cirrus also Current Intensity (Dvorak) CINCPAC Commander-in-Onief Pacific AF - Air Force, FLT - Fleet (Navy) CLD Cloud LVL Level CLIM Climatology M Meter(s) CLOUD Cloud LVL Level CLIM Climatology M Meter(s) CLOUD Continued MAX Maximum CNTR Center MAX Maximum CNTR Center MB Millibar(s) CRC Cloud System Center MIN Minimum CYCLOPS Tropical Cyclone Steering Program (HATTRACK and MCHATT) DISP Defense Meterological Satellite Program DISP Defense Meterological Satellite Program NEDN Naval Environmental Display Station	ARWO			Steering Program
AWR Automated Weather Network HR(S) Hour(s) BPAC Blended Persistence and Climatology HVY Heavy BRG Bearing ICAO International Civil Aviation Organization BT LAT Best Track Latitude INIT Initial ET LON Best Track Longitude INJAH North Indian Ocean Component ET WN Best Track Wind INST Instruction CDO Central Dense Overcast IR Infrared CI Cirriform Cloud or Cirrus Intensity (Dvorak) IR Infrared CINCPAC Commander-in-Chief Pacific AF - Air Force, FLT - Fleet (Navy) ILCC Low-Level Circulation Center CLIM Climatology M Meter(s) CLIM Climatology M Meter(s) CLIM Climatology M M Meter(s) CLIM Centimeter MAX Maximum CNTR Center MB Millibar(s) CSC Cloud System Center MB Millibar(s) CSC Cloud System Center MIN Minimum CYCLOPS Tropical Cyclone Steering Program (HATTRACK and MOHATT) MOHATT Modified HATTRACK DEG Degree METEROlogical Satellite MSN MAY Navigational DIRP Direction MSN Mission DISSP Defense Meterological Satellite NAV Navigational Program NAVA NAVI SAVIDAL NAVA NAVIGATIONAL DISSP Defense Meterological Satellite NAV NAVIGATIONAL DISSP Distance NEEDS NAVAL Environmental Display Station	ATT	Attenuated		•
BPAC Blended Persistence and Climatology HVY Heavy BRG Bearing ICAO International Civil Aviation Organization BT LAT Best Track Latitude INIT Initial BT LAN Best Track Longitude INIT Initial BT LAN Best Track Wind INST Instruction CDO Central Dense Overcast IR Infrared CI Cirriform Cloud or Cirrus also Current Intensity (Dvorak) KM Kilometer(s) CINCPAC Commander-in-Chief Pacific KT Knot(s) AP - Air Force, FLT - Fleet (Navy) LLCC Low-Level Circulation Center CLIM Climatology M Meter(s) CLIM Climatology M Meter(s) CHO Centimeter MAX Maximum CMTR Center MAX Maximum CMTR Center MB Millibar(s) CSC Cloud System Center MIN Minimum CYCLOPS Tropical Cyclone Steering Program (MATTRACX and MCHATT) DEG Degree Moving DIAM Diameter MSLP Minimum Sea-level Pressure DIR Direction MSN Mission DMSP Defense Meterological Satellite Program NEDN Naval Environmental Data Network DIST Distance	AVG	Average	HPAC	
BEG Bearing ICAO International Civil Aviation Organization BT LAT Best Track Latitude INIT Initial BT LON Best Track Longitude INJAH North Indian Ocean Component BT WN Best Track Wind INST Instruction CDO Central Dense Overcast IR Infrared CI Cirriform Cloud or Cirrus also Current Intensity (Dvorak) KM Kilometer(s) CINCPAC Commander-in-Chief Pacific AF - Air Force, FLT - Fleet (Navy) CLD Cloud CLIM Climatology M Meter(s) CLSD Closed M/S Meter(s) per Second CM Centimeter MAX Maximum CNTR Center MB Millibar(s) CPA Closest Point to Approach CSC Cloud System Center MIN Minimum CYCLOPS Tropical Cyclone Steering Program (MATTRACK and MCMATT) DEG Degree MOVG MOVING DIAM Diameter MSLP Minimum Sea-level Pressure DIAM Diameter MSLP Minimum Sea-level Pressure DIR Direction MSN Mission DESC Distance NEED Naval Environmental Data Network DESC Distance NEED NEVE Environmental Data Network DESC Distance NEED NEVE Environmental Data Network	AWN	Automated Weather Network	HR(S)	Hour(s)
BT LAT Best Track Latitude INIT Initial BT LON Best Track Longitude INIT Initial BT LON Best Track Longitude INIT Initial BT WN Best Track Wind INST Instruction CO Central Dense Overcast IR Infrared CI Cirriform Cloud or Cirrus also Current Intensity (Dvorak) KM Kilometer(s) CINCPAC Commander-in-Chief Pacific KT Knot(s) CLD Cloud LVL Level CLIM Climatology M Meter(s) CLSD Closed M/S Meter(s) per Second CM Centimeter MAX Maximum CMTR Center MB Millibar(s) CPA Closest Point to Approach MET Meteorological CYCLOPS Tropical Cyclone Steering Program (HATTRACK and MDHATT) DEG Degree MOVG Moving DIAM Diameter MSLP Minimum Sea-level Pressure DIAM Diameter MSN Mission DIST Distance Nave Environmental Data Network DEST Distance NEDS Naval Environmental Data Network	BPAC	Blended Persistence and Climatology	HVY	Heavy
BY LAT Best Track Longitude INIT Initial BY WN Best Track Wind INJAH North Indian Ocean Component CDO Central Dense Overcast IR Instruction CI Cirriform Cloud or Cirrus also Current Intensity (Dvorak) KM Kilometer(s) CINCPAC Commander-in-Chief Pacific AF - Air Force, FLT - Fleet (Navy) KT Knot(s) CLD Cloud LVL Level Circulation Center CLM Climatology M Meter(s) CLSD Closed M/S Meter(s) CNTR Center MAX Maximum CNTR Center MB Millibar(s) CPA Closest Point to Approach MET Meteorological CSC Cloud System Center MIN Minimum CYCLOPS Tropical Cyclone Steering Program (HATTRACK and MCHATT) MOHATT Modified HATTRACK DEG Degree MOVG Moving DIAM Diameter MSLP Minimum Sea-level Pressure DIR Direction	BRG	Bearing	ICAO	
BT LON Best Track Longitude INJAH North Indian Ocean Component BT WN Best Track Wind INST Instruction CDO Central Dense Overcast IR Infrared CI Cirriform Cloud or Cirrus also Current Intensity (Dvorak) KM Kilometer(s) CINCPAC Commander-in-Chief Pacific AF - Air Force, FLT - Fleet (Navy) KT Knot(s) CLD Cloud LVL Level Circulation Center CLIM Climatology M Meter(s) CLIM Closed M/S Meter(s) CM Centimeter MAX Maximum CNTR Center MAX Maximum CPA Closest Point to Approach MET Meteorological CSC Cloud System Center MIN Minimum CYCLOPS Tropical Cyclone Steering Program MOHATT Modified HATTRACK DEG Degree MOVG Moving DIAM Direction MSN Minimum Sea-level Pressure DISP Defense Meterological Satellite Pr	BT LAT	Best Track Latitude	TNITT	•
BT WN Best Track Wind INST Instruction CDO Central Dense Overcast IR Infrared CI Cirriform Cloud or Cirrus also Current Intensity (Dvorak) KM Kilometer(s) CINCPAC Commander-in-Chief Pacific AF - Air Force, FLT - Fleet (Navy) KT Knot(s) CLD Cloud LVL Level Circulation Center CLIM Climatology M Meter(s) CLSD Closed M/S Meter(s) CM Centimeter MAX Maximum CMTR Center MB Millbar(s) CPA Closest Point to Approach MET Meteorological CSC Cloud System Center MIN Minimum CYCLOPS Tropical Cyclone Steering Program (MATTRACK and MOHATT) MOHATT Modified HATTRACK DEG Degree MOVG Moving DIAM Direction MSLP Minimum Sea-level Pressure DISP Defense Meterological Satellite Program NAV Navigational DIST Distance </td <td>BL TON</td> <td>Best Track Longitude</td> <td></td> <td></td>	BL TON	Best Track Longitude		
CI Cirriform Cloud or Cirrus also Current Intensity (Dvorak) CINCPAC Commander-in-Chief Pacific AF - Air Force, FLT - Pleet (Navy) CLD CLOUD C	BT WN	Best Track Wind		•
CI Cirriform Cloud or Cirrus also Current Intensity (Dvorak) CINCPAC Commander-in-Chief Pacific AF - Air Force, FLT - Fleet (Navy) CLD Cloud CLD Cloud CLIM Climatology CLSD Closed CM Centimeter CMT CHIM Center CMT Center CHA Closest Point to Approach CSC Cloud System Center CYCLOPS Tropical Cyclone Steering Program (HATTRACK and MOHATT) DIAM Diameter DIAM Diameter DIAM Direction DEST Defense Meterological Satellite Program NED NED NED Nevigational NET Minimum Modified HATTRACK Minimum Minimum Modified HATTRACK Modified	000	Central Dense Overcast		
AF - Air Force, FLT - Fleet (Navy) CLD Cloud LVL Level CLIM Climatology M Meter(s) Closed CM Centimeter CMTR Center CONTR Closest Point to Approach CSC Cloud System Center CYCLOPS Tropical Cyclone Steering Program (HATTRACK and MOHATT) DEG Degree DIAM Diameter DIAM Direction MSN Mission NAV LUC Low-Level Circulation Center M Meter(s) Meter(s) per Second MAX Maximum MAX Maximum MET Meteorological MIN Minimum Minimum MohATT Modified HATTRACK MOVG MOVING MOVING DIAM Diameter MSLP Minimum Sea-level Pressure DIAM Direction MSN Mission MSSP Defense Meterological Satellite Program NED Naval Environmental Data Network DES Distance	CI			
CLD Cloud LVL Level CLIM Climatology M Meter(s) CLSD Closed M/S Meter(s) per Second CM Centimeter MAX Maximum CNTR Center MB Millibar(s) CSC Cloud System Center MIN Minimum CYCLOPS Tropical Cyclone Steering Program (HATTRACK and MOHATT) MOHATT Modified HATTRACK DEG Degree MOVG Moving DIAM Diameter MSLP Minimum Sea-level Pressure DIR Direction MSN Mission DMSP Defense Meterological Satellite Program DIST Distance NEUS Naval Environmental Data Network DEST NEUS Naval Environmental Display Station	CINCPAC	Commander-in-Chief Pacific	КT	Knot(s)
CLIM Climatology CLSD Closed CM Centimeter CMTR Center CPA Closest Point to Approach CSC Cloud System Center CYCLOPS Tropical Cyclone Steering Program (HATTRACK and MOHATT) DEG Degree DIAM Diameter DIR Direction DISP Defense Meterological Satellite Program CMTN NAV Navigational NEDN Naval Environmental Data Network NEDS Naval Environmental Display Station		AF - Air Force, FLT - Fleet (Navy)	LLCC	Low-Level Circulation Center
CLSD Closed M/S Meter(s) per Second CM Centimeter MAX Maximum CNTR Center NB Millibar(s) CPA Closest Point to Approach MET Meteorological CSC Cloud System Center MIN Minimum CYCLOPS Tropical Cyclone Steering Program (HATTRACK and MOHATT) MOHATT Modified HATTRACK DEG Degree MOVG Moving DIAM Diameter MSLP Minimum Sea-level Pressure DIR Direction MSN Mission DMSP Defense Meterological Satellite NAV Navigational Program NEDN Naval Environmental Data Network DST Distance MEDS Naval Environmental Display Station	CITD	Cloud	LVL	Level
CM Centimeter		-	M	Meter(s)
CNTR Center CPA Closest Point to Approach CSC Cloud System Center CYCLOPS Tropical Cyclone Steering Program (HATTRACK and MOHATT) DEG Degree DIAM Diameter DIR Direction MSN Mission MSN Mission MSP Minimum Sea-level Pressure MIN Minimum MOHATT Modified HATTRACK MOVG Moving MSLP Minimum Sea-level Pressure MSLP Minimum Sea-level Pressure MSSP Defense Meterological Satellite Program NEDN Naval Environmental Data Network NEDS Naval Environmental Display Station			M/S	Meter(s) per Second
CPA Closest Point to Approach CSC Cloud System Center CYCLOPS Tropical Cyclone Steering Program (HATTRACK and MOHATT) DEG Degree Moving DIAM Diameter MSLP Minimum Sea-level Pressure DIR Direction MSN Mission DMSP Defense Meterological Satellite Program Program NAV Navigational NEDN Naval Environmental Data Network NEDS Naval Environmental Display Station			MAX	Maximum
CSC Cloud System Center MIN Minimum CYCLOPS Tropical Cyclone Steering Program (HATTRACK and MCHATT) DEG Degree MCVG Moving DIAM Diameter MSLP Minimum Sea-level Pressure DIR Direction MSN Mission DMSP Defense Meterological Satellite NAV Navigational Program DST Distance NEDS Naval Environmental Data Network			MB	Millibar(s)
CYCLOPS Tropical Cyclone Steering Program (HATTRACK and MOHATT) DEG Degree Moving DIAM Diameter MSLP Minimum Sea-level Pressure DIR Direction MSN Mission DMSP Defense Meterological Satellite NAV Navigational Program NEDN Naval Environmental Data Network NEDS Naval Environmental Display Station		••	MET	Meteorological
DEG Degree MOVG Moving DIAM Diameter MSLP Minimum Sea-level Pressure DIR Direction MSN Mission DMSP Defense Meterological Satellite NAV Navigational Program NEDN Naval Environmental Data Network DST Distance Needs Naval Environmental Display Station		•	MIN	Minimum
DIAM Diameter MSLP Minimum Sea-level Pressure DIR Direction MSN Mission DMSP Defense Meterological Satellite NAV Navigational Program NEDN Naval Environmental Data Network DST Distance NEDS Naval Environmental Display Station	CICLIPS		MOHATT	Modified HATTRACK
DIR Direction MSN Mission DMSP Defense Meterological Satellite NAV Navigational NEDN Naval Environmental Data Network DST Distance NEDS Naval Environmental Display Station	DEG	Degree	MOVG	Moving
DMSP Defense Meterological Satellite NAV Navigational Program NEDN Naval Environmental Data Network DST Distance NEDS Naval Environmental Display Station	DIAM	Diameter	MSLP	Minimum Sea-level Pressure
Program NEDN Naval Environmental Data Network DST Distance NEDS Naval Environmental Display Station	DIR	Direction	MSN	Mission
DST Distance NEDS Naval Environmental Data Network NEDS Naval Environmental Display Station	DMSP	_	NAV	Navigational
NEDS Naval Environmental Display Station	DST	_	NEDN	Naval Environmental Data Network
			NEDS	Naval Environmental Display Station

NEPRF	Naval Environmental Prediction Research Facility	TOM	Tropical Cyclone Model
NESDIS	National Environmental Satellite.	TD	Tropical Depression
	Data, and Information Service	TDO	Typhoon Duty Officer
NET	Near Equatorial Trough	TIROS	Television Infrared Observational Satellite
NM	Nautical Mile(s)	TPAC	Extrapolation and Climatology
N/O	Not Observed		Blend
NOAA	National Oceanic and Atmospheric Administration	TS	Tropical Storm
NOCC	Naval Oceanography Command Center	TY	Typhoon
NOGAPS	Navy Operational Global Atmospheric	TYAN	Typhoon Analog Program
	Prediction System	TYPN	Western North Pacific Component (Revised) of TYAN
NTCM	Nested Tropical Cyclone Model	TUTT	Tropical Upper-Tropospheric
NWCC	Naval Western Oceanography Center		Trough
NR	Number	ULAC	Upper-Level Anticyclone
NRL	Naval Research Laboratory	ULCC	Upper-Level Circulation Center
OBS	Observations	VEL	Velocity
OTCM	One Way (Interactive) Tropical Cyclone Model	VIS	Visual
PACOM	Pacific Command	VMVT	Vector Movement (ddff)
PCN	Position Code Number	WESTPAC	Western (North) Pacific
POS ER	Position Error	WMO	World Meteorology Organization
PSBL	Possible	WND	Wind
PTLY	Partly	WEING(S)	Warming(s)
QUAD	Quadrant	WRS	Weather Reconnaissance Squadron
RADOB	Radar Observation	ww er	Wind Warning Error
RECON	Reconnaissance	W#	Warning Number
FING	Range	XTRP	Extrapolation
RT	Right	Z	Zulu Time (Greenwich Mean Time)
SAT	Satellite	24 ER	24-Hour (Position) Error
SPC	Surface	48 ER	48-Hour (Position) Error
SLP	Sea-Level Pressure	72 ER	72-Hour (Position) Error
SRP	Selective Reconnaissance Program	24 WE	24-Hour Wind (Warning) Error
STNRY	Stationary	48 WE	48-Hour Wind (Warning) Error
SST	Sea Surface Temperature	72 WE	72-Hour Wind (warning) Error
ST	Subtropical		
STR	Subtropical Ridge		
STY	Super Typhoon		
TAPT			
	Typhoon Acceleration Prediction Technique		
TC			
TC TCARC	Prediction Technique		

CHAPTER I - OPERATIONAL PROCEDURES

1. GENERAL

The Joint Typhoon Warning Center (JTWC) provides a variety of routine services to the organizations within its area of responsibility, including:

- a. Significant Tropical Weather Advisories: issued daily, these products describe all tropical disturbances and assess their potential for further development during the advisory period;
- b. Tropical Cyclone Formation Alerts: issued when synoptic, satellite and/or aircraft reconnaissance data indicate development of a significant tropical cyclone in a specified area is likely;
- c. Tropical Cyclone Warnings: issued periodically throughout each day for significant tropical cyclones, giving forecasts of position and intensity of the system; and
- d. Prognostic Reasoning Messages: issued twice daily for tropical storms and typhoons in the western North Pacific; these messages discuss the rationale behind the most recent JTWC warnings.

The recipients of the services of JTWC essentially determine the content of JTWC's products according to their ever changing requirements. Therefore, the spectrum of routine services is subject to change from year to year. Such changes are usually the result of deliberations held at the Annual Tropical Cyclone Conference.

2. DATA SOURCES

a. COMPUTER PRODUCTS:

A standard array of synoptic-scale computer analyses and prognostic charts are available from the Fleet Numerical Oceanography Center (FLENUMOCEANCEN) at Monterey, California. These products are provided to JTWC via the Naval Environmental Data Network (NEDN).

b. CONVENTIONAL DATA:

This data set is comprised of land-based and shipboard surface and upper-air observations taken at, or near, synoptic times, cloud-motion winds derived twice daily from satellite data, and enroute meteorological observations from commercial and military aircraft (AIREPS) within six hours of synoptic times. Conventional data charts are prepared daily at 00002 and 12002 using computer- and hand-plotted data for the surface/gradient and 200 mb (upper-tropospheric) levels. In addition to these analyses, charts at the 925, 850, 700, 500 and 400 mb levels are computer-plotted from rawinsonde/pibal observations at the 12-hour synoptic times.

c. AIRCRAFT RECONNAISSANCE:

Data provided by aircraft weather reconnaissance are invaluable for locating the position of the center of developing systems and essential for the accurate determination of:

- maximum surface and flight-level wind
- minimum sea-level pressure
- horizontal surface and flight-level wind distribution
 - eye/center temperature and dew point

In addition, wind and pressure-height data at the 500 and/or 400 mb levels, provided by the aircraft while enroute to, or from fix missions, or during dedicated synoptic-scale flights, provide a valuable supplement to the all too sparse data fields of JTWC's area of responsibility. A more detailed discussion of aircraft weather recommaissance is presented in Chapter II.

d. SATELLITE RECONNAISSANCE:

Meteorological satellite data obtained from the Defense Meteorological Satellite Program (DMSP) and National Oceanic and Atmospheric Administration (NOAA) spacecraft played a major role in the early detection and tracking of tropical cyclones in 1986. A discussion of the role of these programs is presented in Chapter II.

e. RADAR RECONNAISSANCE:

During 1986, as in previous years, land-based radar coverage was utilized extensively when available. Once a tropical cyclone moved within the range of land-based radar sites, their reports were essential for determination of small-scale movement. Use of radar reports during 1986 is discussed in Chapter II.

3. COMMUNICATIONS

- a. JTWC currently has access to three primary communications circuits.
- (1) The Automated Digital Network (AUTODIN) is used for dissemination of warnings, alerts and other related bulletins to Department of Defense installations. These messages are relayed for further transmission over U.S. Navy Fleet Broadcasts, and U.S. Coast Guard CW (continuous wave Morse Code) and voice broadcasts. Inbound message traffic for JTWC is received via AUTODIN addressed to NAVOCEANCOMCEN GQ or DET 1 1WW NIMITZ HILL GQ.
- (2) The Air Force Automated Weather Network (AWN) provides weather data to JTWC through a dedicated circuit from the Automated Digital Weather Switch (ADWS) at Hickam AFB, Hawaii. The ADWS selects and routes the large volume meteorological reports necessary to satisfy JTWC requirements for the right data at the right time. Weather bulletins prepared by JTWC are inserted into the AWN circuit via the Naval Environmental Display Station (NEDS) through the Nimitz Hill Naval Telecommunications Center (NTCC) of the Naval Communications Area Master Station Western Pacific.
- (3) The Naval Environmental Data Network (NEDN) is the communications link with the computers at FLENUMOCEANCEN. JTWC is able to receive environmental data from FLENUMOCEANCEN and provide data directly to the computers to execute numerical techniques.
- b. NEDS has been the backbone of the JTWC communications system for several years. Currently, JTWC is undergoing an upgrade that will make use of microcomputer technology and automate much of the work that goes into message preparation and transmission. This will decrease the workload on the NEDS and allow JTWC to interface directly with NTCC for AWN and AUTODIN messages.

1

4. ANALYSES

A composite surface/gradient level (3000 ft (914 m)) manual analysis of the JTWC area of responsibility is accomplished on the 0000Z and 1200Z conventional data. Analysis of the wind field using streamlines is stressed for tropical and subtropical regions. Analysis of the pressure field outside the tropics is accomplished routinely by the Naval Oceanography Command Center Operations watch team and is used by JTWC in conjunction with their analysis of the tropical wind fields.

A composite upper-tropospheric manual streamline analysis is accomplished daily utilizing rawinsonde data from 300 mb through 100 mb, winds obtained from satellite-derived cloud motion analysis, and AIREPS (taken plus or minus six hours of chart valid time) at or above 29,000 feet (8,839m). Wind and height data are used to generate a representative analysis of tropical cyclone outflow patterns, mid-latitude steering currents, and features that may influence tropical cyclone intensity. All charts are hand-plotted in the tropics to provide all available data as soon as possible to the Typhoon Duty Officer (TDO). These charts are augmented by computer-plotted charts for the final analysis.

Computer-plotted charts for the 925, 850, 700, 500 and 400 mb levels are available for streamline and/or height-change analysis from the 0000Z and 1200Z data base. Additional sectional charts at intermediate symoptic times and auxiliary charts, such as station-time plot diagrams and pressure-change charts, are also analyzed during periods of significant tropical cyclone activity.

5. FORECAST AIDS

The following objective techniques were employed in tropical cyclone forecasting during 1986 (a description of these techniques is presented in Chapter V):

a. MOVEMENT

- (1) 12-HOUR EXTRAPOLATION
- (2) CLIMATOLOGY
- (3) COSMOS (Model Output Statistics)
- (4) NTCM (Nested Grid Dynamic Model)
- (5) OTCM (Dynamic Model)
- (6) TAPT (Empirical)
- (7) TPAC (Extrapolation and Climatology Blend)
- (8) TYAN78 (Analog)

b. INTENSITY

- (1) CLIMATOLOGY
- (2) DVORAK (Empirical)
- (3) THETA E (Empirical)

c. WIND RADIUS

6. FORECAST PROCEDURES

a. INITIAL POSITIONING

The warning position is the best estimate of the center of the surface circulation at synoptic time. It is estimated from an analysis of all fix information received up to one and one-half hours after synoptic time. This analysis is based on a semi-objective weighting of fix information based on the historical accuracy of the fix platform and the meteorological features used for the fix. The interpolated warning position reduces the weighting of any single fix and results in a more consistent movement and a warning position that is more representative of the larger-scale circulation. If the fix data are not available due to reconnaissance platform malfunction or communication problems, synoptic data or extrapolation from previous fixes are used.

b. TRACK FORECASTING

A preliminary forecast track is developed based on an evaluation of the rationale behind the previous warning and the guidance given by the most recent set of objective techniques and numerical prognoses. This preliminary track is then subjectively modified based on the following considerations:

- (1) The prospects for recurvature or erratic movement are evaluated. This determination is based primarily on the present and forecast positions and amplitudes of the middle-tropospheric, mid-latitude troughs and ridges as depicted on the latest upper-air analysis and numerical forecasts.
- (2) Determination of the best steering level is partly influenced by the maturity and vertical extent of the tropical cyclone. For mature tropical cyclones located south of the subtropical ridge axis, forecast changes in speed of movement are closely correlated with anticipated changes in the intensity or relative position of the ridge. When steering currents are relatively weak, the tendency for tropical cyclones to move northward due to internal forces is an important consideration.
- (3) Over the 12- to 72-hour (12- to 48-hour in the southern hemisphere) forecast period, speed of movement during the early forecast period is usually biased towards persistence, while the later forecast periods are biased towards objective techniques. When a tropical cyclone moves poleward, and toward the mid-latitude steering currents, speed of movement becomes increasingly more biased toward a selective group of objective techniques capable of estimating acceleration.
- (4) The proximity of the tropical cyclone to other tropical cyclones is closely evaluated to determine if there is a possibility of binary interaction.

A final check is made against climatology to determine whether the forecast track is reasonable. If the forecast deviates greatly from one of the climatological tracks, the forecast rationale may be reappraised.

c. INTENSITY FORECASTING

For this parameter, heavy reliance is placed on intensity trends from aircraft reconnaissance reports, wind and pressure data from ships and land stations in the vicinity of the tropical cyclone, the Dvorak satellite empirical model and climatology. An evaluation of the entire synoptic situation is made, including the location of major troughs and ridges, the position and intensity of any nearby tropical upper-tropospheric troughs (TUTTs), the vertical and horizontal extent of the tropical cyclone's circulation and the extent of the associated upper-level outflow pattern. An essential element affecting each intensity forecast is the accompanying forecast track and the environmental influences along that track, such as terrain, vertical wind shear, and the existence of an extratropical environment.

Once the forecast intensities have been derived, the horizontal distribution of surface winds (winds greater than 30-, 50-, and 100-knots) is determined. The most recent wind radii and associated asymmetrics are deduced from all available surface wind observations and reconnaissance aircraft reports. Based on the current surface wind distribution, preliminary estimates of future wind radii are provided by an empirically derived objective technique. These estimates may be subjectively modified based upon the anticipated interaction of the tropical cyclone's circulation with forecast locations of large-scale wind regimes and significant land masses. Other factors including the tropical cyclone's speed of novement and possible extratropical transition are also considered.

7. WARNINGS

Tropical cyclone warnings are issued when a closed circulation is evident and maximum sustained winds are forecast to increase to 34 knots (18 meters per second) within 48 hours, or if the tropical cyclone is in such a position that life or property may be endangered within 72 hours. Warnings may also be issued in other situations if it is determined that there is a need to alert military or civil interests to threatening tropical weather conditions.

Each tropical cyclone warning is numbered sequentially and includes the following information: the position of the surface center; estimate of the position accuracy and the supporting reconnaissance (fix) platforms; the direction and speed of movement during the past six hours (past 12-hours in the southern hemisphere); the intensity and radial extent of over 30-, 50-, and 100-knot surface winds, when applicable. At forecast intervals of 12-, 24-, 48-, and 72-hours (12-, 24-, and 48-hours in the southern hemisphere), information on the tropical cyclone's anticipated position, intensity and wind radii are also provided. Vectors indicating the mean direction and mean speed between forecast positions are also included in all warnings.

Warnings in the western North Pacific and North Indian Oceans are issued every six hours valid at standard times; 0000Z, 0600Z, 1200Z and 1800Z (every 12-hours; 0000Z, 1200Z or 0600Z, 1800Z in the southern hemisphere). All warnings are released to the communications network no earlier than synoptic time and no later than synoptic time plus two and one-half hours so that recipients will have a reasonable expectation of having all warnings "in hand" by synoptic time plus three hours (0300Z, 0900Z, 1500Z and 2100Z).

Warning forecast positions are later verified against the corresponding "best track" positions (obtained during detailed post-storm analysis to determine the actual path and intensity of the cyclone). A summary of the verification results for 1986 for the North Indian and western North Pacific Ocean is present in Chapter V.

8. PROGNOSTIC REASONING MESSAGES

For tropical storms and typhoons in the western North Pacific Ocean, prognostic reasoning messages are transmitted following the 00002 and 12002 warnings, or whenever the previous forecast reasoning is no longer valid. This plain language message is intended to provide meteorologists with the reasoning behind the latest forecast.

In addition to this message, prognostic reasoning information applicable to all customers is provided in the remarks section of warnings when significant forecast changes are made or when deemed appropriate by the TDO.

9. TROPICAL CYCLONE FORMATION ALERT

Tropical Cyclone Formation Alerts (TCFAs) are issued whenever interpretation of satellite imagery and other meteorological data indicate that the formation of a significant tropical cyclone is likely. These formation alerts will specify a valid period not to exceed twenty-four hours and must either be cancelled, reissued, or superseded by a tropical cyclone warning prior to the expiration of the valid time.

10. SIGNIFICANT TROPICAL WEATHER ADVISORY

This product contains a general, non-technical description of all tropical disturbances in JTWC's area of responsibility (AOR) and an assessment of their potential for further (tropical cyclone) development. In addition, all tropical cyclones in warning status are briefly discussed. Two separate messages are issued daily and are valid for a 24-hour period. The Significant Tropical Weather Advisory for the Western Pacific Ocean (ABPW PGTW) covers the area east of 100 degrees East Longitude to the dateline and is issued by 0600Z. The Significant Tropical Weather Advisory for the Indian Ocean (ABIO PGTW) covers the area west of 100 degrees East Longitude to the coast of Africa and is issued by 1800Z. It is reissued whenever the situation warrants. For each suspect area, the words "poor", "fair", and "good" are used to describe the potential for further development. "Poor" is used to describe a tropical disturbance that is not expected to require a TCFA during the advisory period; "fair" is used to describe a tropical disturbance that is currently not covered by a TCFA, but for which it is likely that a TCFA will be issued during the advisory period; and "good" is used when the tropical disturbance is covered by a TCFA.

CHAPTER II - RECONNAISSANCE AND FIXES

1. GENERAL

The Joint Typhoon Warning Center depends on recommaissance to provide necessary, accurate, and timely meteorological information in support of each warning. JTWC relies primarily on three recommaissance platforms: aircraft, satellite, and radar. In data rich areas, synoptic data are also used to supplement the above. Optimum utilization of all available recommaissance resources is obtained through the Selective Recommaissance Program (SRP); various factors are considered in selecting a specific recommaissance platform including capabilities and limitations, and the tropical cyclone's threat to life and property both afloat and ashore. A summary of recommaissance fixes received during 1985 is included in Section 6 of this chapter.

2. RECONNAISSANCE AVAILABILITY

a. Aircraft

Aircraft weather reconnaissance for the JTWC is performed by the 54th Weather Reconnaissance Squadron (54th WRS) located at Andersen Air Force Base, Guam. The 54th WRS only averaged three to four storm-capable aircraft (six assigned) throughout the entire year. On April 8th, five of the 54th WRS's six WC-130 aircraft were grounded for cracked wings (the sixth was previously grounded for major maintenance repairs). This left the unit with no storm-capable aircraft for a short period of time until replacements began arriving from the 53rd WRS, Keesler Air Force Base, Mississippi. During the period 1 August - 5 October, two 53rd WRS WC-130 aircraft and crews were in place to augment 54th WRS resources. But during this period, Joint Chiefs of Staff tasking took away two WC-130 aircraft from the 54th WRS, resulting in no net aircraft augmentation for the season. The JTWC aircraft reconnaissance requirements are provided daily to the Reconnaissance Coordinator (TCARC). The TCARC then marries the tasking from JTWC with the available airframes from the 54th WRS.

As in previous years, aircraft reconnaissance provides direct measurements of standard pressure-level height, temperature, flight-level winds, sea-level pressure, estimated surface winds (when observable), and numerous additional parameters. The meteorological data are gathered by the Aerial Reconnaissance Weather Officer (ARWO) and dropsonde operators of Detachment 3, 1st Weather Wing who fly with the 54th WRS. These data provide the Typhoon Duty Officer (TDO) with indications of tropical cyclone position and intensity. Another important aspect is the availability of the data for technique development and tropical cyclone research.

b. Satellite

Satellite fixes from USAF/USN ground sites and USN ships provide day and night coverage in JTWC's area of responsibility. Interpretation of this satellite imagery provides tropical cyclone positions and estimates of current and forecast intensities through the Dvorak technique.

c. Radar

Land-based radar provides positioning data on well-developed tropical cyclones when in the proximity (usually within 175 nm (324 km)) of the radar sites in the Philippines, Taiwan, Hong Kong, Japan, South Korea, Kwajalein, and Guam.

d. Synoptic

JTWC also determines tropical cyclone positions based on the analysis of the surface/gradient-level synoptic data. These positions were helpful in situations where the vertical structure of the tropical cyclone was weak or accurate surface positions from aircraft or satellite were not available.

3. AIRCRAFT RECONNAISSANCE SUMMARY

During 1986, JTWC levied requirements for 250 vortex fixes and 73 investigative missions of which 9 were flown into disturbances that did not develop. In addition to the levied fixes, 206 intermediate fixes were also obtained. Thirty-six synoptic missions were requested and flown to provide mid-level steering information. The average distance error for all aircraft fixes received at JTWC during 1986 was 13 nm (24 km).

effectiveness Aircraft reconnaissance summarized in Table 2-1. The manner in which the aerial reconnaissance mission is graded changed during 1986. A new Mission Effectiveness Grading (MEG) system was tested operationally. No longer is the early, late or on-time criteria being used. The new system graded the performance of the mission as satisfactory, degraded but satisfactory, unsatisfactory or missed. A mission could be degraded if certain critical weather parameters were not obtained such as temperature, dew point, minimum sea-level pressure, flight-level height in meters, etc. Also if too much time or too little time elapsed between the primary and intermediate fixes, the mission could be degraded and yet be satisfactory.

TABLE 2-1.	AIRCRAPT REC	CONTAISSANCE EPPECT	TIVERSS	
MISSIONS	TA SKED	COMPLETED	H1335D	PERCENT
FIXES	250	240	10	96.0\$
LUVESTS	73	70	3	95.98
STWOPTIC TRACES	36	30	6	83.35
	NISSION BYF	ECTIVERESS GRADING		
1			TOTAL	PERCENT
FIX MISSIONS TASKED			250	
SATISFACTORY			210	84.0\$
DEGRADED (BUT SATISFAC	TORY)		57	22.85
UNSATISPACTORY			10	16.0\$
	LEVIED VS. I	ISSED FIXES		
	LEVIED	MISSED	PERCENT	
AVERAGE 1965-1970	507	10	2.05	
1971	802	61	2.05	
1972	624	126	20.25	
1973	227	13	5.78	
1974	358	30	8.45	
1975 1976	21 <i>7</i> 317	7	3.25	
1977	203	3	3.58 1.58	
1978	290	2	0.75	
1979	289	18	9.85	
1980	213	',	1.95	
1981	201	3	1,5\$	
1982	276	17	6.21	
1983	157	3	1,95	
1984	210	į	1.05	
1985	210	19	6.75	
1986	250	10	4.05	
• CORRECTED DATA POR	985.			

4. SATELLITE RECONNAISSANCE SUMMARY

The Air Force provides satellite reconnaissance support to JTWC through a tropical cyclone satellite surveillance network consisting of both tactical and centralized facilities. Tactical DMSP sites monitoring DMSP, NOAA and geostationary satellite data are located at Nimitz Hill, Guam; Clark AB, Republic of the Philippines; Kadena AB, Okinawa, Japan; Osan AB, Republic of Korea; and Hickam AFB, Hawaii. These sites provide a combined coverage that includes most of JTWC's area of responsibility in the western North Pacific from near the dateline westward to the Malay Peninsula. For the remainder of its AOR, JTWC relies on the Air Force Global Weather Central (AFGWC) to provide coverage using stored Satellite data. The Naval Oceanography Command Detachment, Diego Garcia, provides NOAA polar orbiting coverage in the central Indian Ocean as a supplement to this support. U.S. Navy ships equipped for direct readout also provide supplementary support.

AFGWC, located at Offutt AFB, Nebraska, is the centralized member of the tropical cyclone satellite surveillance network. In support of JTWC, AFGWC processes stored imagery from DMSP and NOAA spacecraft. Imagery recorded onboard the spacecraft as they pass over the earth is later downlinked to AFGWC via a network of command readout sites and communication satellites. This enables AFGWC to obtain the coverage necessary to fix all tropical systems of interest to JTWC. AFGWC has the primary responsibility to provide tropical cyclone surveillance over the entire Indian Ocean, southwest Pacific, and the area near the dateline. Additionally, AFGWC can be tasked to provide tropical cyclone positions in the entire western North Pacific as backup to coverage routinely available in that region.

The hub of the network is Detachment 1, First Weather Wing (Det 1, 1WW), colocated with JTWC on Nimitz Hill, Guam. Based on available satellite coverage, Det 1, 1WW is responsible for coordinating satellite reconnaissance requirements with JTWC and tasking the individual network sites for the necessary tropical cyclone fixes and intensity

estimates. When a particular fix is important to the development of JTWC's next tropical cyclone warning, two sites are tasked to fix the tropical cyclone from the same satellite pass. This "dual-site" concept provides the necessary redundancy to virtually guarantee JTWC an accurate satellite fix on the tropical cyclone.

The network provides JTWC with several products and services. The main service is one of monitoring its AOR for indications of tropical cyclone development. If an area exhibits the potential for development, JTWC is notified. Once JTWC issues either a Tropical Cyclone Formation Alert or warning, the network is tasked to provide three products: tropical cyclone positions, intensity estimates and forecast intensities. Each satellite tropical cyclone position is assigned a Position Code Number (PCN) to indicate the accuracy of the fix position. This is determined by the availability of visible landmarks in the image for precise gridding, and the degree of organization of the tropical cyclone's cloud system (Table 2-2).

TABLE 2-2.	POSITION CODE NUMBERS
PCN	METHOD OF CENTER DETERMINATION/GRIDDING
1 2	EYE/GEOGRAPHY EYE/EPHEMERIS
3	WELL-DEFINED CIRCULATION CENTER/GEOGRAPHY WELL-DEFINED CIRCULATION CENTER/EPHEMERIS
5 6	POORLY DEFINED CIRCULATION CENTER/GEOGRAPHY POORLY DEFINED CIRCULATION CENTER/EPHEMERIS

During 1986, the network provided JTWC with a total of 2693 satellite fixes on tropical systems in the western North Pacific. This is a record number of fixes for the year. Another 57 fixes were made for tropical systems in the North Indian Ocean. A comparison of those fixes of numbered tropical cyclones in the western North Pacific with their corresponding JTWC best track positions is shown in Table 2-3a (Comparison of fixes with the corresponding best track for the South Pacific and Indian Oceans are presented in Table 2-3b).

TABLE 2-3	A .	CY	CLONE PO	TION (NM) OF SITIONS FROM TERN NORTH PA NUMBER OF CAS	THE JTWC BE	ST TRACK ORTH INDIA	POSITIONS	
	١	JESTERN NOR	TH PACIF	IC OCEAN	N	ORTH INDI	AN OCEAN	
	1976	-1985 AVERA	GE 19	86	1980-1	985 AVERA	GE 1986	
PCN	(ALL	SITES)	(ALL	SITES)	(ALL	SITES)	(ALL SI	TES)
1	13.6	(1632)	17.7	(188)	16.7	(40)		(0)
2 3 4	16.6	(1792)	16.0	(450)	18.9	(7)		(0)
3	20.9	(2367)	26.6	(204)	17.6	(21)	161.6	(1)
4	22.9	(1300)	29.4	(398)	58.3	(10)		(0)
5 6	37.4	(4381)	45.1	(322)	33.5	(220)	87.4	(12)
6	39.5	(3250)	40.8	(1125)	37.5	(203)	106.1	(22)
1&2	15.2	(3424)	16.5	(638)	17.2	(47)		(0)
3&4	21.6	(3667)	28.5	(602)	33.0	(31)	161.6	(1)
546	38.3	(7631)	41.8	(1447)	34.7	(423)	99.5	(34)
TOTALS		(14722)		(2687)		(501)		(35)

TABLE 2-3B.	TROPICAL CYCLOME POS PACIFIC AND SOUT	P ALL SATELLITE DERIVED SITIOMS IN THE SOUTH TH INDIAN OCEANS. IN PARENTHESES.
	1	986
PCN	(ALL	. SITES)
1	18.3	(48)
2	15.6	(144)
2 3 4 5	39.5	(55)
•	23.9	(111)
5	46.7	(158)
•	36.1	(1012)
182	16.3	(192)
344	29.1	(166)
546	37.5	(1170)
TOTALS		(1528)

Estimates of the tropical cyclone's current intensity and 24-hour intensity forecast are made every 12 hours by applying the Dvorak technique (NOAA Technical Report NESDIS 11) to visual and enhanced infrared imagery (Figure 2-1 and Table 2-4).

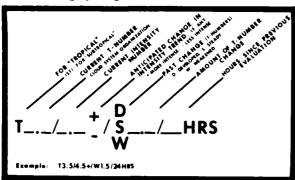


Figure 2-1. Dvorak code for communicating estimates of current and forecast intensity derived from satellite data. In the example, the current T-number is 3.5, but the current intensity estimate is 4.5 (equivalent to 77 kt (40 m/sec)). The cloud system has weakened by 1.5 T-numbers since the previous evaluation conducted 24 hours earlier. The plus (+) symbol indicates an expected reversal of the weakening trend or very little further weakening of the tropical cyclone during the next 24-hour period.

Figure 2-2 shows the status of operational polar orbiting spacecraft. Four were available, on the average, throughout the year. The two DMSP satellites, 17540 (P6) and 18541 (P7), operated reliably through the year with only occasional minor imagery loss due to seasonal repositioning of a glare obstructor (GLOB) on the P6 spacecraft. NOAA spacecraft did not fare as well. On January 1st,

FIGURE 2-2.	POLAN CRBITTERS 1986
	JAM PED MAR APR MAY JUN JUL AND SEP OCT NOV DIC
MOAA 6 (0651 LBT) D	17
MOAA - 9 (1931 LST) A	
MORA 10 (0730 LST) D	17
DMSP P6 (0612 LST) &	
2008P P7 (1010 LST) A	
	OPERATIONAL
	LET : LOCAL SUB TIME A : ASCENDER

NDAA 6 was returned to service from standby mode to replace an ailing NDAA 8. Only partially operational, NDAA 6 served as the primary morning spacecraft for most of 1986. Its most serious limitation (for Det 1, 100 services from standard morning spacecraft for most of 1986.

appearance of "railroad track-like" lines through the center of its High Resolution Picture Transmissions (HRPT) imagery. But by 17 November, it had again been placed on standby (with HRPT and Automatic Picture Transmission (APT) turned off), and was replaced by the newly-launched NOAA 10. NOAA 10 and NOAA 9 have had no major problems providing high-quality imagery through the remainder of the year.

5. RADAR RECONNAISSANCE SUMMARY

Eighteen of the 27 significant tropical cyclones in the western North Pacific during 1986 passed within range of land-based radar with sufficient cloud pattern organization to be fixed. The land-based radar fixes that were obtained and transmitted to JTWC totaled 899. Only one radar fix was obtained by reconnaissance aircraft.

The WMO radar code defines three categories of accuracy: good (within 10 km (5 nm)), fair (within 10-30 km (5-16 nm)), and poor (within 30-50 km (16-27 nm)). Of the 900 radar fixes coded in this manner; 243 were good, 257 were fair, and 400 were poor. Compared to JTWC's best track, the mean vector deviation for land-based radar sites was 16 nm (29 km). Excellent support through timely and accurate radar fix positioning allowed JTWC to track and forecast tropical cyclone movement through even the most difficult erratic tracks.

As in previous years, no radar reports were received on North Indian Ocean tropical cyclones.

6. TROPICAL CYCLONE FIX DATA

A total of 3868 fixes on 27 western North Pacific tropical cyclones and 59 fixes on 3 North Indian Ocean tropical cyclones were received at JTWC. Table 2-5A, Fix Platform Summary, delineates the number of fixes per platform for each individual tropical cyclone. Season totals and percentages are also indicated. (Table 2-5B provides the same information for the South Pacific and South Indian Oceans.)

AS A F (CURRE Number	MAXIMUM SUSTAINED WIND SPEED (KT) AS A FUNCTION OF DVORAK CI & FI (CURRENT AND FORECAST INTENSITY) NUMBER AND MINIMUM SEA-LEVEL PRESSURE (MSLP)						
TROPICAL CYCLONE	WIND	MSLP					
INTENSITY NUMBER	SPEED						
		,					
0.0	<25						
0.5	25						
1.0	25						
1.5	25						
2.0	30	1000					
2.5	35	997					
3.0	45	991					
3.5	55	984					
4.0	65	976					
4.5	77	966					
5.0	90	953					
5.5	102	941					
6.0	115	927					
6.5	127	914					
7.0	1 40	898					
7.5	155	879					
8.0	170	858					

TABLE 2-5A.		FIX PLATFOR	SUPPLARY FOR	1986			
VESTERN NORTH	ACIFIC	AIRCRAFT	SATELLITE	RADAR	SY	MOPTIC	TOTAL
ימעע זין	(01W)	9	84	0		0	93
TY KEN	(02W)	8	97	0		0	105
STY LOLA	(03W)	10	92	0		0	102
TS MAC	(0#H)	4	104	27		0	135
TY HANCY	(05W)		60	26		0	90
TS ONED	(06W)	8	49	0		0	57
STY PEOGY	(07W)	16	179	40		0	235
TY ROCKE	(08W)	10	98	82		0	190
TS SARAH	(09W)	8	112	2		0	122
TY GEORGETTE	(11E)	9	93	0		0	102
TY TIP	(10W)	10	91	0		0	101
TY VERA	(11W)	20	190	70		0	280
TY WAYNE	(12W)	18	257	374		3	652
TY ABBY	(13W)	10	93	79		1	183
TY BEN	(14W)	21	147	0		0	168
IY CARMEN	(15W)	11	99	7		0	117
TS DOM	(16W)	1	56	13		0	70
TY ELLEN	(17W)	8	174	74		0	256
TY PORREST	(18¥)	8	91	0		0	99
TS GEORGIA	(19W)	4	76	5		0	85
TS HERBERT	(20W)	4	90	1		0	95
TS IDA	(21W)	6	90	10		1	107
TY JOE	(22W)	13	153	64		0	230
STY KIM	(23W)	23	263	21		0	307
TS LEX	(24W)	2	48	0		0	50
TY MARGE	(25V)	. 9	144	6		0	159
TY MORRIS	(26W)	16	149	29		0	194
TOTALS		270	3179	930		5	4384
S OF TOTAL MR OF FIXES		6.2\$	72.5\$	21.25	1	0.15	100.0\$
NORTH INDIAN O	CBAN	SATI	BLLITE	SYMOPTIC	TOTAL		
TC 01B			25	2	27		
TC 02B			15	ŏ	15		
TC 03A			17	ŏ	17		
TOTALS			57	2	59		
S OF TOTAL MR OF FIXES		96	5.6\$	3.4\$	100.0\$		

Secretary Secretary Statement

SECTION OF SECTION ASSESSED SECTION SE

TABLE 2-5B.	FIX PLATFORM S	SUPPLARY FOR 19	86	
THE SOUTH PACIFIC AND SOUTH INDIAN OCEANS	SATELLITE	RADAR	SYNOPTIC	TOTAL
TC 01S		0	0	54
TC OSS MICHOLAS	156	Ó	Ó	156
TC 03P	48	0	0	48
TC 04S DELIFININA	54 156 48 58	0	1	59
TC 058 COSTA	57	0	5	62
TC 06S	16	0	0	16
TC 07S OPHELIA	46	0	0	46
TC 06S	36	0	O_	36
TC 098 HECTOR	60	0	2	62
TC 10S PANCHO	21	0	0	21
TC 11P VERNON	42	0	0	42
TC 12P WINIFRED	58	0	0	58
TC 13S ERINESTA	74	0	0	74
TC 148 FILOMENA	40	0	0	40 14
TC 15P IMA	14	0	Ö	8
TC 16P JUNE TC 17P KELI	8 48	0	0	48
		Ö	ŏ	17
TC 183 RHONDA TC 195 GISTA	17 42	0	0	42
TC 20S SELWYN	43	ŏ	ŏ	43
TC 218 TIPPANY	*3 32	ŏ	ŏ	32
TC 22S VICTOR	90	3	ŏ	93
TC 23P LUSI	81	0	3	84
TC 24P ALFRED	54	ŏ	ŏ	54
TC 25S HOMORININA	75	ŏ	ŏ	75
TC 26S IARIMA	19	ŏ	ŏ	ij
TC 27S JEPOTRA	56	ŏ	ŏ	56
TC 28S KRISOSTOMA"	73	Ŏ	i	74
TC 29P MARTIN	43	Ŏ	Ó	43
TC 30P	33	0	0	33
TC 31P MANU	52	0	0	52
TC 32S BILLY	91	O	0	91
TC 33P WAMU	82	0	0	82
TOTALS	1719	3	12	1734
\$ OF TOTAL				
MR OF FIXES	99.1\$	0.25	0.75	100.05
^ TC 28S (KRISOSTOMA) WA # TC 32S (BILLY) WAS ALS		ISON.		

CHAPTER III - SUMMARY OF WESTERN NORTH PACIFIC AND NORTH INDIAN OCEAN TROPICAL CYCLONES

1. GENERAL

During 1986, JTWC issued warnings for twenty-seven tropical cyclones in the western North Pacific. This included three super typhoons, sixteen typhoons, eight tropical storms and no tropical depressions. This also included one typhoon, Georgette (11E), which initially developed in the eastern North Pacific. For the second year in a row the total number of western North Pacific tropical cyclones was four lower than the climatological mean of thirty-one. The total for the North Indian Ocean was three tropical cyclones (of tropical storm intensity), which is also less than the climatological mean of 4.5 and three less than the preceding year. In summary, warnings were issued on a total of thirty tropical cyclones in the northern hemisphere.

In WESTPAC there were 163 "warning days". (A "warning day" is defined as a day during which JTWC was issuing warnings on at least one tropical cyclone. A "two-cyclone" day refers to a day when two different tropical cyclones were warned on simultaneously, a "three-cyclone" day - three tropical cyclones at one time, and so on...). In WESTPAC, there were thirty-two two-cyclone days, four three-cyclone days and no four- or five-cyclone days. When North Indian Ocean tropical cyclones are included, there were 168 warning days, thirty-two two-cyclone days, seven three-cyclone days and no four- or five-cyclone days.

JTWC issued 743 warnings on the twenty-seven western North Pacific tropical cyclones and twenty-nine warnings on the three North Indian Ocean tropical cyclones, for a total of 772 northern hemisphere warnings. There were thirty-eight initial Tropical Cyclone Formation Alerts (TCFAs) issued for the western North Pacific and seven for the North Indian Ocean, for a total of forty-five. All WESTPAC and North Indian Ocean tropical cyclones (100 percent) developed after the issuance of a TCFA. For the western North Pacific, the false alarm rate was twenty-six percent (a ten percent improvement over last year) and the mean lead time (to issuance of first warning) was twenty-five hours. For the North Indian Ocean, the false alarm rate was 57.0 percent; the mean lead time was 5.7 hours.

2. WESTERN NORTH PACIFIC TROPICAL CYCLONES

Several factors made 1986 an unusual, and therefore difficult, tropical cyclone season for JTWC. There were only four classic "straight runners" (which normally have the lowest forecast errors) in 1986, as compared to the seven of 1985. The number of "recurvers" was the same, but there were three more tropical cyclones in the "other" category in 1986 than in 1985. "Other" tropical cyclones are those whose tracks do not easily fit into the straight runner or recurver categories, i.e., the erratic systems. The tropical cyclones in this last category were the most difficult to forecast. The major forecast problems arose with those tropical cyclones that formed in the active monsoon trough and during the extremely active winter period. For discussion purposes the tropical cyclone year is divided into three periods.

JANUARY THROUGH AUGUST

The season began in late January with Typhoon Judy (01W), a "classic" recurving system which passed between Guam and the Philippine Islands. Although JTWC did a good job forecasting the track, difficulties with the speed of movement caused forecast errors to be larger than average. Typhoon Ken (02W) was a short-lived tropical cyclone which formed southwest of Guam and dissipated over water. Super Typhoon Lola (03W) developed very slowly in the vicinity of Pohnpei in the Caroline Islands. The enhanced southwest monsoon flow associated with Lola's formation was significant, as indicated by damaging 60 kt 31 (m/sec) winds which were reported on Pohnpei. At the same time, and of particular meteorological interest, was the development of a "twin" tropical cyclone, Namu (33P), in the western South Pacific. This situation occurs periodically in the Western Pacific and Indian Oceans when strong low-latitude westerlies enhance the development of tropical cyclones in both hemispheres. This is usually observed during the spring and fall transition periods. Tropical Cyclone Namu (33P), incidentally, was the most intense tropical cyclone to strike the Solomon Islands this century. Tropical Storm Mac (04W) developed near the island of Hainan in the South China Sea and passed between Luzon and Taiwan at the end of May. As a monsoon depression, it struggled against strong vertical wind shear most of its life. Typhoon Nancy (05W) developed in June in the central Philippine Sea, struck the east coast Taiwan and recurved into the Korea Strait. JTWC forecast Nancy's recurvature track quite well until near the end, when it began to accelerate toward the northeast and central convection sheared away. Tropical Storm Owen (06W) was another relatively weak system which had difficulty developing due to strong vertical shear. The second super typhoon of the year, Peggy (07W), developed east of Guam and followed a west-northwest track into northern Luzon, where 93 deaths resulted. It continued onward until it made a second landfall on the China coast northeast of Hong Kong. Typhoon Roger (08W) was another one of the several early season recurving tropical cyclones. The recurvature near the island of Okinawa was accurately forecast 48-hours in advance. Tropical Storm Sarah (09W) was the first of a series of tropical cyclones which caused serious forecast problems for JTWC. Sarah (09W) developed in an active monsoon trough east of Luzon and appeared, from satellite imagery, to track west-northwestward across Luzon into the South China Sea. Post-analysis of aircraft reconnaissance data, however, indicated that the low-level center never made landfall on Luzon, but recurved northeastward instead. Typhoon Tip (10W) and Typhoon Georgette (11E) engaged in a classic binary interaction (Fujiwhara, 1921 and 1923; Brand, 1970; Dong and Neumann, 1983) northeast of Quam which resulted in larger than average forecast errors for both systems. Typhoon Georgette (11E), incidentally had one of the longest tracks on record. It initially developed in the eastern North Pacific, dissipated as a significant tropical cyclone in the central North Pacific, and then regenerated from the pre-existing disturbance in the western North Pacific. Typhoon Vera (11W) caused more forecast problems than any tropical cyclone in 1986. It generated in the active monsoon trough as a "classic" monsoon depression - difficult to position and forecast. Typhoon Wayne (12W) was probably the most interesting tropical cyclone in 1986. During its

exceptionally long life (twenty days), it struck Luzon (once) and Taiwan (twice), threatened Hong Kong (twice), dissipated and reformed (once), before finally dissipating over North Vietnam near Hanoi. Many multiple-storm days occurred during the later part of this first period. As a result, reconnaissance (both satellite and aircraft) assets were working overtime to keep up with the requirements for the latest data.

SEPTEMBER THROUGH OCTOBER

The tropics quieted down somewhat during this second period. Typhoon Abby (13W) developed just to the southeast of Guam and moved northwestward before recurving near Taiwan. Typhoon Ben (14W) developed rapidly southeast of Guam and drifted northward before recurving through a break in the subtropical ridge. Typhoon Carmen (15W) was the third tropical cyclone in a row to develop southeast of Guam. It followed a recurvature track, passing north of Guam and east of Japan. The forecast statistics for Carmen (15W) were excellent.

During the rest of October and into early November, the major tropical cyclone generation area shifted, for the most part, from southeast of Guam to the Philippine Islands. Although Tropical Storm Dom (16W) did not become a "significant" tropical cyclone until it was approaching the coast of Vietnam, the Republic of the Philippines suffered extensive flooding when Dom (16W), at tropical depression intensity, passed by. Typhoon Ellen (17W) intensified east of the central Philippine Islands and passed about 90 nm (167 km) south of Subic Bay. Initially, it appeared that recurvature toward Taiwan would take place, but a surge in the low-level northeasterlies from the China mainland resulted in a more westerly track towards the island of Hainan. Further to the east, Typhoon Forrest (18W), which attained 100 kt (185 m/sec) intensity, developed northeast of Guam and recurved. Tropical Storm Georgia (19W) spawned just east of the central Philippine Islands, passed south of Subic Bay and made landfall over Vietnam after following a nearly straight track.

NOVEMBER AND DECEMBER

The combined months of November and December 1986 proved to be one of the most active winters in WESTPAC history with seven tropical cyclones (compared to an average of four). The three typhoons in December is an all-time record. Tropical Storm Herbert (20W) developed in the wake of Tropical Storm Georgia (19W) and followed an almost identical track

westward across the South China Sea with landfall on the coast of central Vietnam. Tropical Storm Ida (21W) was hindered by the frictional effects during its passage through the central Philippine Islands and strong vertical wind shear over the South China Sea. Typhoon Joe (22W) formed east of Luzon and recurved to the northeast without making landfall. Its associated convective bands, however, produced significant rainfall over the northern Luzon. The tropical cyclone activity then shifted eastward. Super Typnoon Kim (23W) was the first in a series of four difficult late season tropical cyclones. formed to the southeast of Guam and initially followed a northwestward track. Although Kim (23W) appeared to change to a recurvature track before reaching Guam, it abruptly turned toward the west and passed 15 nm (28 km) north of the island of Saipan in the Marianas at near super typhoon intensity, causing extensive damage. Tropical Storm Lex (24W) developed in the wake of Kim (23W) but was unable to mature due to the strong upper-level shear caused by the intense outflow from Kim (23W). Typhoon Marge (25W) also developed southeast of Guam, but very slowly. It turned westward, passed south of Guam, then crossed the central Philippine Islands and dissipated in the South China Sea. Typhoon Norris (26W) continued the late season trend by developing to the southeast of It oscillated about a westward track and crossed the central Philippine Islands before dissipating over the South China Sea.

The last three typhoons of the year - Kim (23W). Marge (25W) and Norris (26W) were similar in that they followed a "step-like" track. It appeared that the basic steering flow south of the subtropical ridge axis changed the tracks from a westward to more northwestward, as mid-latitude troughs moved off China. Once these troughs had passed to the north, the tracks reverted back to westward. mid-latitude troughs never penetrated far enough to the south to break through the subtropical ridge and allow the tropical cyclones to recurve. Later, as the tropical cyclones approached the Philippine Islands, southwestward movement was observed due to surges in the northeast monsoon, which had fully established itself across the Philippine Islands and South China Sea. During wintertime synoptic regimes, forecast difficulties were also compounded by the instability of the One-Way Interactive Tropical Cyclone Model (OTCM), JTWC's primary dynamic forecast aid, due to kinetic energy conversion problems.

Tables 3-1 through 3-6 provide information on the monthly and annual distribution of tropical cyclones, warnings and tropical cyclone formation alerts.

	CYCLOME	PER 100 OF	VARB ING	CALENDAN DAYS OF WARNING	MUMBER OF WARNINGS 1 SSUED	MAXIMUM SURFACE WINDS-ET (H/S)	MSLP -
	JUDT	01 FEB -		5	21	85 (94)	974
	CO	26 APR -		5	18	90 (46)	980
	LOLA	IT MAT -		,	26	150 (77)	910
04W TS		26 MAY -			15	45 (23)	992
	HANCY	21 JUB -			15	80 (41) 50 (26)	955
	PROCT	28 JUN - 03 JUL -		-	35	140 (72)	967
	ROGER	13 JUL -		,	19	85 (99)	900
	SARAH	10 JUL -			22	55 (28)	186
	GRORGETTE			ï	26	65 (33)	97.3
	TIP	13 AUG -		,	25	80 (41)	965
	VERA AL	15 AUG -		1	,	40 (21)	995
118 77	VERA #2	17 AUG -	29 AUG	13	48	110 (57)	923
	MATHE	18 AUG -	25 AUG	8	29	85 (44)	954
17 WS		28 AUG -		10	38	90 (46)	951
13W TY		13 SEP -			36	95 (44)	943
146 11		19 SEP -		12	46	120 (62)	917
	CANONIN	02 OCT -		7	27	100 (51)	939
	200	09 OCT -		1	11	45 (23)	990
178 11	PORREST	11 OCT - 15 OCT -		•	33 19	80 (41) 110 (57)	970
199 TS		15 OCT -		•	15	55 (28)	932 95 t
	HERMAN T	08 909			16	60 (31)	184
21 H TS		10 807		·	22	55 (28)	986
229 77		18 801		Ţ	24	100 (51)	940
23W STT		28 BOY		13	52	190 (72)	905
244 13		01 DEC -		,	ĩ	40 (21)	994
25W TT	PARCE	14 DEC -		10	38	95 (49)	947
260 TY	MORR LS	21 DBC -	DI JAB	11	43	90 (96)	951
		1986 T	77 MLB	163 **	741 ***		

Г	TABLE	3-2												
				STERN										
Ì	Year	JAN	FEB	HAR	APR	MAY	JUN	JUL 	AUG	SEP	OCT	NOV	DEC	TOTALS
	1959	000	010	010	100	000	001	111	8 512	9 423	210	200	2 200	17 7 7
l	1960	1 001	000	001	100	010	210	3 210	9 810	041	400	100	100	30 19 8 3
ł	1961	1 010	010	100	010	211	114	5 320	7 313	510	7 322	101	100	20 11 11
	1962	000	010	000	100	3 201	000	8 51 2	8 701	7 31 3	5 31 1	30 1	050 5	39 24 6 9
1	1963	000	000	001	100	000	310	5 311	301	220	6 510	000	3 210	28 19 6 3
l	1964	000	000	000	000	3 201	200 200	8 61 1	8 350	8 521	7 331	6 420	2 101	26 13 5
I	1965	2 110	2 020	1 010	100	2 101	310	6 411	7 322	9 531	3 201	2 110	1 010	40 21 13 6
	1966	000	000	000	100	2 200	100	310	9 531	10 532	112	5 122	2 101	38 20 10 8
	1967	1 010	000	2 110	100	01 O	100	8 332	10 343	8 530	4 211	400	1 01 0	41 20 15 6
ĺ	1968	000	001	000	1 100	000	202	3 120	8 341	400	6 51 0	400	0 000	20 7 4
l	1969	1 100	000	010	1 100	000	000	3 210	3 210	6 204	5 410	2 110	010	23 13 6 4
l	1970	000	1 100	0 000	000	000 0	2 110	3 021	7 421	220	6 321	130	000	27 12 12 3
l	1971	010	000	1 010	500 5	5 230	2 200	8 620	5 311	7 51 1	310	2 110	000	37 24 11 2
l	1972	100	000	1 001	000	000	250	5 410	5 320	6 41 1	5 410	2 200	3 210	32 22 8 2
	1973	000	000	000	000	000	000	7 430	6 231	3 201	100	3 030	000	23 12 9 2
l	1974	1 010	000	1 01 0	1 01 0	100	121	5 230	7 232	5 320	400	220	050 5	35 15 17 3
l	1975	100	000	000	001	000	0 000	010	6 411	5 410	6 321	3 210	002 5	25 14 6 5
l	1976	1 100	1 01 0	000	2 110	500 5	200 2	4 220	130	5 410	000	2 110	020 020	25 14 11 0
l	1977	000	000	1 01 0	000	1 001	1 01 0	30 1	020 5	5 230	4 310	200 2	1 100	21 11 8 2
	1978	1 010	000	0 000	100	000	030	3 10	8 341	4 310	7 412	121	0 000	32 15 13 4
l	1979	1 100	0 000	1 100	1 100	2 011	0 000	5 221	202	6 3 30	3 210	2 110	3 111	28 14 9 5
	1980	000	000	1 001	1 010	220	1 010	5 311	3 201	7 51 1	220	1 100	1 010	28 15 9 4
l	1981	0 000	000	1 100	1 010	1 010	2 200	5 230	8 251	400	2 110	3 210	2 200	29 16 12 1
Ì	1982	000	000	3 210	000	1 100	3 1 20	220	5 500	6 321	3 01	1 100	1 100	28 19 7 2
ł	1983	000	000	000	000	000	1 010	3 300	6 231	3 111	5 320	5 320	2 020	25 12 11 2
	1984	000	000	000	000	000	2 020	5 410	7 232	1 30	8 521	3 300	1 100	30 16 11 3
	1985	050 5	000	000	000	1 100	3 201	1 100	7 520	5 320	5 410	1 010	2 110	27 17 9 1
ľ	1986	000	1 100	000	100	2 110	2 110	2 2 0 0	5 410	2 200	5 320	220 220	3 210	27 19 8 0
	(1959-	1986)	0.3	0.6	0.8	1.3	2.1	4.6	6.3	5.6	4.6	2.8	1,5	30.9
	CASES	15	9	18	21	36	58	128		157	1 30	78	41	866
ı		Le	gend:	Tot	al fo	r the	mont	h			- 60			
ı				Typ	hoons pical	Stor				<u>0</u>	ព្រ	9		
	separa 1. of a p than t 2.	ishin te mo If artic wo da If it w	g a s nths. a tro ular ys, t a tro	compi tanda The spical month hen t spical tribu	lationd for crit cycl and hat a cycl ted t	erion one w conti ystem one w one w	1959 time used as fi nued was was was	throus whe Foll rst wo over attri	n a tows: arned into buted on pr th -	on duthe notes to the total tota	al cy luring lext m he se o the	the lonth cond last how l	last for l month two long t	ted in two two days onger
	on the	firs firs	t day t son h and	of t th. Lont	he ne Howev Inued	er, i linto	nth, fat the	that ropic	tropi al cy	cal c	yelon bega	Me was	the i	ibuted ast day then it

\$255565 \$2555555

Consisted the second t

TABLE 3-3

WESTERN NORTH PACIFIC SUMMARY

TYPHOONS

(1945-1958)

AVG 0.4 0.1 0.3 0.4 0.7 1.1 2.0 2.9 3.2 2.4 2.0 0.9 16.3 CASES 5 1 4 5 10 15 28 41 45 34 28 12 228 (1959-1986)

AVG 0.2 0.1 0.2 0.5 0.7 1.0 2.7 3.3 3.3 3.0 1.7 0.7 17.4 CASES 6 2 6 15 19 29 75 91 91 85 47 19 486

TROPICAL STORMS AND TYPHOONS

(1945-1958)

AVG 0.4 0.1 0.4 0.5 0.8 1.6 3.0 3.9 4.1 3.3 2.8 1.1 22.0 CASES 6 1 6 7 11 22 42 54 58 46 39 16 308 (1959-1986)

AVG 0.5 0.3 0.5 0.7 1.1 1.8 4.1 5.3 4.9 4.1 2.6 1.3 27.1 CASES 14 8 14 20 30 49 116 147 136 116 73 36 759 (1986)

FORMATION ALERTS: 27 of 38 Formation Alerts developed into significant tropical cyclones. Tropical Cyclone Formation Alerts were issued for all of the significant tropical cyclones that developed in 1986.

WARNINGS:


Number of calendar warning days: 163


Number of calendar warning days


with two tropical cyclones: 32


Number of calendar warning days with three tropical cyclones:

TABLE 3-4.	FORMATION ALERT SUMMARY WESTERN WORTH PACIFIC							
YEAR	NUMBER OF ALERT SYSTEMS	ALENT SYSTEMS WHICH BECAME MUMBERED TROPICAL CYCLORES	TOTAL NUMBERED TROPICAL CYCLONES	FALSE ALARM RATE				
1975	34	25	25	26\$				
1976	34	25	25	26\$				
1977	26	20	21	235				
1978	32	27	32	16\$				
1979	27	23	28	15\$				
1980	37	28	28	245				
1981	29	28	29	3\$				
1982	36	26	28	285				
1983	31	25	25	195				
1984	37	30	30	195				
1985	39	26	27	33\$				
1986	38	27	21	291				
1975~1986) AVERAGE	33.3	25.8	27.1	21 . 9\$				
CASES	400	310	325					

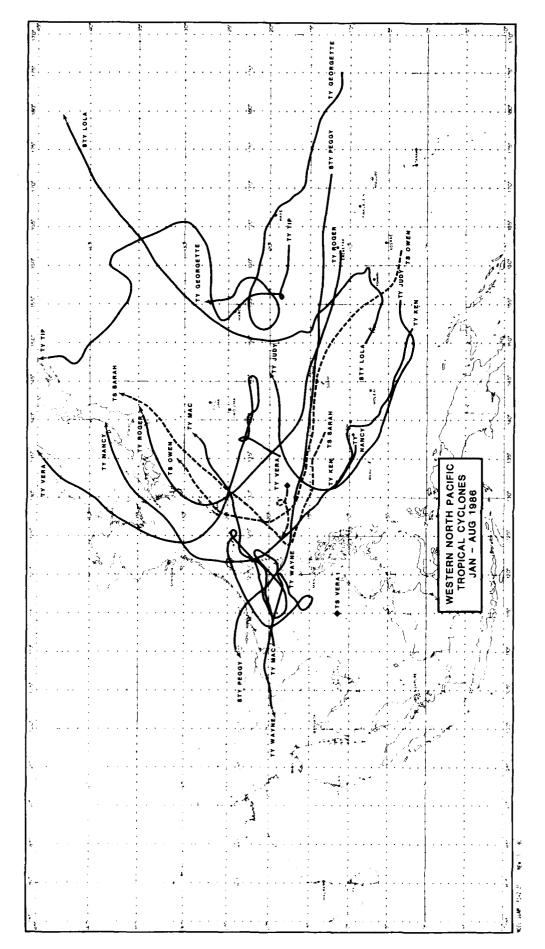

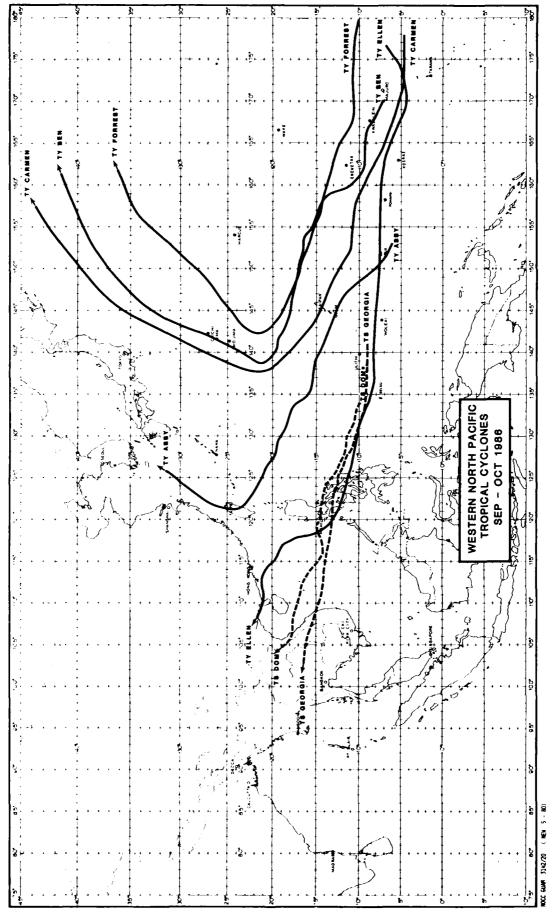

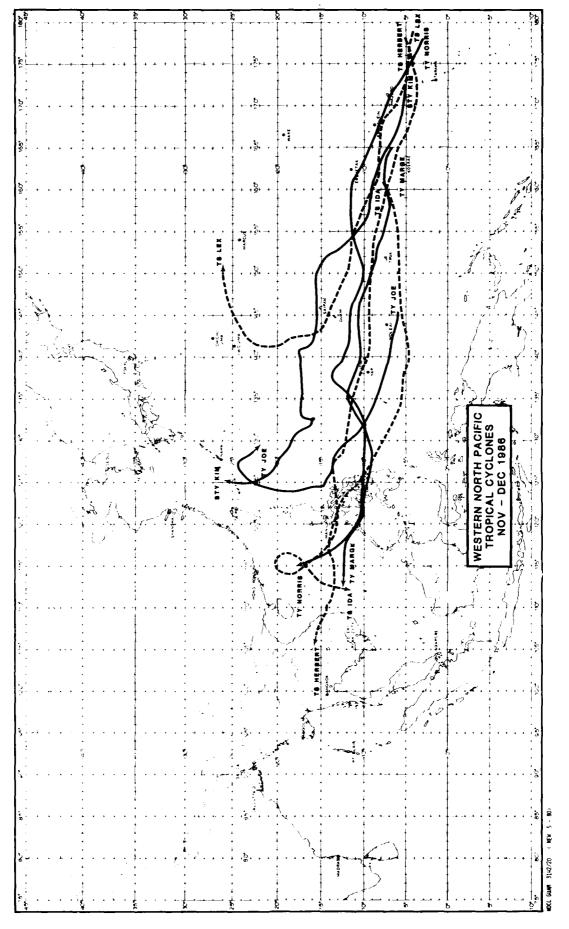

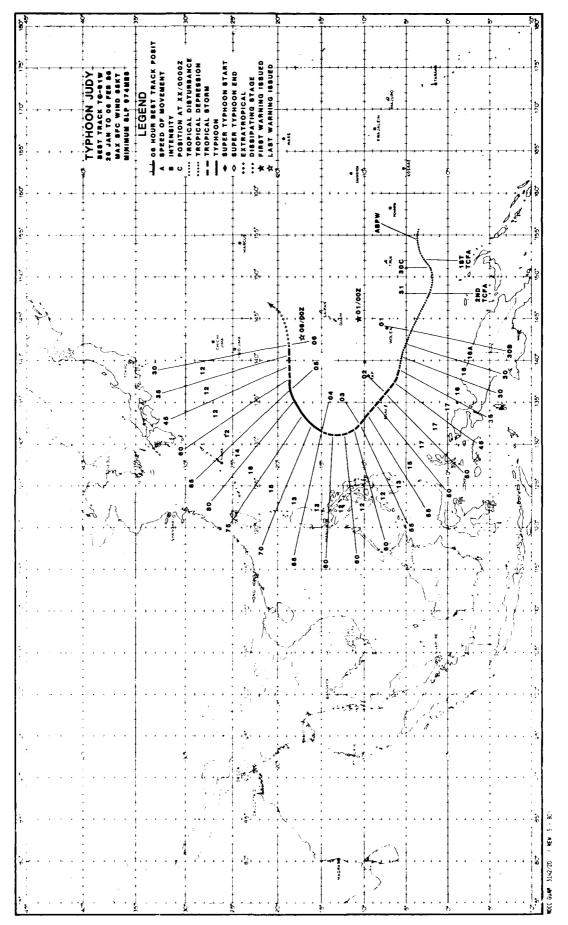

The formation of Typhoon Judy marked the start of the western North Pacific tropical cyclones for 1986. Judy originated near two degrees North Latitude in the near-equatorial trough. It was aided in its initial development by brisk northeasterly trade flow associated with a shear line situated to the north and the low latitude monsoonal westerlies in the southern hemisphere. Judy was also the season's first tropical cyclone to enter the mid-latitude westerlies and recurve.

During most of January, a winter weather pattern dominated the tropical western North Pacific area. Convective activity was confined to low istitudes on the periphery of the near-equatorial trough (NET). In the last week of January, the NET extended from the southern Philippines east-southeast to the equator 420 nm (778 km) south-southeast of the island of Pohnpei.

The cloud system first appeared late on 25 January as an area of disorganized convection 300 nm (556 km) in diameter. With unrestricted upper-level outflow to the north and west, the convection persisted through the diurnal minimum period (around 04002) on the 26th and was first noted on the Significant Tropical Weather Advisory (ABPW PGTW) at 2606007.

During the next three days, the convection continued a gradual increase in areal extent, but

remained poorly organized. Early on 29 January, an aircraft reconnaissance investigative mission flown into the disturbance was unable to locate a low-level circulation center. However, the Aerial Reconnaissance Weather Officer (ARWO) estimated a minimum sea-level pressure (MSLP) in the area at 1001 mb. Since this pressure was approximately 6 mb below the surrounding environmental MSLP to the north and the disturbance was expected to track westward into an upper-level environment with less vertical wind shear, a Tropical Cyclone Formation Alert (TCFA) was issued at 290630Z.

A second investigative mission flown early on the 30th also failed to locate a definite low-level circulation. The ARWO estimated maximum surface winds of 25 kt (13 m/sec) to 35 kt (18 m/sec) to the north in the easterly flow. Satellite imagery and synoptic data indicated this enhanced flow was a result of a shear line to the north of the disturbed area. Because of a decrease in both convection (diurnal) and low-level inflow, the TCFA for the disturbance was cancelled at 300600Z.

Post analysis indicates this cancellation was premature. Satellite imagery, over the next forty-eight hours, detected a dramatic increase in convection associated with this slowly westward moving disturbance. Analysis of satellite imagery (Figure 3-01-1) prompted the issuance of a second



Figure 3-01-1. Judy just prior to issuance of second TCFA (302349Z January DMSP visual imagery).

TCFA at 3101302. Twenty-four hours later, infrared satellite imagery indicated a upper-level anticyclone was developing over the disturbance and (Dvorak) satellite intensity analysis estimated surface winds of 30 kt (15 m/sec). This prompted the initial warning at 010000Z on Judy, as a 30 kt (15 m/sec) tropical depression. Within twenty-four hours, Judy was upgraded to tropical storm intensity based on the aircraft reconnaissance data.

The initial forecasts called for Judy to track west-northwestward. Due to the uncertainty of the position of the ridge axis and its strength over the data sparse Philippine Sea, 400 mb synoptic tracks were flown on the 2nd and 3rd of February to help define the mid-level flow north of Judy. Data from these flights confirmed the presence of the east-west orientation of the ridge axis and indicated a weakness in the ridge along 130 degree: East Longitude with strong westerly mid-level flow north of 16 degrees North Latitude. With the above information and mindful of a similar synoptic pattern associated with Typhoon Hope in December 1985, JTWC

altered the forecast to reflect initial northward movement followed by recurvature toward the northeast. As with Typnoon Hope (1985), Judy was expected to undergo a rapid extratropical transition with a drastic decrease in intensity and no significant eastward movement. The dynamic forecast guidance proved of no assistance in this regard apparently due to the strongly sheared/baroclinic environment.

Judy slowed slightly as it approached the riage near 131 degrees East Longitude early on 3 February. Continuing to intensify, the system tracked north briefly before turning northeast. Judy reached its maximum intensity of 85 kt (44 m/s) with a MSLP of 974 mb at 050000Z (see Figure 3-01-2). As it reached maximum intensity, Judy also came under the influence of strong mid-latitude westerlies. By 06000Z, Judy's convection had been sheared away and extratropical transition was complete. The nearly convective free low-level circulation drifted slowly east-northeast and dissipated. No deaths, injuries or property damage were attributed to Typhoon Judy.


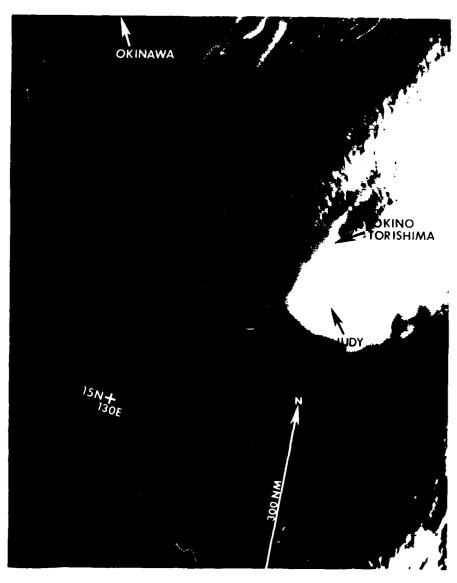


Figure 3-01-2 Typhoon Judy near maximum intensity (050120Z February DMSP visual imagery)

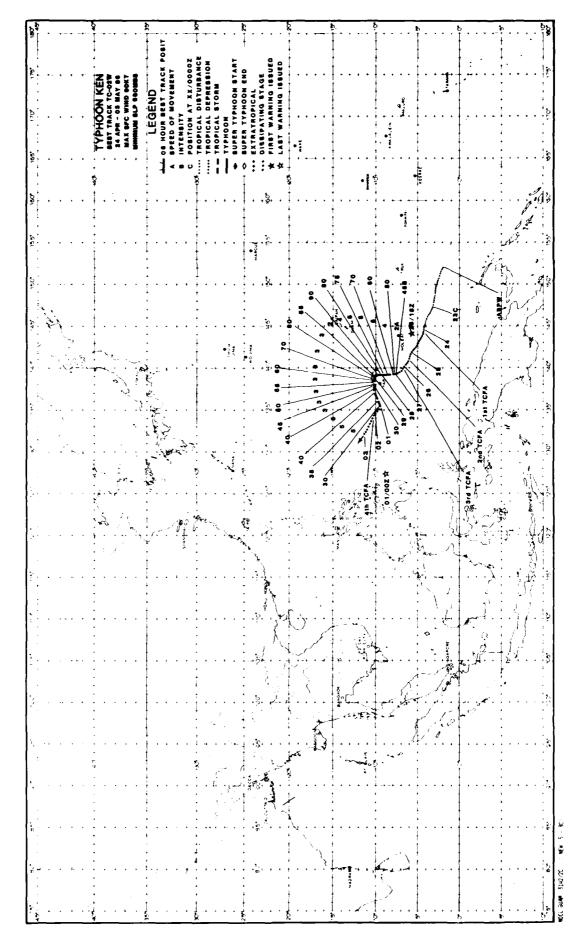

Typhoon Ken, the second tropical cyclone of 1986, was also the first tropical cyclone to develop in the western North Pacific in April during the past five years. After the formation of Ken, two tropical systems quickly followed in May.

During late April, the near-equatorial trough was quite active with enhanced convective activity from the southern Philippine Islands to the region south of Truk near the equator. Embedded within this trough was the tropical disturbance that eventually intensified into Typhoon Ken. At 200600Z, it was mentioned on the Significant Tropical Weather Advisory (ABPW PCTW) for the first time. No surface circulation was present, only convergent flow at the low levels. Synoptic data on 21 April indicated a weak surface circulation 540 nm (1000 km) south of Guam. The associated convection increased in amount and organization through the 23rd. Analysis of satellite imagery showed continued development and winds were estimated at 20 kt (10 m/sec). As a result, JTWC issued a Tropical Cyclone Formation Alert (TCFA) at 240730Z.

The first aircraft reconnaissance investigative mission was conducted the following day. It located a weak circulation center at 5000 ft (1524 m) 250 nm (463 km) southeast of Yap. Estimated surface winds were 10 to 25 kt (5 to 13 m/sec). These data, plus satellite imagery, prompted JTWC to reissue the TCFA at 250730Z.

A second aircraft reconnaissance investigative mission was conducted on the morning of the 26th and was again unable to locate a surface circulation. Instead, a broad area of troughing was observed at the surface with the maximum low-level winds of 25 to 30 kt (13 to 15 m/sec) within the convection banding in the northeast quadrant of the disturbance. Satellite data indicated the upper-level circulation center existed 90 nm (167 km) to the east-southeast of Yap (Figure 3-02-1). Based on that information, the third TCFA was issued at 260730Z.

The first warning on Ken was issued at 261900Z after satellite imagery showed a significant increase in the central convection and the development of a comma-shaped cloud pattern. Surface winds were

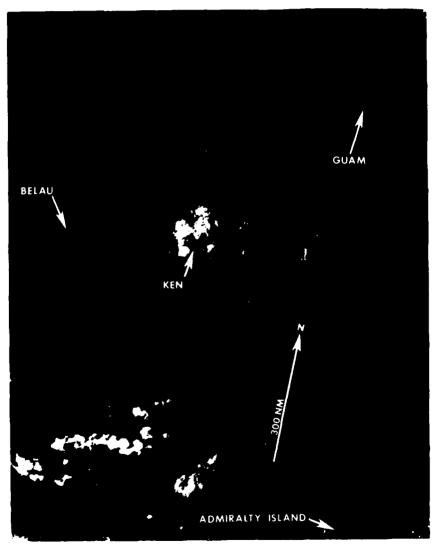


Figure 3-02-1. Typhoon Ken at the time the third TCFA was issued. The aircraft reconnaissance investigative mission into the disturbance two hours earlier was unable to find a surface circulation (260500). April NOAA visual imagery).

estimated at 35 kt (18 m/sec). Ken reached typhoon intensity on the 27th. Aircraft reconnaissance penetration of the system revealed a compact surface circulation, a minimum sea-level pressure (MSLP) of 980 mb. and an elliptical eye (oriented east-west). Peripheral aircraft data showed the stronger surface winds of 30 to 50 kt (15 to 26 m/sec) in the northern semicircle in contrast to 15 to 20 kt (8 to 10 m/sec) in the southern semicircle. This resulted from the higher pressure gradient between Ken's low pressure center and the subtropical ridge. As gradual intensification took place, the forecast track for Ken became more northerly based on the expected influence of the mid-latitude trough on the mid-level subtropical ridge and the general tendency or intensifying tropical cyclones to move into higher By 281800Z, after the trough passed latitudes. from eastward Japan. the subtropical ridge reintensified across the northern Philippine Sea, forcing Ken to move westward.

Ken's intensity peaked at 90 kt (46 m/sec) on the 28th. Satellite imagery showed the system remained compact with a slight east-west elongation of the central dense overcast and an eye which was obscured by high cirrus. On the 29th, Ken began to

significantly. Aircraft reconnaissance reports indicated that the 700 mb center was displaced 20 nm (37 km) northeast of the surface center due to increased shearing flow aloft from the Throughout the next day, both aircraft southwest. and satellite reconnaissance found an exposed low-level circulation center. Since the upper-level circulation center was now displaced 170 nm (315 km) to the northeast of the low-level circulation (Figure 3-02-2), the last warming, valid at 0300Z on the first of May, was issued. Stripped of its deep central convection, the residual low-level cyclonic vorticity drifted westward and dissipated over water by the 3rd.

No reports of damage or injuries were attributed to Ken. Of interest, Ken's proximity to Guam and slow movement caused official concern because of the scheduled refueling stop of Air Force One at Andersen AFB. Once the tropical cyclone's track changed to west late on 28 April, serious worries were removed. In summary, forecasting direction changes for slow moving tropical cyclones is usually difficult - Ken was no exception. JTWC's ability to correctly forecast slow movement along the track resulted in a good product and excellent statistics.


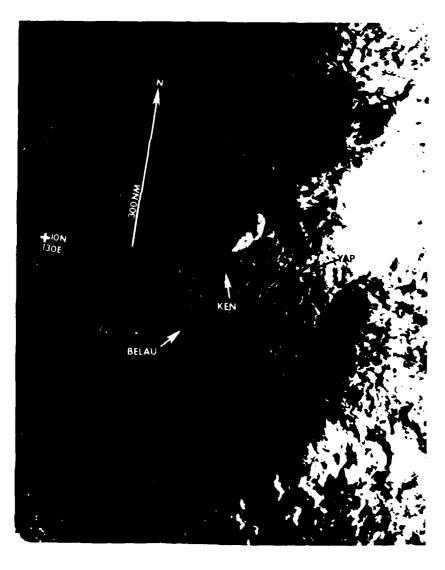


Figure 3-02-2. Typhoon Ken during its final stage Note the large (170 nm (315 km)) displacement between the exposed low-level circulation and the upper level circulation (302133Z April DMSP visual imagery)

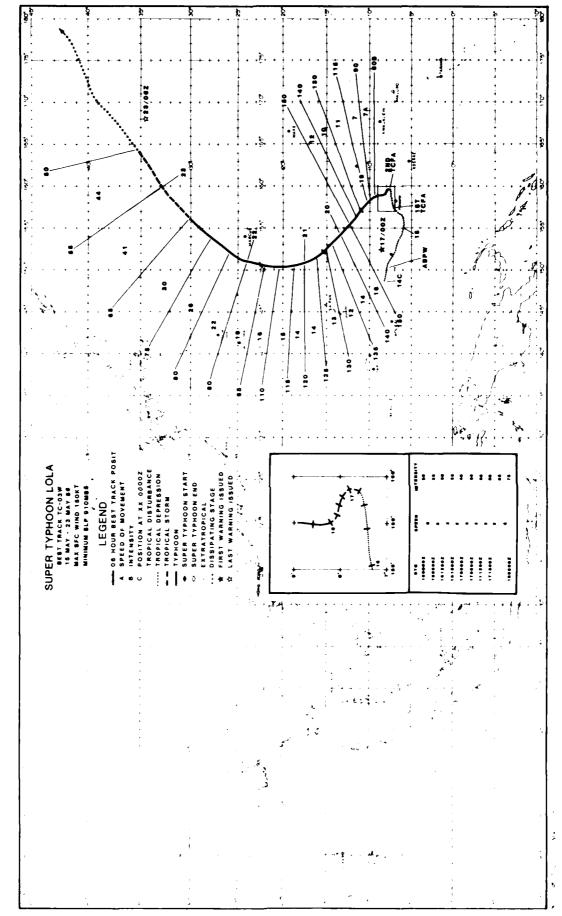

SUPER TYPHOON LOLA (03W)

Super Typhoon Lola was the first of three super typhoons (tropical cyclones with 130 kt (67 m/sec) or greater intensity) to occur during 1986. Lola's appearance coincided with a very destructive tropical cyclone in the southern hemisphere, Tropical Cyclone 33P (Namu) (see Figure 3-03-1). Namu, an unusual "twin" cyclone with Lola, was the worst tropical cyclone to strike the Solomon Islands this century. Over 90,000 people were left homeless on the island of Guadalcanal and nearly 100 people died as a result

of the fury of Namu. From a historical perspective, Lola was of particular interest to residents of Guam since its appearance coincided with the ten year anniversary of Super Typhoon Pamela's devastating visit to the island on May 21, 1976. Super Typhoon Pamela (1976) destroyed 40 percent of the homes on Guam and caused extensive damage with torrential rains and maximum sustained winds of 120 kt (63 m/sec) and gusts to 145 kt (70 m/sec).

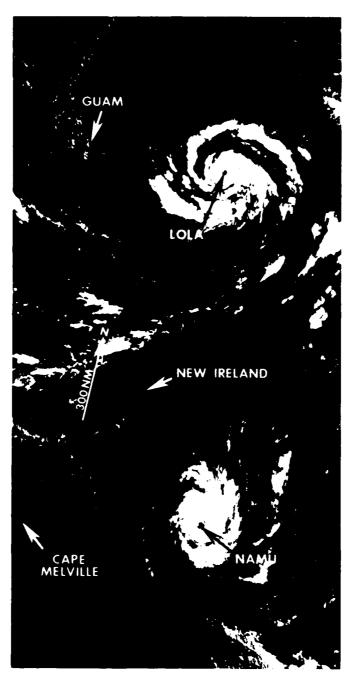


Figure 3-03-1 Super Typhoon Lola and Tropical Cyclone 33P (Namu). This is an unusual case of "twin" tropical cyclones occurring in opposite hemispheres (192349Z May DMSP visual imagery).

Let's began as a thippical disturbance in a Very softly-monsoon though extending from south of Jule exitain to the Marshall Islands. This area of listinged weather was -mnanged by two opposing wind flows - choss-equatorial winds provided suchwesterly flow and the thacewinds provided continuation; flow. For several lays prior to bola's indeption, destructive winds and terrential name tattered the larmine Islands. The Island atoll of Nukulmo in im logo km, southeast of Truk, for

example, experienced damage from winds of 40 kt (...) m/sec; with gusts to 60 kt (...) m/sec; or .4 May associated with severe thunderstorms.

At that time Loia was just a tropleal disturbance 50 nm (33 km) northwest of Truk and received mention on the Significant Tropleal Weather Advisory (ABPW PUTW) because of its persistent cloudiness. Within 24-hours, sea-level pressure dropped throughout the monsoon trough as Lois increased in organization (see Figure 5-03-2). These

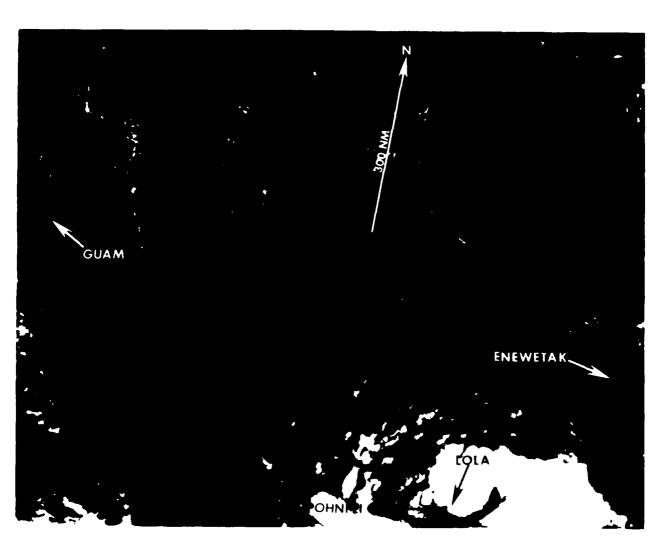


Figure 3-03-2 Lola showing increased organization at low latitudes (1823/0Z May DMSP visual imagery)

events prompted the issuance of a impirea. Cyclon-Formation Alert (IUFA) valid at 1525501. Alremait reconnaissance scheduled to investigate the disturbance at that time turned back to had the time loss of hydraulic fluid. A second JUFA was issued at 1015501 when Loia moved outside of the electuary in the first warning on Thopical expression CFW followed at 1000001 based on analysis of satellite imagery Figure 1-03-5, and synoptic data that obearly indicated a closed circulation. An

derial reconnaissance investigative mission later that day indevered winds of 40 kt (21 m/sec) at the surface and an estimated minimum sea-level pressure (M2DF) of 9d, mb. Lola was subsequently upgraded to a tropical sterm with the second warning, valid at 1/Joudi. Due to its proximity to Ponnpel, Lola caused extensive damage to the Island; mostly due to flooding and high winds. Authorities there claimed it was the worst battering Ponnpel had suffered in the past 20 years since Typhoon Ophelia (1900).

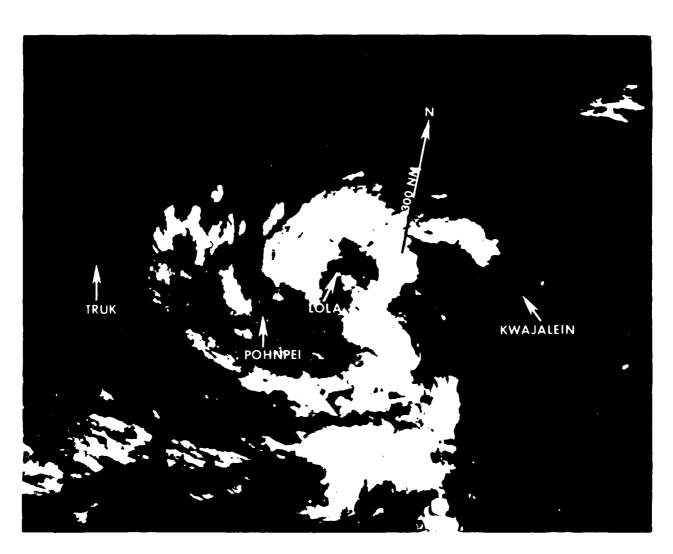


Figure 3-03-3. Tola a day later showing more convective activity and curvature c162-8092 May DMSP systal imagery).

By early morning on the 18th, Lola was already at typhoon intensity (see Figure 3-03-4). Initial interpretation of data from the second synoptic track mission flown along 18 degrees North Latitude determined there were no obvious breaks in the ridge north of Lola (Figure 3-03-5), thus the forecast took Lola northward initially, and then westward under the ridge. (Upon closer inspection of the 500 mb data, there is cyclonic turning at the western portion of the track. This implies a weakness in the subtropical ridge slightly north of the track and near 150 degrees East Longitude.) By late afternoon, Lola's intensity had increased to 75 kt (40 m/sec)

and an eye became clearly visible on satellite imagery. A third synoptic track, flown the next day (19 May), again along 18 degrees North Latitude, still did not find any breaks in the subtropical ridge and the forecast appeared to be right on track. However, Lola was only two days away and all of Guam worried that this might be a repeat of Super Typhoon Pamela (1976). JTWC's warming on the morning of the 19th indicated Lola would become a super typhoon (see Figure 3-03-6). A three fix mission was flown into Typhoon Lola that morning to determine the rate at which it was intensifying. The results confirmed the worst - explosive deepening.

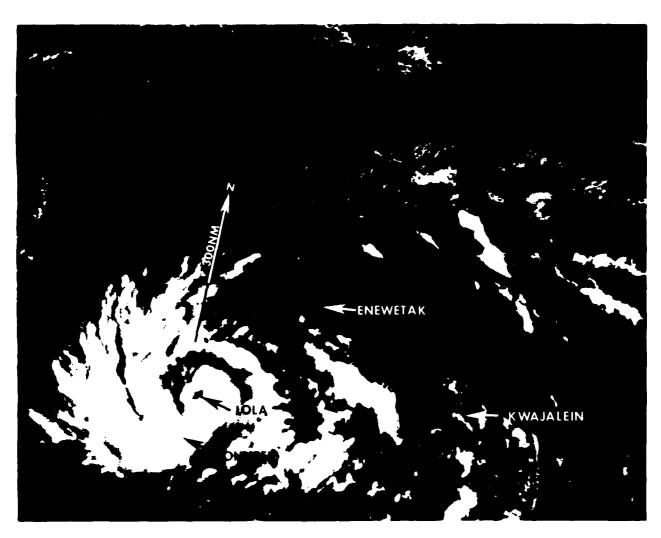


Figure 3-03-4 — Fola on the third day reached typhoon intensity (172249Z May DMSP visual imagery)

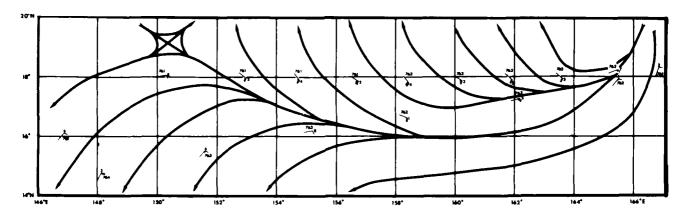


Figure 3-03-5. Data from the second synoptic track (172300Z through 180700Z) shows no obvious break in the subtropical ridge. (Upon closer inspection the streamlines imply a neutral point in the flow slightly north of the track and along 150 degrees East Longitude.)

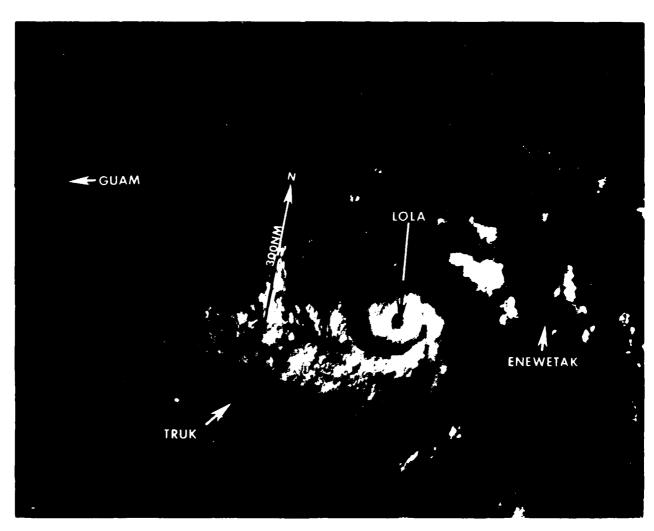


Figure 3-03-6. Lola near maximum intensity of 150 kt (77 m/sec) (190414Z May NOAA visual imagery).

Lola became a super typhoon at 130 kt (67 m/sec) and was forecast to intensify even more as it neared Guam. A fourth synoptic track mission was sent out on 20 May to locate any weakness in the subtropical ridge. The data snowed the ridge at 400 mb displaced south and west across the path of Lola with a strong zone of mid-level divergence stretching from Guam

through the northern Marianas (Figure 3-03-7). The forecast philosophy changed to a recurvature track rather than keeping the track toward the west-northwest. The intensity estimates indicated Lola had peaked at 191800Z at 150 kt (77 m/sec) and was now decreasing (see Figure 3-03-8). Aircraft reconnaissance that night (20 May) confirmed this

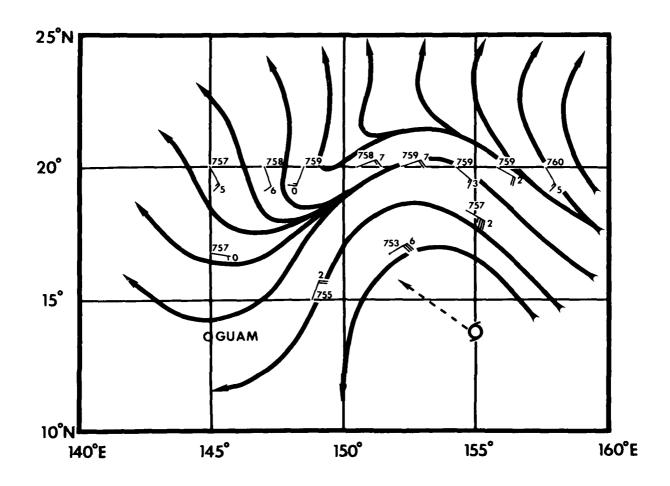


Figure 3-03-7. Data from the fourth synoptic track (192200Z through 200400Z May) shows the mid-level ridging displaced south and west across Guam.

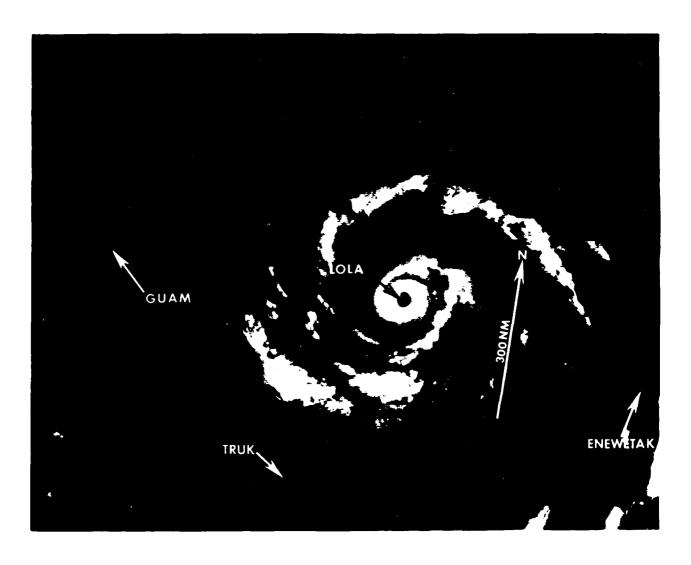


Figure 3-03-8. Lola shortly after it peaked at 150 kt (77 m/sec) (192350Z May DMSP visual imagery).

fact as the 700 mb heights also increased dramatically. Figures 3-03-9 and 3-03-10 show Lola weakening and becoming extratropical. Extratropical transition was completed on 23 May.

In retrospect, the early forecasts followed the Nested Tropical Cyclone Model (NTCM) too long during Lola's development and took the system toward the Marianas. Fortunately, JTWC made the right decision

later to follow the One-way Interactive Tropical Cyclone Model (OTCM) and curved Lola toward the northeast before any major efforts had to be made to sortie ships and evacuate aircraft from the military bases on Guam (closest point of approach to Guam was 405 nm (750 km) to the northeast). However, the statistical damage had already been done and the overall forecast performance was only fair.

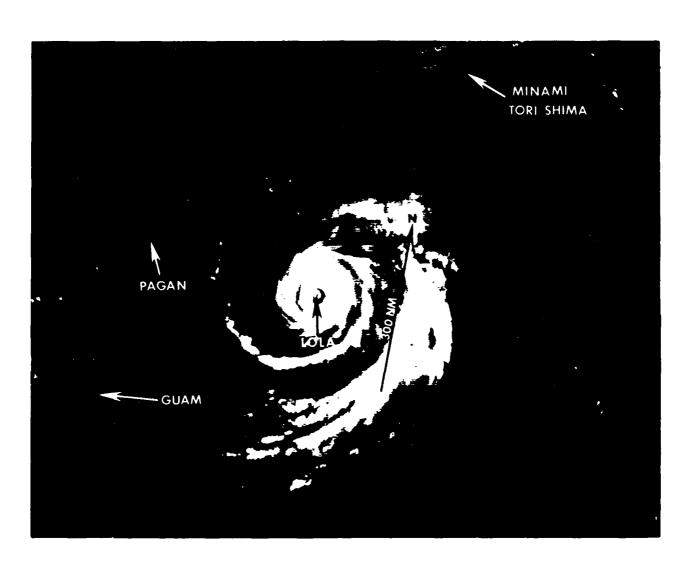


Figure 3-03-9. Lola decreasing in intensity (202329Z May DMSP visual imagery).


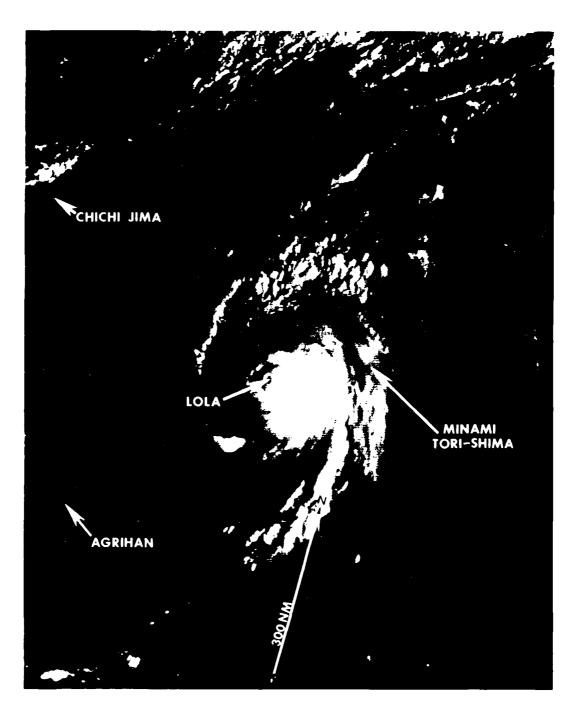


Figure 3-03-10. Tola transitioning to an extratropical system (212300Z May DMSP visual imagery)

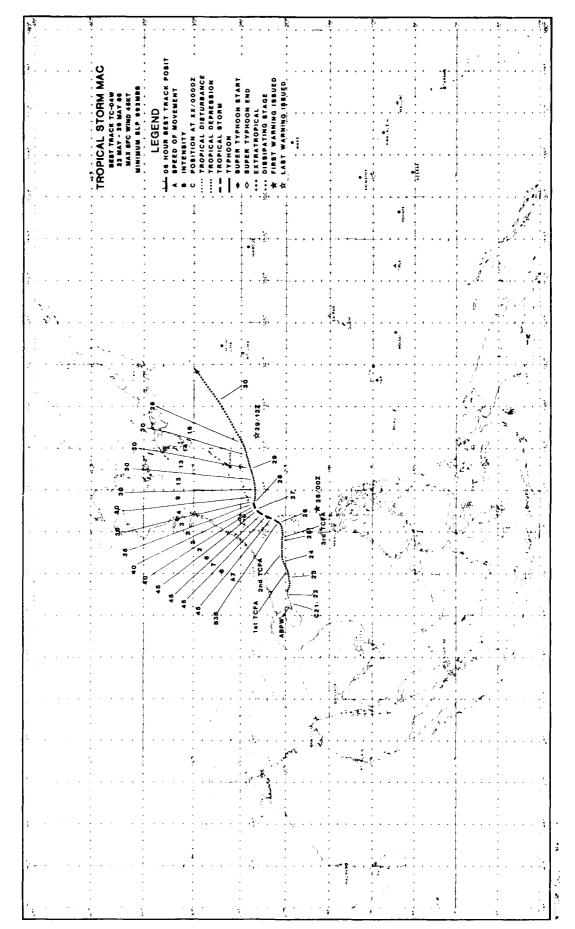

Mac, from inception, was a "classic" monsoon depression - slow to develop, difficult to position and forecast. As Super Typhoon Lola (03W) was developing east of Guam, the precursor of Mac spawned in the monsoon trough in the South China Sea.

On May 20th, the Significant Tropical Weather Advisory (ABPW PGTW) mentioned a poorly defined area of convection in the monsoon trough, which was located over water and paralleled the southern coast

of mainland China. Estimated maximum sustained surface winds of 20 kt (10 m/sec) and a minimum sea-level pressure (MSLP) of 998 mb were present. After several false starts, the organizing convection separated from the maximum cloudiness zone and a Tropical Cyclone Formation Alert was issued for the disturbance, at 230400Z, as it passed south of Hong Kong. The first warning was issued on Tropical Storm Mac (Figure 3-04-1) at 250000Z as development

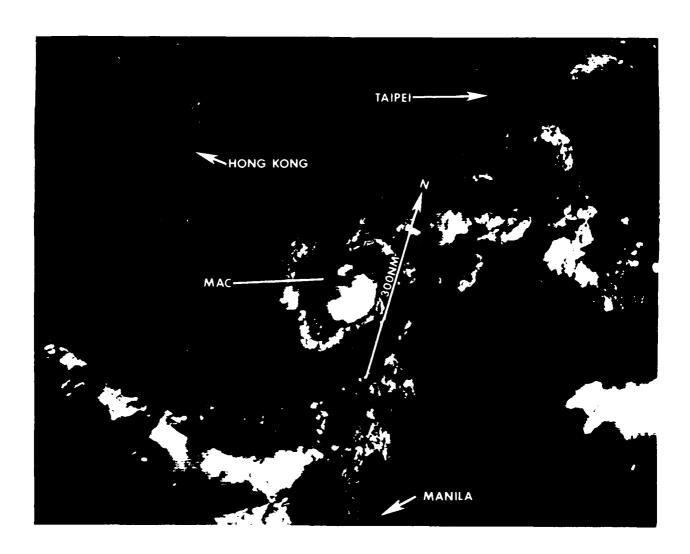


Figure 3-04-1. Tropical Depression 04W just an hour and a half after the first warning was issued (250131Z May DMSP visual imagery).

continued. Mac moved south of Taiwan and changed course toward the north-northeast as its intensity peaked at $45~\rm kt$ (23 m/sec). At 270900Z, Mac appeared to become almost quasi-stationary. However, acceleration and an eastward movement commenced by 280600Z. Mac also weakened due to increased vertical shear and was, as a result, downgraded to a tropical

depression on the 28th.

By May 29th, Mac's low-level circulation center was partially exposed (Figure 3-04-2). The last warning was issued at 291200Z as Mac began dissipating over water and redevelopment appeared less likely due to the persistent strong vertical wind shear.


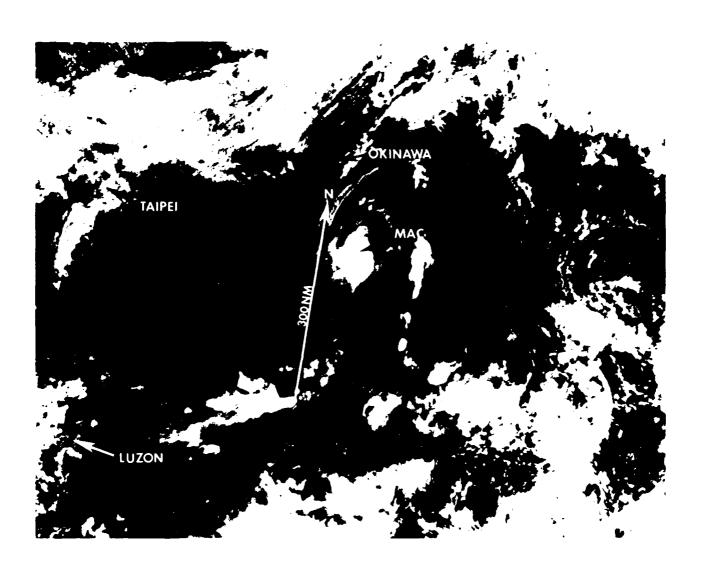


Figure 3-04-2. Mac's partially exposed low-level circulation center as seen six hours before the last warning was issued (290550Z May NOAA visual imagery)

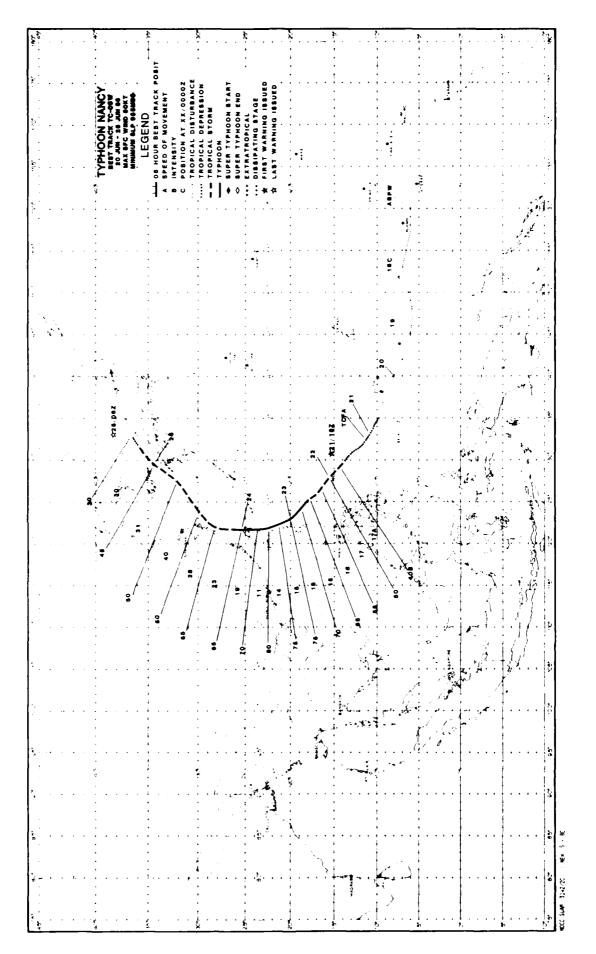

For the first five months of 1966, the western North Pacific averaged less than one tropical cyclone per month. Nancy was the fifth tropical cyclone in the western North Pacific, but the first of the what is generally considered the summer typhoon season. After Typhoon Nancy, the summer season was in full swing.

The Significant Tropical Weather Advisory (ABPW PUTW) on 1700002 June mentioned an area of broad, disorganized convection which was developing 120 nm (222 km) southeast of Pohnpei. This area moved and began to consolidate. By 191200Z, an established cirrus butflow pattern, restricted to the northwest by an upper-level cold low 540 nm (1000 km) northwest of Buam, was detected on satellite imagery. Initial Dvorak intensity analysis of the cloud pattern estimated surface winds of less than 25 kt (13 m/sec). At 210350Z, a Tropical Cyclone Formation Alert (TCFA) was issued for the area. Within hours the convective curvature improved and the 211600Z

Overak intensity estimate initiated winds for ktule m/secs. Based on these data, the first warning for Propical Depression Obb was issued at 2115000.

Aircraft recommaissance into Impiral Depression on at 200011 reported maximum surface while of 60 kt (1 m/sec) displaced of nm (1) km/ mast-southeast of the center of the system. Aircraft recommaissance also observed a leveloping eyewall that was open of the west through north qualinants. As a result, the 200000 warning upgrated Tropical Depression on to Tropical Storm Nancy, Dess than 24-hours after the upgrading to tropical storm intensity, Nancy was upgraded to typhoon intensity. In retrospect, analyses of aircraft recommaissance data and intensity trends indicate that tropical storm intensity was most probably attained at 211500Z, not 220000Z.

Throughout this period of development, Nancy (Figure 3-05-1) moved toward the northwest under the steering influence of the subtropical ridge to the north. Nearing the subtropical ridge axis on 23

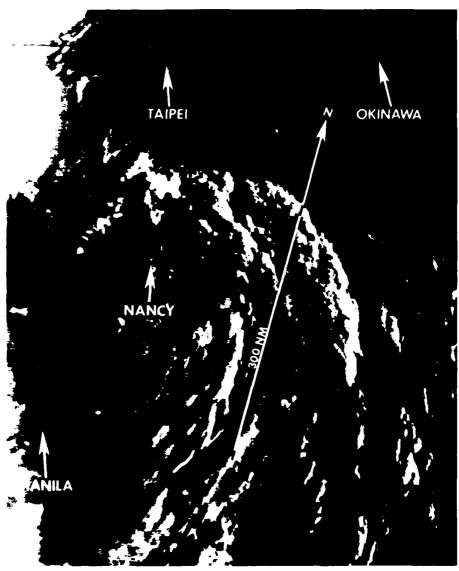


Figure 3-05-1. Typhoon Nancy approaching the island of Taiwan—The mountainous spine of the island is visible to the north of the tropical cyclone (222115Z June DMSP visual imagery)

June, the tropical cyclone assumed a more northerly For next the 24-hours aircraft reconnaissance data was unavailable due to the close proximity of land and airspace restrictions. Radar (Figure 3-05-2) and satellite (Figure 3-05-3) reports were particularly valuable during this time. two figures, which were taken within one half hour of each other, provide strikingly different remotely sensed presentations of the eye. The radar detects the encircling rainbands, that are embedded in the Shouds, and satellite sees the cold top of the dentral dense overcast as condentric patterns of gray shade. Just prior to making contact with the island

of Taiwan, Nancy's intensity peaked at 80 kt (41 m/sec). The maximum surface wind reported from Taiwan was 63 kt (32 m/sec).

Continuing to move northward across the East China Sea, Nancy began interacting with a trough in the polar westerlies. The shape of the tropical cyclone became elongated as the low-level circulation center separated from the upper-level and the central convection decreased. At that time, Typhoon Nancy was downgraded to a tropical storm.

Later, aircraft reconnaissance at 242141Z was unable to locate a low-level circulation center due to airspace restrictions; however the peripheral data

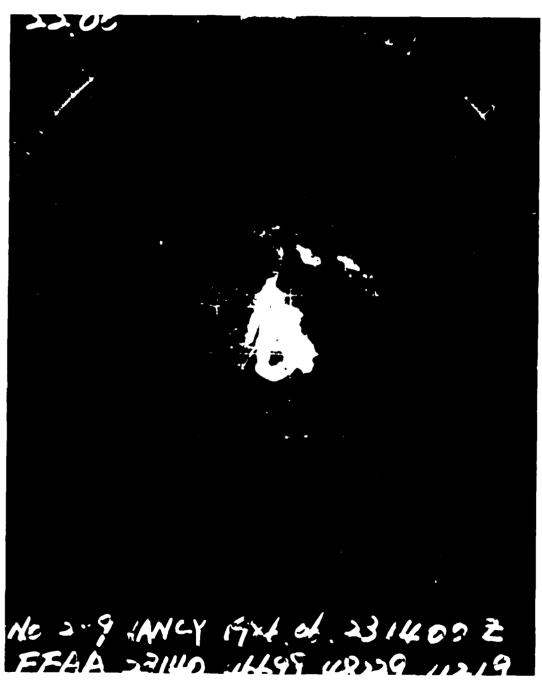


Figure 3-05-2. The eye of Typhoon Nancy as seen by radar from Hualien, Taiwan (WMO 46699) at 231400Z June (Photograph courtesy of Central Weather Bureau, Taipei, Taiwan).

proved most valuable and indicated the low-level center was displaced at least 60 nm (111 km) northwest of the 241800Z warning position. This warning position had been extrapolated from the previous warning. Unfortunately, the 241200Z warning was based on a low confidence nighttime position from infrared satellite imagery that was suspect, since Nancy was undergoing extratropical transition. The amended 241800Z warning, which followed immediately and was based on aircraft reconnaissance data, correctly forecast Nancy's movement through the Korea Straits instead of over the island of Kyushu, Japan. By that time increased vertical wind shear

and entrained cooler, drier air had taken their toll on the tropical cyclone. Nancy continued to move rapidly northeastward through the Korea Strait and maintained the strongest low-level winds in the southeast semicircle. Southern Korea received torrential rains, which inundated 22,477 agres 33,000 hectares) of farmland. Twelve people were reported dead or missing, as a result of the flooding.

Satellite analysis early on 25 June indicated extratropical transition had occurred in the Sea of Japan. The system was finalled on the 2506002 warning as the residual low pressure area swept eastward across northern Honshu 12-hours later.



Figure 3-05-3. Specially enhanced infrared image of Typhoon Nancy's eye. The gray shading, which is used in conjunction with the Dvorak enhanced infrared technique, can provide an estimate of the intensity of the tropical cyclone (231428Z June DMSP infrared imagery).



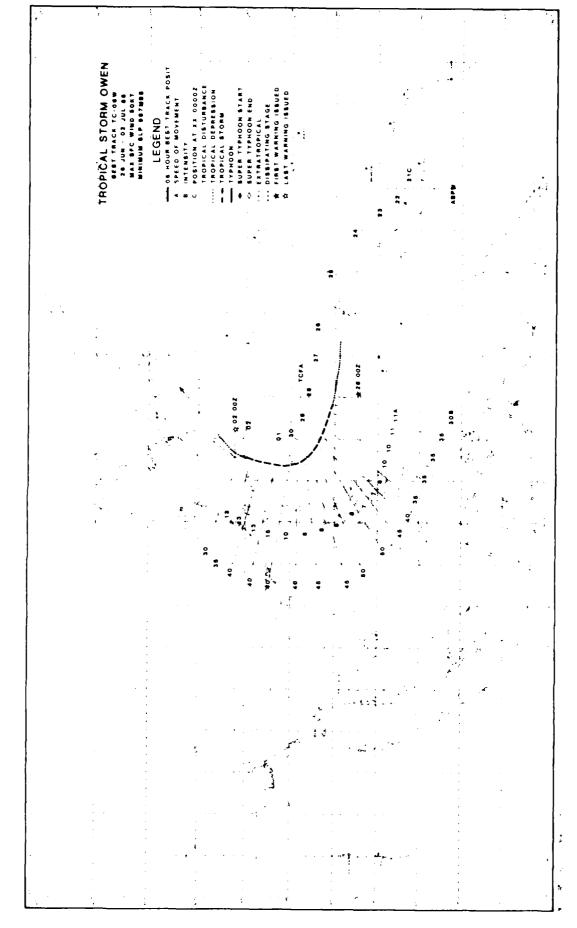


Figure 3-06-1 Tropical Storm Owen had a long history as a disturbance. It was first noted as a suspect area on the Significant Tropical Weather Advisory (ABPW PGTW) at 0600Z on the 21st of June. As the system became more organized, its intensity increased. This prompted the issuance of a Tropical Cyclone Formation Alert at 271800Z when it was west of Guam in the Philippine Sea. Based on aircraft reconnaissance reports (272325Z) of 30 kt (15 m/sec) maximum sustained winds and a minimum sea-level pressure of 1001 mb, JTWC began warning on the system at 280000Z. On the 29th, Owen reached its maximum intensity of 50 kt (26 m/sec). As Owen moved northwestward around the periphery of the subtropical ridge, it came into an area of increased vertical shear. This resulted in the deep convection becoming displaced toward the west-southwest. By the 2nd of July, it had lost its tropical characteristics and dissipated over water. The imagery shows Owen's exposed low-level circulation center during the system's weakening phase (300108Z June DMSP visual imagery).

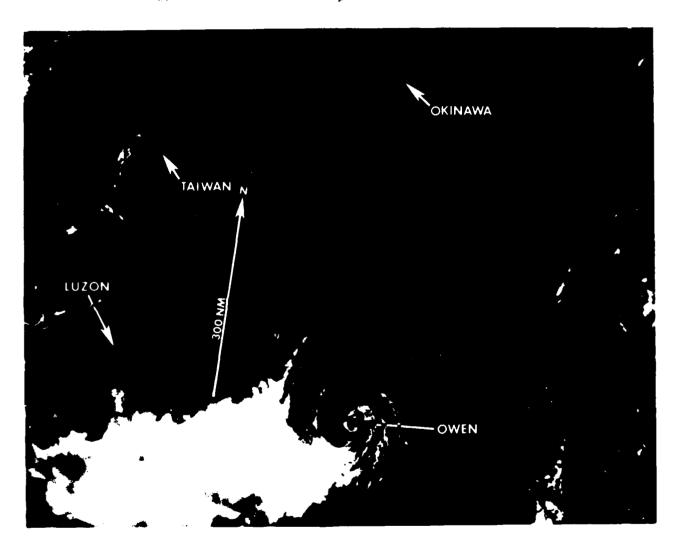

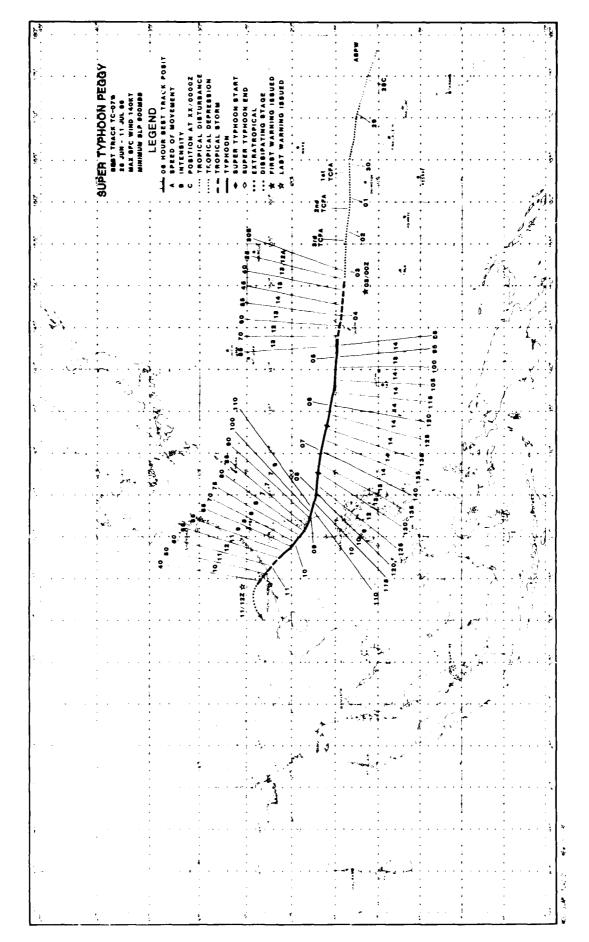

Peggy was the second super typhoon of the 1986 WESTPAC season. With the help of the Theta-E intensity forecast technique, intensity errors were kept to a minimum. In contrast, forecast track problems arose due to erroneous guidance from the one-way Interactive Tropical Cyclone Model (OTCM) which had a consistent northward bias at 72-hours.

During the latter part of June, the low-level, low-latitude tropical easterlies between the eastern Caroline Islands and the International Dateline were weaker than normal. In this area between the equator and 10 North Latitude, the light and variable winds, in conjunction with the tropical easterlies to the north, formed a vortex 600 nm (1111 km) east of Kwajalein Atoll in the Marshall Islands. It was first mentioned on the 270600Z June Significant Tropical Weather Advisory (ABPW PGTW) after satellite imagery showed persistent convection had developed. The circulation moved west-northwestward for six days before reaching tropical storm intensity (35 kt (18 m/sec)) 350 nm (648 km) east of Guam. Throughout this period the cloud signature caused heightened

concern for Guam, however aircraft reconnaissance flights did not locate any supporting strong winds. At 0300002 July, JTWC issued its first warning on Tropical Depression 07W based on maximum winds of 25 kt (13 m/sec) from synoptic reports and the potential for intensification near Guam. Twelve hours later Peggy was upgraded to a tropical storm, when aircraft reconnaissance found a band of 35 kt (18 m/sec) surface winds displaced 20-40 nm (37-74 km) northwest of the vortex center.

Continuing to move west-northwestward, Peggy passed 58 nm (107 km) north of Guam at 040700Z. Peak winds experienced on Guam were 28 kt (14 m/sec) with gusts to 48 kt (25 m/sec). There was limited damage to Guam, restricted primarily to power poles and crops. The islands of Rota, Tinian and Saipan experienced more extensive damage - primarily to crops.

During the period 042352Z to 062040Z, Peggy's mean sea-level pressure (MSLP) dropped from 973 mb to 900 mb - a decrease of 73 mb. This corresponds to a drop of approximately 1.6 mb/hour which is classified

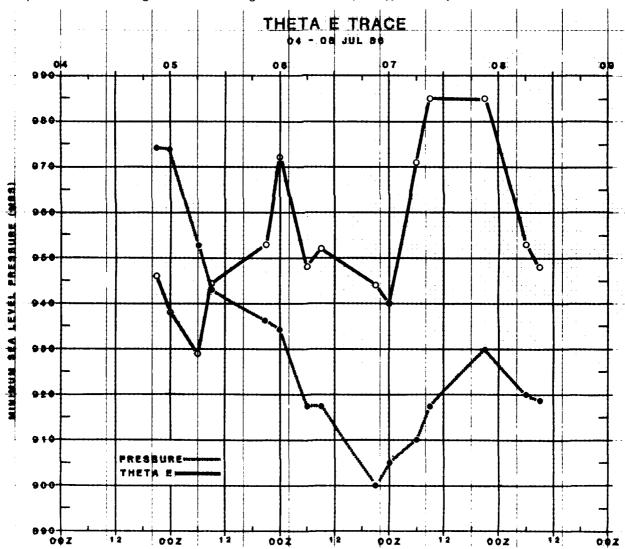


Figure 3-07-1. Plot of Peggy's central minimum sea-level pressure and the Theta-E line with the intersection at 050800Z. Rapid deepening occurred with a 1 6 mb/hour drop in central pressure from 973 mb to 900 mb.

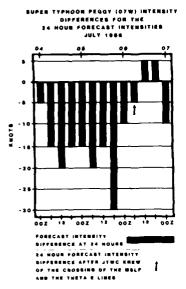


Figure 3-07-2. A graph of the difference between the actual best track intensities and the 24-hour forecast intensities before and after ITWC knew the sea-level pressure and Theta-E line intersected (reference Figure 2007).

as rapid deepening (Holliday and Thompson, 1979). The rate of deepening does not meet the 2.5 mb/hour criterion used to define explosive deepening. mentioned earlier, JTWC was able to significantly decrease forecast intensity errors, with the guidance provided by Theta-E intensity forecast technique (Dunnavan, 1981). The technique uses equivalent potential temperature (Theta-E), calculated from aircraft recon 700 mb temperature and dew point reports, as a measure of the tropical cyclone's thermodynamic energy. When the plots of Theta-E and MSLP intersect near the critical values of 950 mb and 360 degrees Kelvin, central pressure can be expected to drop to below 925 mb. Figure 3-07-1 shows the plot of Peggy's Theta-E and MSLP values during the period 042050Z to 080856Z. The intersection point is The graph of the 24-hour forecast at 050800Z. intensity (Figure 3-07-2) demonstrates the difference before and after the knowledge of the Theta-E The average 24-hour forecast intensity crossing. error before 050600Z (the first foreknowledge of increased potential for explosive or rapid deepening) was 16 kt (8 m/sec). The average 24-hour forecast intensity error after 050600Z was 5 kt (3 m/sec). With regard to 48-hour forecast intensities, only one warning benefited because two days after 050600Z, Super Typhoon Peggy's intensity peaked at 140 kt (72

Figure 3-07-3 shows Super Typhoon Peggy at its maximum intensity. Peggy remained on the west-northwestward track and slammed into northern Luzon at 082200Z with 95 kt (49 m/sec) surface winds. Newspaper accounts of Peggy's fury reported ninety-three people died, 16 were missing, over 116,000 families were homeless, and damage was estimated at 2.5 million dollars. Most of this damage, primarily to crops and villages, was the result of torrential rain. Also, two people lost their lives in southern Taiwan.

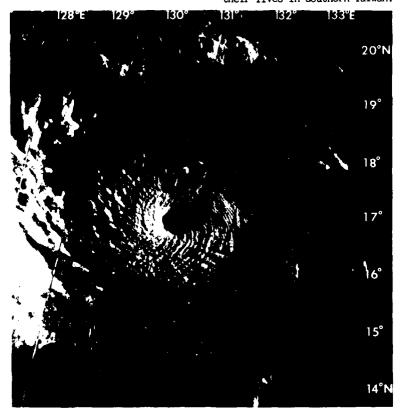


Figure 3-07-3. Super Typhoon Peggy at maximum intensity of 140 kt (72 m/sec) (062120Z July DMSP visual imagery courtesy of H and HS Weather, MCAS Futenma).

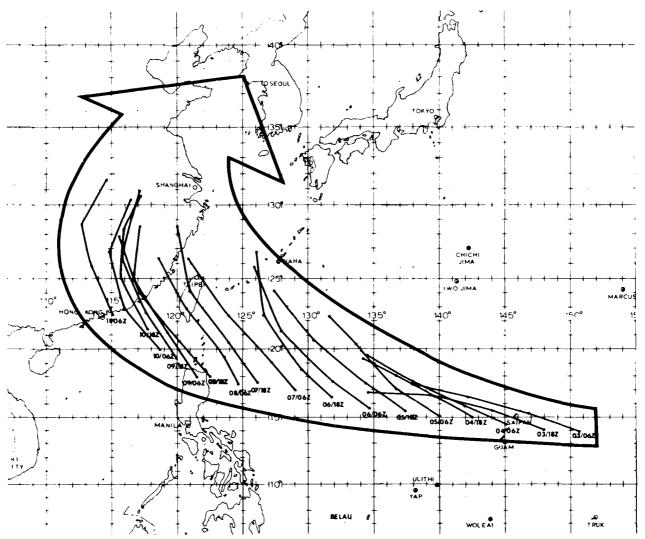


Figure 3-07-4. Plot of OTCM guidance through 72-hours for each twelve hour period. Note the continuous northward bias from the loci of initial points.

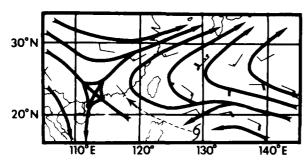


Figure 3-07-5 The 400 mb Numerical Variational Analysis (NVA) for 071200Z July with Peggy's position. The effect of the subtropical ridge can be implied from the plot of the final best track.

After crossing northern Luzon and moving into the South China Sea, Peggy continued to slowly weaken. It made landfall over southern China 80 nm (148 km) east of Hong Kong at 110200Z with an intensity of 55 kt (28 m/sec) Widespread flooding resulted across southern China and over 200 people were reported dead.

The track forecasts from the first warning through the 21st warning (at 080000Z) repeatedly called for a more northerly track than was observed. Guidance from the OTCM hinted at recurvature (Figure 3-07-4). Initially the NOGAPS prognoses, 021200Z to 060000Z, indicated slow weakening of the subtropical ridge poleward of Peggy. However, from 061200Z through 120000Z the NOGAPS prognoses reversed this trend and began slow ridge building. Although NOGAPS suggested a stronger subtropical ridge, guidance from OTCM persistently called for a more northerly track. The 400 mb NVA analysis at 071200Z (Figure 3-07-5) shows the location of the ridge and Peggy's ultimate track.

\$	9	<u> </u>	<u> </u>	Ş	!	b	\$ ·	h !		
· · · · · · · · · · · · · · · · · · ·	· ·	÷ ÷ • • • • • • • • • • • • • • • • • •	•	• • •	•		† †	! :	: .	
	DER.	LEGEND 06 HOUR BEST TRACK POSIT SPEED OF MOVEMENT INTENSITY POSITION AT XX/00002	TROPICAL DISTURBANCE TROPICAL DEPRESSION TROPICAL STORM TYPHOON SUPER TYPHOON START	IND SUED	• • • • •				<i>,</i>	· · · · · · · · · · · · · · · · · · ·
	YPHOON ROGE BEST TRACK TC-08W 11 JUL - 17 JUL 66 MAX SPC WIND 86KT	LEGEND OF HOUR BEST TRACK P SPEED OF MOVEMENT INTENSITY POSITION AT XX/0000Z	TROPICAL DISTURBANC TROPICAL DEPRESSION TROPICAL STORM TYPHOON STAR	SUPER TYPHOON END EXTRATROPICAL DISSIPATING STAGE FIRST WARNING ISSUED			4			· · ,
•	HOON TRAC	LEGEND DE HOUR BEST T SPEED OF MOVER INTENSITY POSITION AT XXX	TROPICAL ITROPICAL ITROPICAL ITYPHOON	SUPER TYPHOON EXTRATROPICAL DISSIPATING STA FIRST WARNING I	• [•	•	· · ·		
	TYPHOON ROGER sest track tc-oaw 11 Jul 17 Jul. 66 MAX SFC WIND SSKT MINIMUM SLP 656M88			SUPE EXTR PESTIN TA FIRST	M dev	· · · · · · · · · · · · · · · · · · ·				+ + · · · · · · · · · · · · · · · · · ·
· ·		.] < • •		(* * * * * * * * * * * * * * * * * * *			•	· · ·		
		· ·	Ţ • •	· ·		100	•			
· · · ·			,	,	•	/		,	· · · · · · · · · · · · · · · · · · ·	
	•		•	})	• •	· · · · · · ·		
	•			•	2 .			•	Ċ	JULA.
	•		• • •				•		· · · · · · · · · · · · · · · · · · ·	Y
		.	· • • • • • • • • • • • • • • • • • • •		٠٤ 🗸	z00/εί.¥	•			
		\$17/122	•				•••			j.
		13/	· · · · · · · · · · · · · · · · · · ·	• /	1.7.	3	· · · · · · · · · · · · · · · · · · ·			inger in die Se
	. 83					5.	80	• • • • • • • • •	ا د په کوش	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
	\$ 50.00 8				2.		8		ide gr	
	· · · · · · · · · · · · · · · · · · ·	^ • /· · / <u>·</u> / · ·			12/2	19.00				
			4.0		(Ļ→		
				1//	00 07		• •		•	
			. 0	8	. -					
		•	•			· ·	•			
		*					. .		•	•
		• • • • • • • • • • • • • • • • • • • •					• • • • • • • • • • • • • • • • • • •		egraphi G	
		· · · · · · · · · · · · · · · · · · ·	•				· · · · · · · · · · · · · · · · · · · ·			
		•			*.	44.53			, 	
					13					· · · .
		•	* .	ř,						
				. 3				•		•
			•	*			· · · · · · · · · · · · · · · · · · ·			•
			1			· · · · · • • • • · · · · · · · · · · ·	. این از مراجع			
						. ;	. .			
		÷ ÷	: :				: •	· 		

Typhoon Roger was initially enhanced by a Tropical Upper-Tropospheric Trough (TUTT) cell as described by Sadler (1976). On 4 July 1986, as Typhoon Peggy was moving toward the west, away from Guam, a TUTT cell was observed moving west-northwestward from a location 780 nm (1445 km) east of Wake Island. The well-developed TUTT cell and its associated convection continued this movement for the next five days. By 8 July, a tropical disturbance had developed from this area of convection about 30 nm (56 km) southwest of Enewetak Atoll. It persisted into the next day when it was included in the Significant Tropical Weather Advisory (ABPW PCTW) for the first time. Initially, Roger showed little potential for development into a tropical disturbance. Over the next two days,

however, the convective area became more organized as cross-equatorial westerlies converged with the tradewind easterlies at low-levels and an anticyclone formed aloft.

The divergent upper-level flow southeast of the TUTT cell continued to provide a favorable environment for the tropical disturbance to develop slowly during the next three and a half days. A Tropical Cyclone Formation Alert (TCPA) was issued for the system at 1107172. Satellite imagery (Figure 3-08-1) at 120024Z July shows the tropical depression. The first warning was issued at 130000Z, because the system continued to increase in convective organization and a minimum sea-level pressure of 999 mb was observed by aircraft reconnaissance at 122245Z.

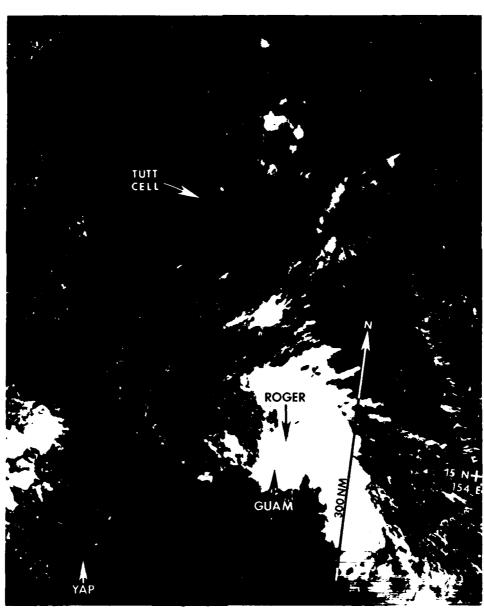


Figure 3-08-1. Roger as a tropical depression. Note the effect of the TUTT cell northwest of the depression which causes a deformation and enhancement of the cirrus outflow pattern to the southeast (120024Z July DMSP visual imagery).

During all stages of development, Typhoon Roger remained small in size. Aerial Reconnaissance Weather Officers flying into Roger consistently reported the diameter of the light and variable surface wind center as 1 nm (2 km) to 4 nm (7 km). Figure 3-08-2 shows Roger's small eye and central convective mass.

JTWC accurately forecast Roger's track and point of recurvature. Roger moved west-northwestward while south of the 700 mb subtropical ridge; then northward, and later northeastward as it recurved around the western end of the ridge. Figure 3-08-3 shows the location and orientation of the subtropical ridge as reflected in the 700 mb data on 131200Z July. The guidance from the One-way Interactive Tropical Cyclone Model (OTCM), JTWC's primary forecast aid, was generally good although the model repeatedly suggested a tighter recurvature track at the 24-hour point (approximately 180 nm (333 km) farther to the east) than was actually observed. Figure 3-08-4 is a plot of the initial and 24-hour points from the OTCM showing this bias toward the east.

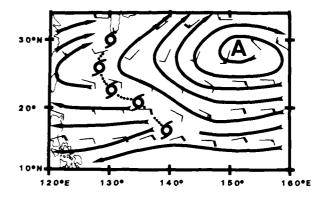


Figure 3-08-3. The 700 mb Wind Analysis on 131200Z July showing location and orientation of the subtropical ridge that influenced Roger's movement. The dashed line shows Typhoon Roger's eventual track.



Figure 3-08-2. Typhoon Roger near maximum intensity A small eye is present in the central convective mass (150104Z July DMSP visual imagery).

After recurvature toward the northeast, Typhoon Roger began extratropical transition as it encountered the shearing environment that caused its convection to be displaced to the southwest of the low-level circulation center (Figure 3-08-5). This shearing away of the central convection caused Roger to weaken further. The stratified nature of the low-level cloud (in Figure 3-08-5) is indicative of extratropical transition.

Although Typhoon Poger passed just 45 nm (83 km) east of the island of Okinawa and Kadena Air Base, the effect was minimal due to its small size. Peak gusts of 43 kt (22 m/sec) were reported and the northerm part of the island received about 1 inch (254 mm) of rainfall. "U.S. military installations on Okinawa spent most of Wedresday (10 July) in typhoon condition one (and) Japanese schools were closed during the day. Approximately 4000 tourists were stranded briefly at Naha Airport during the day as 21 flights were cancelled because of the storm. Airline officials said all those passengers were on their way by late afternoon." There were no reports of injuries or significant damage on Okinawa or to shipping.

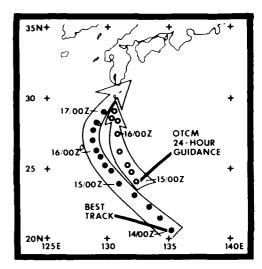


Figure 3-08-4. Plot of OTCM (One-way Interactive Tropical Cyclone Model) forecast tracks for period 140000Z to 161800Z July.


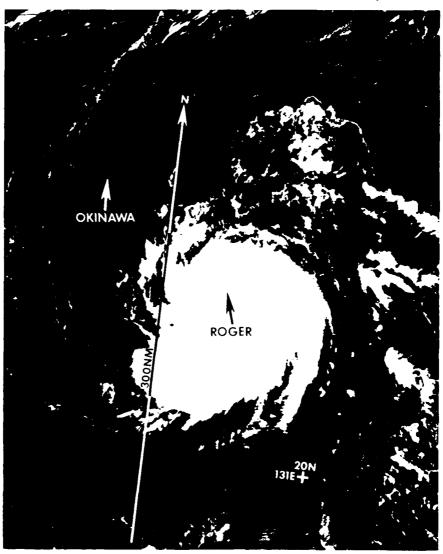


Figure 3-08-5. Satellite imagery of Roger showing the exposed low-level circulation center and central convection displaced to the southwest. Note the stratified nature of the low-level clouds associated with extratropical transition (170527Z July NOAA visual imagers).

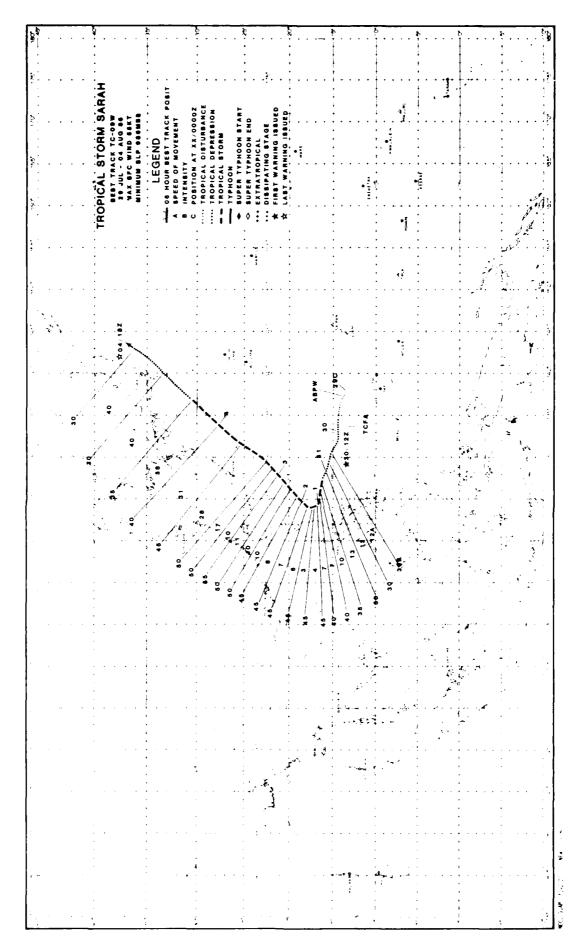

The summer monsoon was well established and had stronger than normal low-level westerlies from the Caroline to the Marshall Islands by mid-July. From the 21st of July onward, the conditions were ripe for cyclogenesis. After daily mention in the Significant Tropical Weather Advisory (ABPW PGTW) and several false alarms, a Tropical Cyclone Formation Alert (TCTA) was issued for a rapidly developing area of convection in the Philippine Sea 420 nm (778 km) north of Belau.

The aircraft reconnaissance flight investigating this disturbed area at 3001522 located a weak, low-level circulation center with maximum surface winds of 18 kt (9 m/sec) and a minimum sea-level pressure (MSLP) of 1001 mb. The first warning for Tropical Depression 09W followed at 3012002 as convection and winds increased on the south side of the vortex.

Subsequent intensification of this system was masked from satellite imagery by the heightened convective activity in the monsoonal westerlies.

Aircraft reconnaissance into the tropical cyclone at 311525Z found 40 kt (21 m/sec) surface winds, which prompted the upgrade to Tropical Storm Sarah. During this period, the tropical cyclone's west-northwestward movement slowed and the system, which appeared to be following an under-the-ridge scenario, continued to consolidate.

Later aircraft reconnaissance at 3112138Z and 010009Z confirmed the slowing trend and the Aerial Reconnaissance Weather Officer (ARWO) reported that multiple circulation centers might be present. Additionally, the ARWO estimated the ring of maximum surface winds as nearly symmetrical with slightly weaker winds in the northern semicircle displaced 20 to 60 nm (32 to 96 km) from the center.

As Sarah moved closer to the island of Luzon, it became increasingly more difficult to locate the circulation center. The major convective area shifted to the northwest quadrant (see Figure 3-09-1). Aircraft reconnaissance at 011300Z (Figure

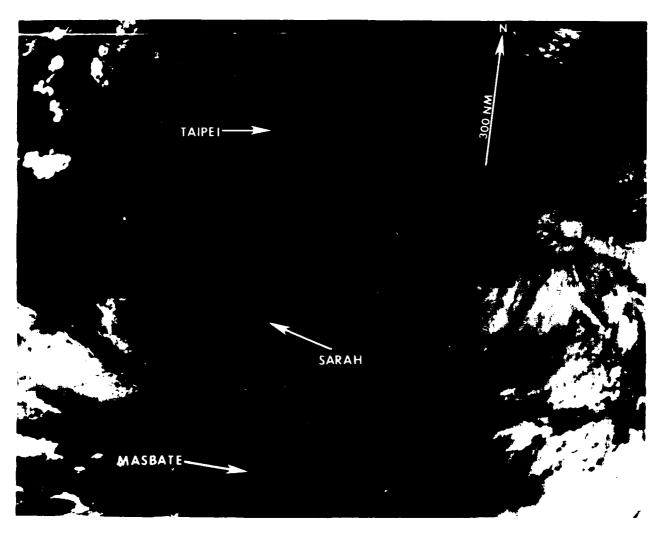


Figure 3-09-1: "Where is Sarah". That was the question when this image was received. The trend from previous satellite imagery was for the deep convection to continue westward movement across northern Luzon appears to be maintained (010608Z August NOAA visual imagers).

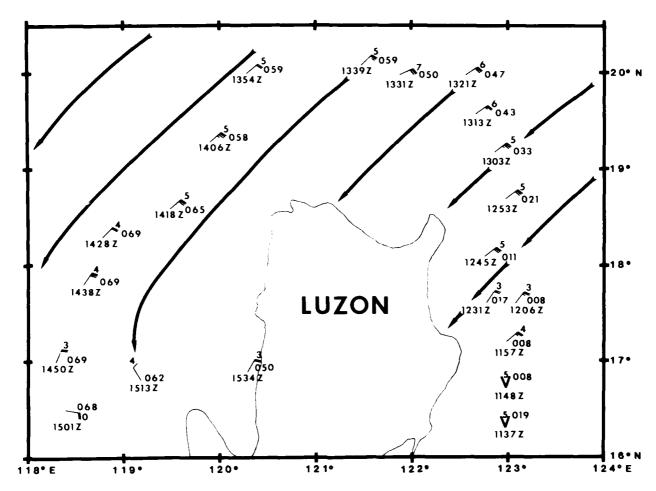


Figure 3-09-2. A plot of the 011300Z August aircraft reconnaissance mission around northern Luzon. These data imply that the low-level circulation in the monsoon trough (i.e., Sarah) may have remained in the Philippine Sea.

3-09-2) flew around northern Luzon and detected only broadscale northeasterly flow without a trace of a low-level circulation center. These northeasterly winds should have provided a valuable clue as to the location of Sarah. (In retrospect, it took more than 24-hours to get the forecast back on the right track.) In the interim, the persistent deep cloudiness across northern Luzon as viewed by the meteorological satellite imagery implied that Sarah was continuing into the South China Sea and towards mainland China. The dynamic guidance provided by Nested Tropical Cyclone Model (NTCM) and One-Way Interactive Tropical Cyclone Model (OTCM) endorsed this movement into the South China Sea.

Again, aircraft recomnaissance between 0121002 and 0200002 was unable to locate a Sarah. This time the flight was west of Luzon in the South China Sea. An aircraft mission previously scheduled to investigate a TCPA area northeast of Luzon, however, did find Sarah in the Philippine Sea. Satellite imagery after 012100Z also showed a reorganization of deep convection east of Luzon. This resulted in a relocation and an abrupt change in forecast philosophy. No longer was Sarah following the under-the-ridge scenario into the South China Sea,

but now was moving northeastward (Figure 3-09-3).

After 030600Z August, Sarah started accelerating toward the northeast in response to increasing westerly wind flow aloft. By 050000Z, the system moved to a position east of the island of Honshu and transitioned to an extratropical cyclone.

Reanalyses of aircraft, satellite, radar and conventional data after—the—fact revealed the following. As Sarah approached northern Luzon, the upper—level circulation center became displaced from the low—level center and moved across the mountainous terrain of the island and dissipated in the South China Sea. The residual low—level vortex, which was weak and difficult to locate, remained east of Luzon in the active monsoon trough. The monsoon trough changed its orientation gradually from east—west to northeast—southwest, as Sarah reintensified and moved northeastward. The aircraft mission at 0113002 (Figure 3-09-2) was a key piece of data in reconstructing what happened in this difficult situation. The broad northeasterly flow across northern Luzon implied that Sarah remained in the Philippine Sea and was masked by the monsoon trough and vigorous convection closeby.



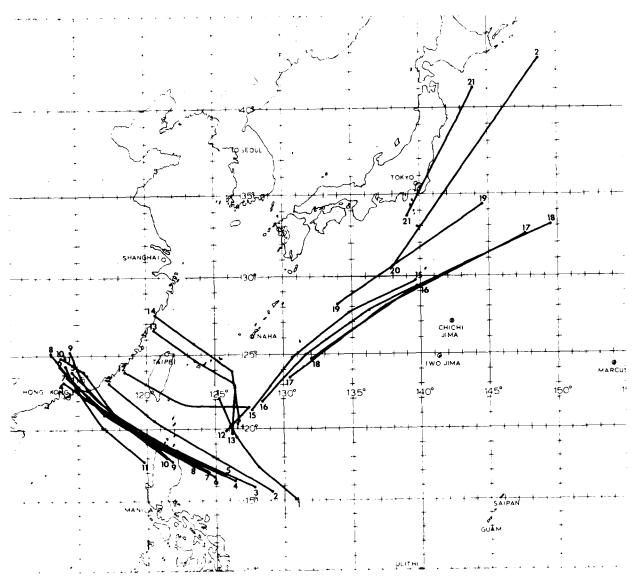


Figure 3-09-3. Plots of the forecast tracks for Sarah. Note the abrupt change between warnings 11 and 15. The difficulty in locating the low-level circulation center and understanding the changing synoptic situation prolonged the time (warnings 9 through 14) it took to get the forecasts back on the right track.

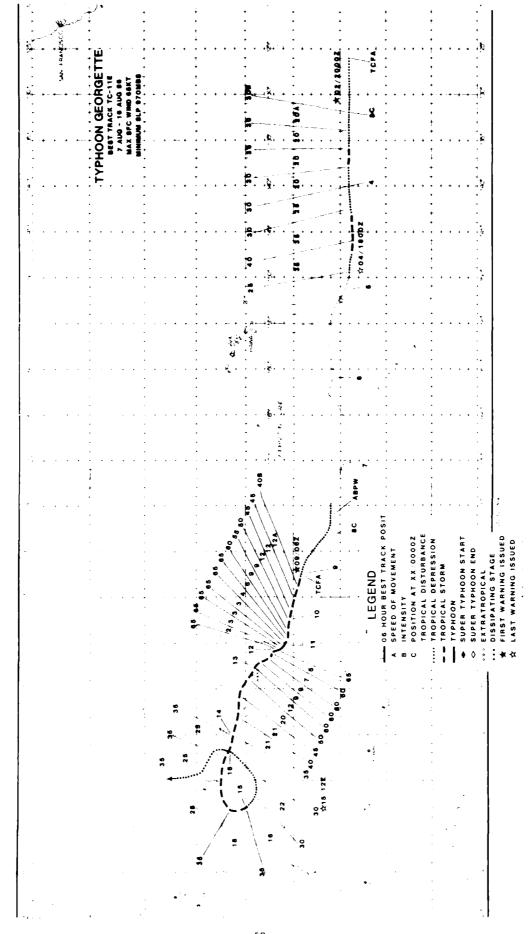

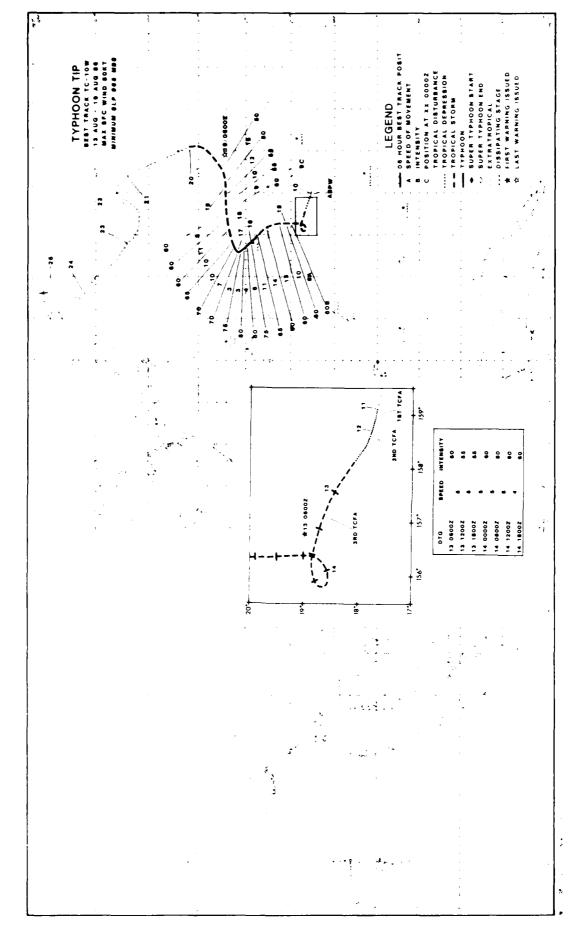

Typhoons deengette and Tip provided one of the more intriguing forecasting opportunities of the 1986 western North Pacific Tropica. Season for JTMC as they circled one another in a complex binary interaction. Georgette was a rare tropical cyclone which traveled from the eastern North Pacific region across the central region and became a typhoon in the western region (see Figure 3-10-1). During its two-week lifespan Georgette traveled nearly 5,000 nm (10,371 km).

Typhoon Georgette had an interesting early history. It began as a tropical disturbance in the eastern North Pacific 1,000 nm (2,903 km) south-southwest of Los Angeles on August 2nd and initially moved westward. The Naval Western Gearlography Center located in Pearl Harbor, Hawaii issued a Tropical Cyclone Formation Alert (TCFA) on the system at 020700Z after observing convective banks on satellite imagery. Later that same day, at 02000Z, the Eastern Pacific Hurricane Center (EPHC), located in San Francisco, issued the first advisory or Tropical Depression IE. The system was upgraded to Tropical Storm Georgette (IIE) on the fourth

advisory at 031500%, then downgraded to a tropical depression again on the fifth through seventh advisories when a decrease was noticed in the amount of convective organization. It was upgraded once more to a tropical storm on the eighth advisory and then finally downgraded for the last time and forecast to dissipate over water on the ninth advisory as it passed south of Hawaii. The Central Pacific Hurricane Center (CPHC) issued the sixth through ninth advisories after Georgette had moved into the central North Pacific. A total of nine advisories were issued on Georgette by EPHC and CPHC combined. All nine corresponding tropical cyclone warnings for the Department of Defense customers were issued by the Naval Western Oceanography Center.

Georgette maintained its identity as a tropical disturbance after the final downgrade and was tracked by JTWC before it crossed the dateline. It was first mentioned at 071500Z on the Significant Tropical Weather Advisory (ABPW PGTW) as a 20 kt (10 m/sec) disturbance 420 nm (778 km) southwest of Johnston Island. It crossed the dateline on 8 August while moving on a northwestward trajectory.

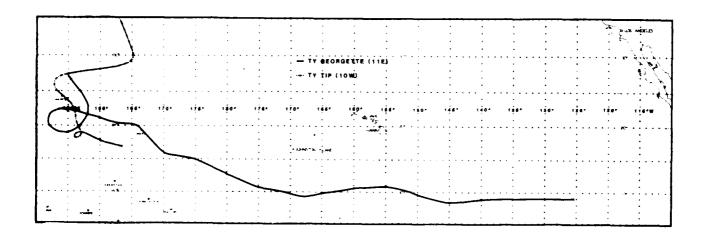


Figure 3-10-1 A composite plot of Tip's and Georgette's best tracks shows how closely linked the two were at the end of Georgette's long journey

CTWC issued a TUFA on regenerated Tropical Storm Jeorgette (IIE) at 3901302 based on analysis of satellite imagery which showed improved organization. A few nours later, JTWC followed with its first warning (#IC on the system), valid at 0900002, when Jeorgette re-developed a central dense overcast.

The aircraft recommaissance investigative mission into deorgette on 10 August at 00442 fiscovered winds of 45 kt (25 m/sec) and a minimum sea-level pressure (MSLP) of 990 mb. Georgette continued to develop over the next 18-hours reaching

minimal typhoon status by 1018002. Aircraft recommaissance confirmed this at 1021352, reporting estimated maximum surface winds of 65 kt (33 m/sec) and a MSLP of 973 mb.

Georgette remained a typhoon for 36-hours, slowed in forward speed, and reverted to a tropical storm again after 120000Z (see Figure 3-10-2). This was apparently due to the proximity of a Tropical Upper-Tropospheric Trough cell to the north and increased vertical shear.

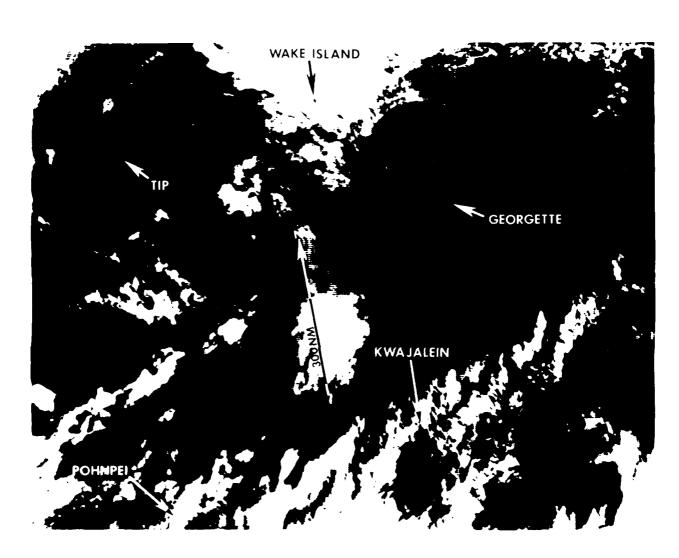


Figure 3-10-2 Georgette (to the east) was weakening as Tip was developing rapidly to its west (121059Z August DMSP infrared imagery)

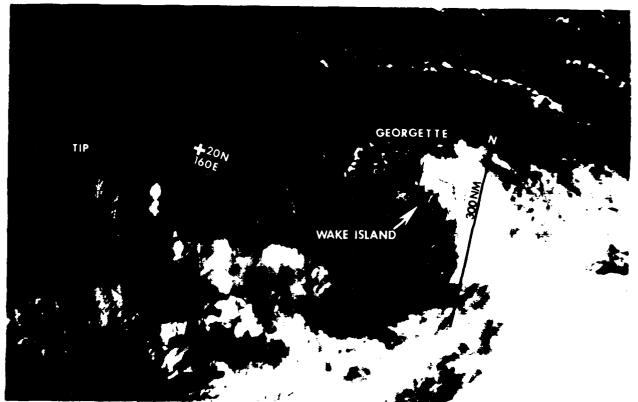


Figure 3-10-3. Georgette just after passing within 30 nm (56 km) to the north of Wake Island. Upper-level shear on the system from the west has exposed the

low-level center. Tip, located to the west-southwest of Georgette, was just a few hours away from the first warning (130358Z August DMSP visual imagery).

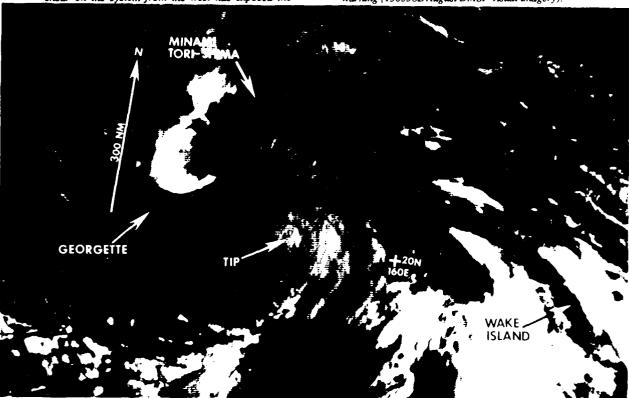


Figure 3-10-4 Tropical Storm Tip as it became the dominant system. Georgette was still a minimal tropical storm and its exposed low-level center was visible as it circled counterclockwise about Tip (142259Z August DMSP visual imagery)

* Professional making toward the wardness, toward successional mirectly for wave located early of the latter of a pigure policy. The wave located early of the latter which for pattern makes to the latter which for the reported by the latter of the laguet when latter of the latter o

The began early on 9 August as a tropical

disturbance located ho mm (403 km) southwest of Wake Island. The disturbance was praced on the ABPW PGIW by JTWC after it persisted for a day on satellite imagery. The first TCFA was issued at 110430Z on Tip based on an aircraft reconnaissance investigative mission that found a low-level circulation center with maximum winds of 20 to 40 kt (10 to 21 m/sec). The strongest winds were on the north side of the circulation associated with the maximum pressure gradient. The MSLP was 1001 mb.

The second TCFA was issued the next day (12 August) when aircraft recommaissance did not find a closed circulation center but only a broad surface pressure trough with a MSLP of 998 mb. No substantial winds were noted and the system appeared

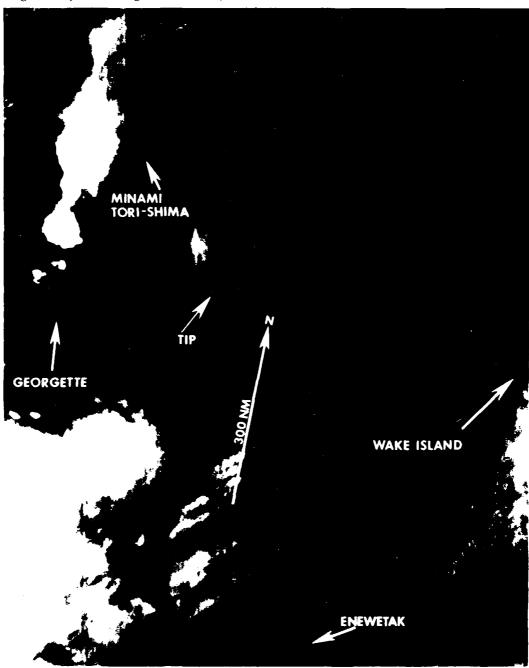


Figure 3-10-5. Tropical Depression 11E (Georgette) retains only its low level circulation. All the heavy conventive activity has become concentrated around Iropical Storm. Eq. (1803)67 August DMNP sisual materix.

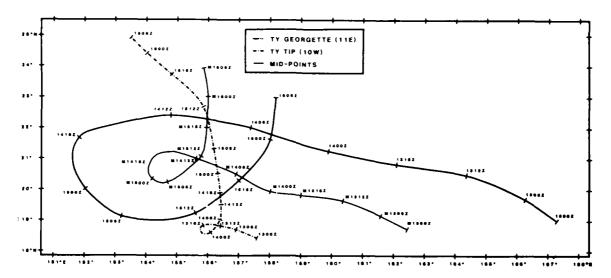


Figure 3-10-6. The binary interaction between Georgette and Tip. The plot of their respective best tracks and midpoints are shown between 130000Z and 100000Z August 1980.

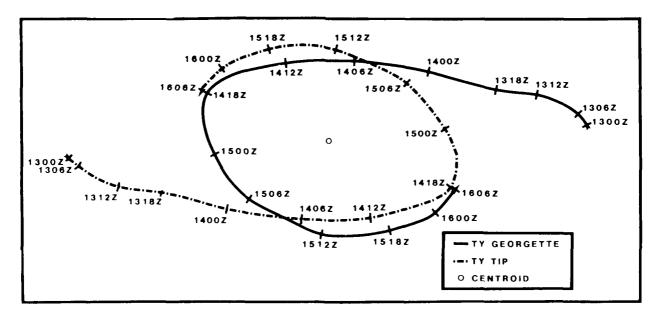


Figure 3.10-7. When the translational motion is removed from both Georgette and Tip, their distinctive center relative counterclockwise movement about the centroid of their midpoints becomes apparent.

to be quasi-stationary, perhaps due to its proximity to Georgette. $\label{eq:constraint}$

The third TCFA was issued on 13 August without new aircraft reconnaissance information due to the lack of available reconnaissance assets. Later, after an aircraft reconnaissance investigative mission found winds of 50 kt (26 m/sec) and a MSLP of 987 mb, JTWC issued its first warning on Tip, valid at 130600Z. The same aircraft also fixed Georgette 160 nm (296 km) northwest of Wake Island (see Figure 3-10-3). The two tropical cyclones were 450 nm (833 km) apart at this time. At 131800Z, they were only separated by 400 nm (741 km) and it appeared that Tip was capturing the low-level inflow of Georgette and was becoming more intense.

A binary interaction occurred between Georgette and Tip with Georgette tracking west-northwestward and circling around Tip in a counterclockwise motion (see Figure 3-10-6). Initially, Tip was moving very slowly in the same direction, but it eventually did a small counterclockwise loop. Tip benefited from

Georgette's passage to the north because it acted as a shield from the unfavorable upper-level shearing effect of the strong westerlies aloft. Removing the translational motion and plotting the relative motion of the two systems about the centroid of their midpoints (Figure 3-10-7) verifies the binary interaction as the pair circled one another in a broad elliptical path.

During the latter part of the binary interaction, as Tip was moving north-northwestward, it increased in intensity and in the process passed over Minami Tori Shima (formerly Marcus Island). At 160600Z, Tip peaked with 80 kt (41 m/sec), then turned to the right on the 17th and headed off toward the northeast (see Figure 3-10-8).

Tip transitioned to an extratropical cyclone on the 19th (see Figure 3-10-9) and eventually dissipated (4 days later) east of Japan. JTWC issued its final warning on the system at 1906002. No reports of damage or fatalities were received on these two tropical cyclones.

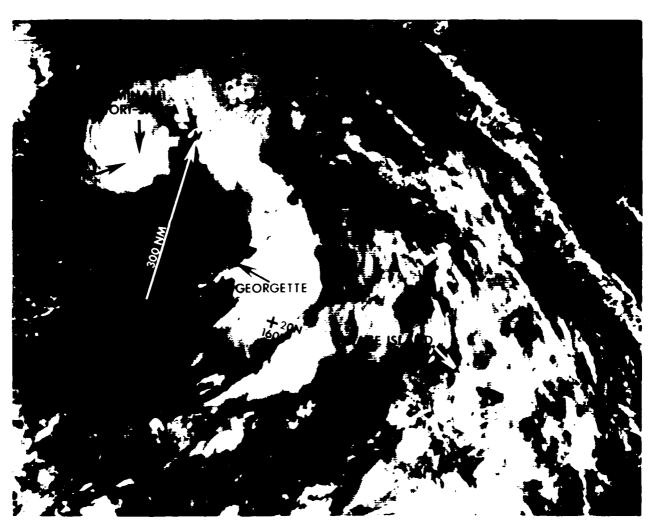


Figure 3-10.8.— Exphoin Tip passing within 30 nm (86 km) to the northeast of Minami Tori Shima (formerly Mareus Island) (182239Z DMSP visual imagery)


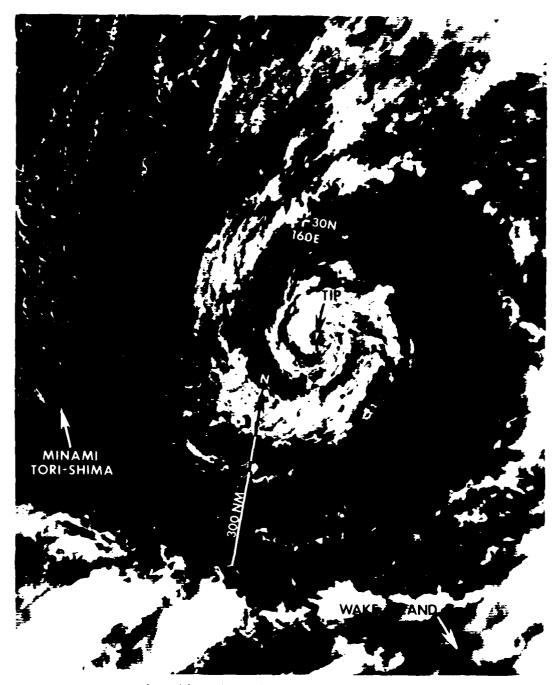


Figure 3-10.9 Tropical Storm Tip becoming extratropical Note the wrapping of the relatively clear area around the center and the ragged appearance of Tip's central convection (182/G8Z August DMSP visual imagery)

1. i.				
<u>.</u>	ERÀ 1	LEGEND OG HOUR BEST TRACK POSIT SPEED OF MOVEMENT INTERSITY POSITION AT XX 00002		
	TROPICAL STORM VERA ***********************************	LEGEND 06 HOUR BEST TRACK P. SPEED OF MOVEMENT INTENSITY POSITION AT XX 00002	TROPICAL DISTURBANCE TROPICAL SEGNE TYPHOON TYPHOON START SUPER TYPHOON START SUPER TYPHOON SED EXTRATROPICAL DISSIPATING STAGE FIRST WARNING ISSUED	
	TOR	ENT THE MOVES	DISTU DEPRE STORN HOON HOON IQ STA NING IS	
	PICAL STORM V BEST TRACK-11W 18 AUG - 17 AUG 80 MAX SFC WIND 40KT	LEGEND 06 HOUR BEST TRACK SPEED OF MOVEMENT INTENSITY POSITION AT XX 00000	TROPICAL DISTURBAN TROPICAL DEPRESSION TROPICAL STORM TYPHOON SUPER TYPHOON STAI SUPER TYPHOON STAI EXTRATROPICAL DISSIPATING STAGE FIRST WARNING ISSUE LAST WARNING ISSUE	
	OPC.	•		
	Ħ Ö	. 	• 0 * * * ;	
			· · · · · · · · · · · · · · · · · · ·	
			en e	
] · · · · · · · · · · · · · · · · · · ·	
			0 +	
			*	
's s			*	
	n (v.)	8 0	, <u>, , , , , , , , , , , , , , , , , , </u>	
		8 0 00	, ~	
		,	7. , , ,	1
		1.		
	1	E	<u>.</u>	
		•	# 2 8 5 F	
			•	
	•			
			•	
			ې	
			· · · · · · · · · · · · · · · · · · ·	
			:	
				ing the second of the second o
			**	
			٠ جر	t and t
			3	
			$\frac{1}{2} \left(\frac{1}{2} - \frac{1}{2} \right)$	
		,		
		•		and the second second

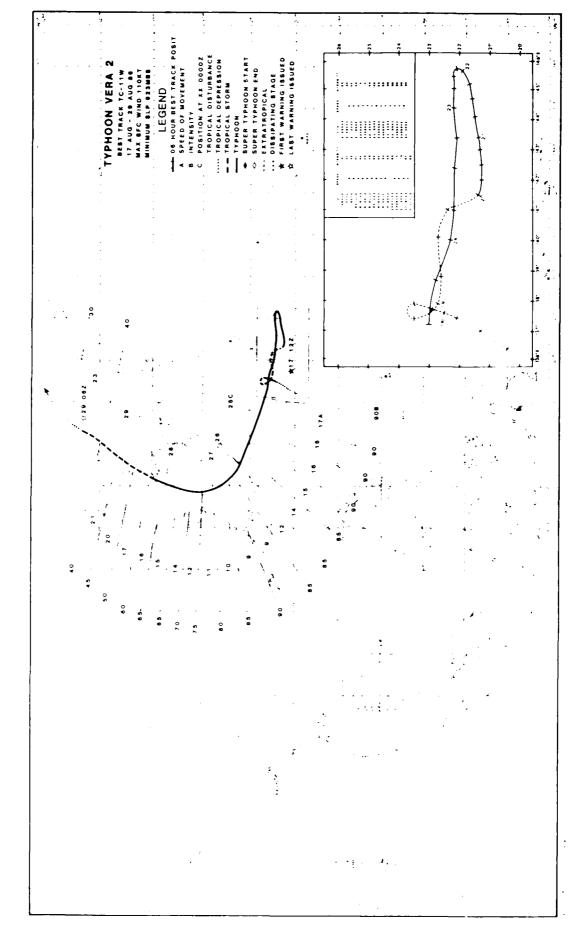

TYPHOON VERA (11W)

Typhoon Vera was another classic "monsoon depression" (see Tropical Storm Sarah (09W)) which formed in the most intense and extensive monsoon trough in the western North Pacific since 1974. Locating and forecasting the initial phases of Vera (from 14 to 18 August 1986) within this extensive trough presented unique problems for JTWC. Vera was relocated several times within the monsoon trough as the low-level flow attempted to stabilize around one circulation center. In post analysis, it was determined that Vera was actually two systems: the first (Vera #1) stabilized only briefly, reached tropical storm intensity then dissipated in the central Philippine Sea; the second (Vera #2) formed at the northeast periphery of the monsoon trough, over 360 nm (507 km) from Vera #1, developed slowly and reached typhoon intensity before crossing Okinawa and the Korean peninsula. The problems in locating

and forecasting Vera's low-level circulation benter were exacerbated by limited aircraft availability (due to other high priority missions for Wi-130 aircraft and multiple tasking problems with Typhoons Tip (10W) and Georgette (11E), sparse symoptic late and inconclusive satellite imagery.

Vera #1 developed on the neels of two typhoons, Tip (10W) and Georgette (11E). On 12 August, Georgette (11E) was moving west-northwestward and was located to the southeast of Wake Island. The onset of the intense and extensive morsoon trough associated with Georgette's inflow region was first noticed at that time, as southwesterly gradient winds of near 30 kt (15 m/sec) were observed at Yap (WMO 9143), Truk (WMO 91334) and Pohnper (WMO 91546). Georgette (11E) was positioned at the eastern end of this trough (Figure 3-11-1), which extended from the Philippine Islands to the duteline. The onset of the

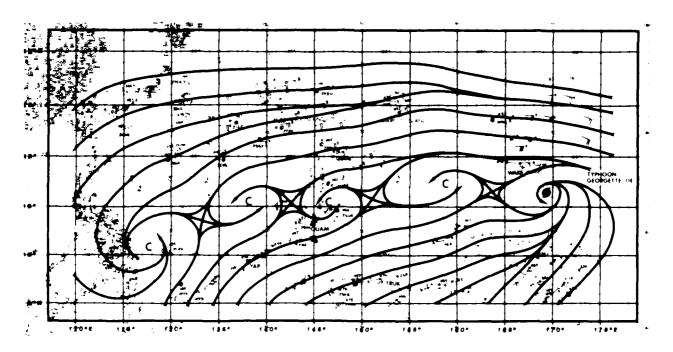


Figure 3-11.1. The surface gradient analysis at 1200007 August showed the onset of the intense monsoon trough extending from the Philippine Islands to the dateline Note the strong gradient wind reports at Yap (WMO 91334), and Pohnpei (WMO 91334).

monsoon trough was accompanied by an extensive cloud maximum in the Philippine Sea (Figure 3-11-2) where Vera #1 formed. An interesting feature of the trough was the unusually low pressures, which were evident along the axis of the trough between 12 and 15 August. These pressures ranged from 996 to 1006 mb.

By the end of the second week of August gale force westerly winds were present in the southern Philippine Sea and transitory light and variable circulation centers formed along the trough axis. Satellite imagery provided little help in locating any of these circulation centers in the wind field due to the transitory nature of the central convection. Consequently, the circulation that

eventually became Vera #1 was never mentioned on the Significant Tropical Weather Advisory (ABPW PCTW) as a suspect area, although several other areas in the monsoon trough were being reported on.

The first Tropical Cyclone Formation Alert (TCFA) was issued on 14 August at 00002. This was based on convection that had persisted for 12-hours and was colocated with an analyzed circulation center in the surface/gradient wind field. The TUFA was reissued at 150000Z, as satellite imagery indicated a slight increase in convective curvature. It appeared that the low-level flow was beginning to stabilize around an area located approximately 420 nm. (778 km.) south-southeast of Okinawa, Japan.



Figure 3.11.2. The area of intense convection that prompted the first TCFA on Vera #1. Note the extensive area of convection in the southwest monsoonal flow in the southern Philippine Sea (1321197 August DMSP vivual imagery)


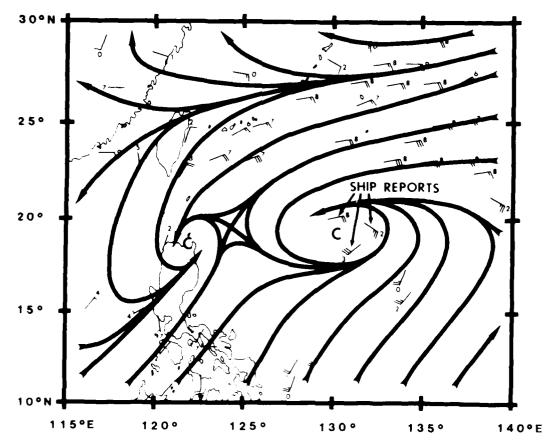


Figure 3-11-3. The 1512(0)Z August ship reports which prompted first warning on Vera #1 at 18/8002 August

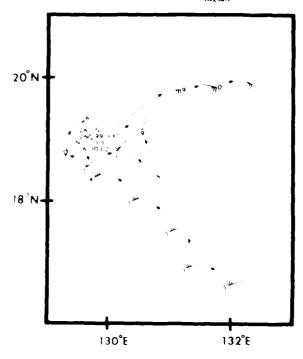

Parameter A. Ten Newson With Arright account the control of the control of the control of the Arra #1 file I. The control of t

At inlusting the first waiting was power moved for the first years. This warning was prospectly three Snip reports. Figure relies that white introductions of the scott of the A Lees Courant of Paragraph Courant Courant Mail Courant Wilder Courant Mail Courant C

Internative the person to the person of them in August August August at the formal of them in August August August at the first of the

An in the Contract of the Company of the Company of the Contract of the Contra

monsoon trough. The analysis (Figure 3-11-5) was 12-hours prior to the formation of Vera #2 that was (perhaps mistakenly) maintained as Vera after being relocated more than 360 nm (667 km) to the east-northeast. The satellite data prompted the first warning on Vera #2 at 171200Z. The dramatic relocation was verified at 18071bZ, when the first aircraft reconnaissance fix position in over 30-hours (Figure 3-11-7) confirmed the presence of the 50 kt (26 m/sec) system embedded in the monsoon trough.

The sudden and dramatic formation of Vera #3 caused many problems for the fleet customers as well as for the forecasters. In essence, Vera #1 had been forecast to move slowly toward the west-northwest for three days when the relocation occurred, placing the system 360 nm (667 km) to the east-northeast in a six hour period. Confusing and conflicting satellite imagery provided little insight into the location of the system during these stages. At 171200Z, Vera #2 was at tropical depression intensity and moving slowly northward. For the next three days, Vera #2 intensified slowly, moving erratically at first, and then slowly eastward within the monsoon trough. intense trough was again asserting its influence or. the system's track, as the remnants of Tip (10W) provided the "anchor" at the eastern end of the monsoonal flow. Vera #2 continued to move eastward with the monsoon west-southwesterlies until the 22md. when it slowed and began to track northward.

The symoptic situation governing Vera #2's movement began to change on the 21st, when a small surface ridge appeared to be building to the north of Vera #2. This ridge continued to build, helped perhaps by increasing upper-level convergence to the east-northeast of Vera #2, enhancing subsidence in the upper troposphere and ridging at the surface.

Between 220000Z and 221200Z, Vera #2 turned northward, and then westward, as the low-to maid-level ridge became firmly established to the north. The shift in the steering flow is evident in the change in the 700 mb Numerical Variational

Analysis (NVA) streamline analysis between 2200031 and 2212002 (Figures 3-11-d and 3-11-9). Apparently, the mid-level trough associated with the remnants of Tip (10W) had completely disappeared by 2212001 and was replaced by midging northeast of Vera #1. This midge provided the steering flow unit; Vera #1: recurvature on 1/ August. Vera #2 reashed its maximum intensity of 110 kt 32/ misecy and Midd d 923 mb or 21 August, just prior to timing westward toward Okinawa.

Vera #2 continued to move west-northwestward from the 22nd through the 20th, passing directly over the island of okinawa late on the 20th Bigard 5-11-10. The forecast had provided those on okinawa with ob-hours of warming before the closest point of approach of A courred. All aircraft and ships had been evacuated, or secured long before vers #2 hit with maximum sustained winds (over water of 55 kt (44 m/sec).

The recurvature and extratropical transition phase if Vers #z's track began on 25 August. Upon reaching the western periphery of the subtropical ridge, Vera #2's movement had slowed 'c + kt ../ km/nr, and turned northwestward at approximately 2505002. Vera #2 turned northward at about 2700002 and passed loo mm. 300 km. east of Changhai li-hours later. After passing east of Changhai, Vena 🎉 began to accelerate north-northeastward. By the 18th, the tropical cyclone had lost its connection with the low-level monsoonal westerlies and weakened to bo kt (31 m/sec). Figure 3-11-11 shows Vera #L just prior to landfall near Kunsan AF, Republic of Korea, with a large cirrus shield to the north of the exposed low-level sirculation, indicative of a tropica. cyclone transitioning into an extratropical system. Vera #2 cleaned the Konear peninsula at 2818001 with an intensity of only 45 kt 123 m/ger, and continued accelerating northeastward. It completes extratropical transition at 2900002 in the 34a of




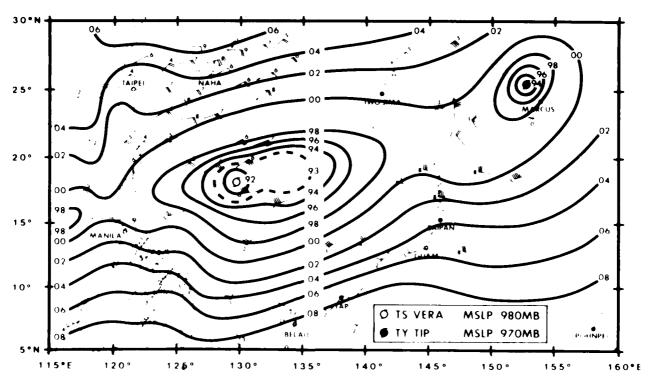


Figure 3-11.5. The surface gradient analysis at 1700002 (12 hours prior to the formation of Vera #2). Note the clongated trough to the east and west of Vera #1.

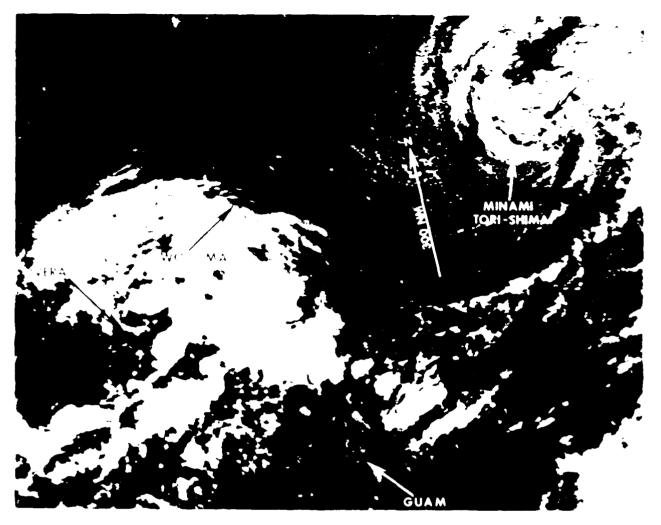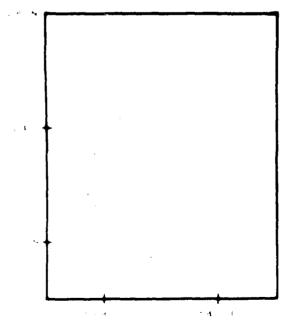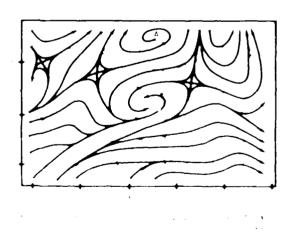

Time to Time and the surface of the





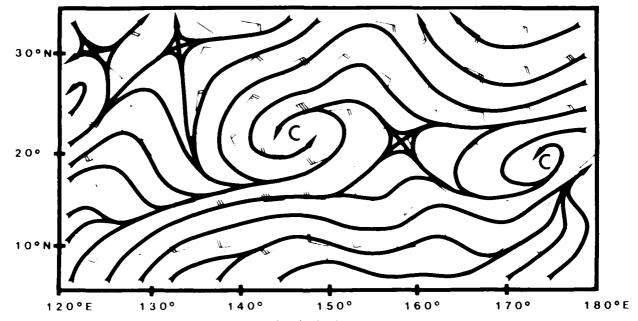


Figure 8 - 1 - Fine 22/25 of August 25 - in 6/84 A analysis sine wing a ridge sin place of the the agno2 hears earlier morth and northeast of Vera #2

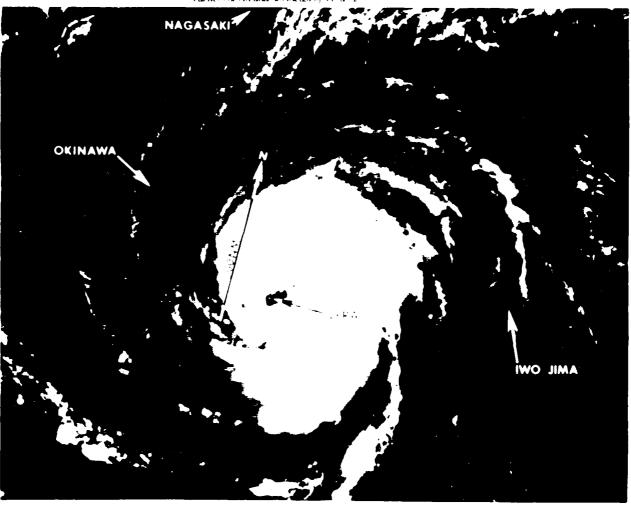


Figure 3.27.7. Aera #2 at typholon intensity as it approached Okinawa. 25 m/sv2 August DMSP civial magers.

In addition to the problems of finding and forecasting the initial low-level center, Vera #2 caused considerable damage and loss of life. It severely impacted civilian shipping and military operations at sea. Okinawa, in contrast, because of the early warning provided, experienced only slight lamage; mostly to power lines for private homes. One fisherman was killed. Kadena Ab recorded peak wind gusts of 54 kt (45 m/sec). High seas, however, placed several snips at sea in distress. In charginal, sever people were killed and 28 injured when lens #2 passed lod nm (296 km) east of the city. The New China News Agency (NCNA) reported more than to homes were destroyed and 5,000 emergency workers were recalled to restore electrical supplies and to ensure likes along the Huangpu river and the coast were secure. NCNA also reported that more than 3,000

vessels sought shelter as Vera #2 approached. On the Island of Cheju, 28 houses were destroyed, leaving 50 people homeless. In South Korea, six people were killed and over one million dollars worth of damage was reported. The most extensive damage to U.S. military facilities was reported at Taegu AB, where more than 75 trees were felled and power lines were downed. The roofs of several buildings were blown away.

In retrospect, Vera underscores the difficulty of positioning and forecasting tropical cyclones that form in strong monsoonal troughs. In addition, the eastward movement of Vera #2 for three days was an interesting anomaly that was perhaps influenced by the intense monsoon trough that extended throughout the entire western North Pacific for most of August.


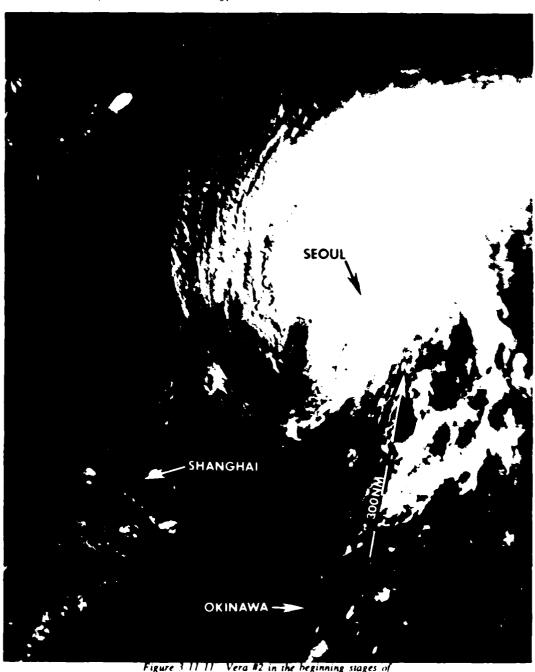


Figure 3.11.11" Vera #2 in the beginning stages of extratropical transition just prior to landfall near Kunsan AB. Republic of Korea (2806217 August NOAA visual imagery)

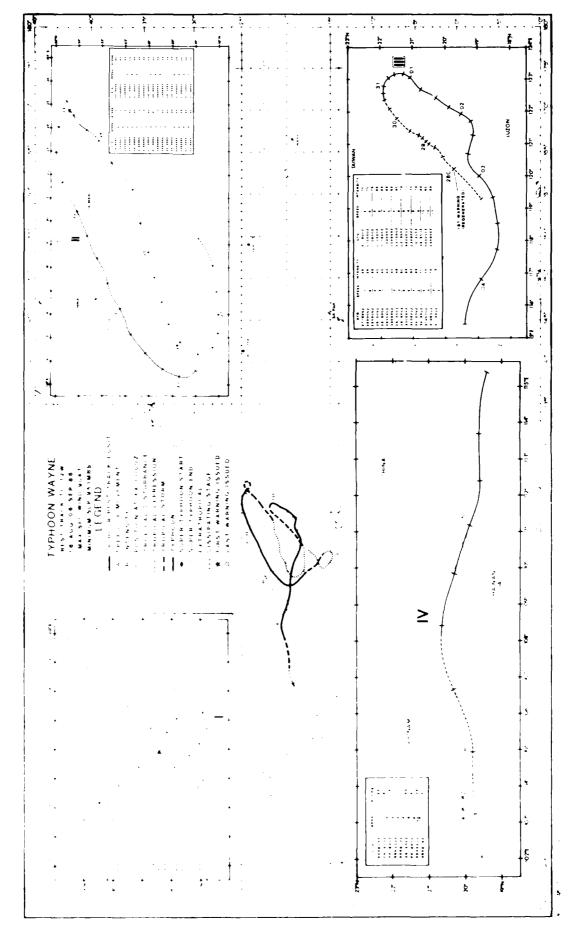

Typhoon Wayne was one of the longest-lived tropical cyclones in the 28-year history of the Joint lyphoon. Warning Center (JTWC). Wayne had more warnings (oT) issued on it than any other tropical cyclone of 1980. Another unusual fact concerning lyphoon Wayne was that it never fully emerged from the monsoon trough. Due to its highly hypical trick, Wayne caused significant forecasting problems for JTWC.

wayne was a small system that remained in the northern South China Sea and the western Philippine Sea throughout its entire life. Its best track throughout its entire life. Its best track throughout store loops and a figure eight. To further scomplicate matters, Wayne also dissipated and then regenerated while still over tropical waters.

During the middle of August, the monsoon trough was well established in the western North Pacific and the Jouth China Sea. Between 15 and 20 degrees North Latitude, it extended from central Vietnam eastward to Wake Island. Stronger than normal low-level westerlies equatorward of the trough axis were

characteristic of the monsoon trough throughout the month of August and into early September. North of the monsoon trough, the subtropical ridge was also well established.

On August 11th, a small area of persistent convection moved westward across the island of Euzon into the South China Soa. Synoptic data at 150000Z and 151200Z indicated a surface circulation with 20 kt (10 m/sec) winds and a minimum sea-level pressure (MSLP) of 1002 mb. These data prompted JTWC to reissue the Significant Thopical Weather Advisory (ASPW PGPW) at 152100Z. Over the next two to three days, the disturbance moved southwestward and increased in organization. Three Tropical Cyclone Formation Alerts (ICFAs) were issued at 0400Z on the loth, 17th and loth of August to advise customers of the good potential for development of a significant tropical cyclone in the area.

After receiving aircraft reconnaissance reports of 40 kt (21 m/sec) and a MSLP of 985 mb at 1807242 (Figure 3-12-1), the first warning was issued on

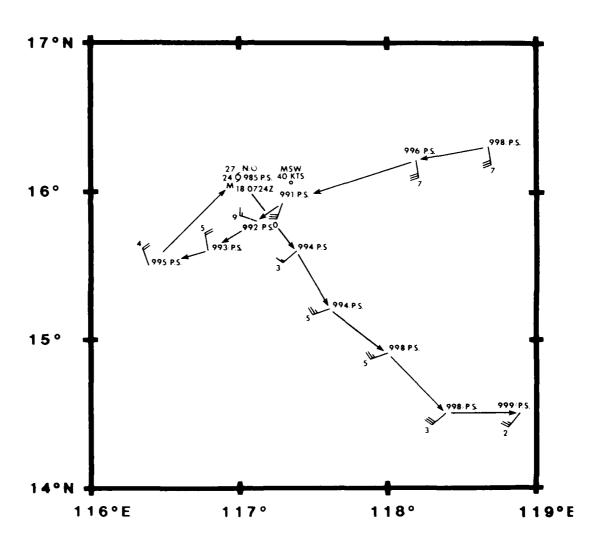


Figure 3-12-1. Aircraft reconnaissance investigative mission is ated maximum surface winds of 40 kt (21 m sec) and a minimum sea level pressure of 985 mb at 150-7247.

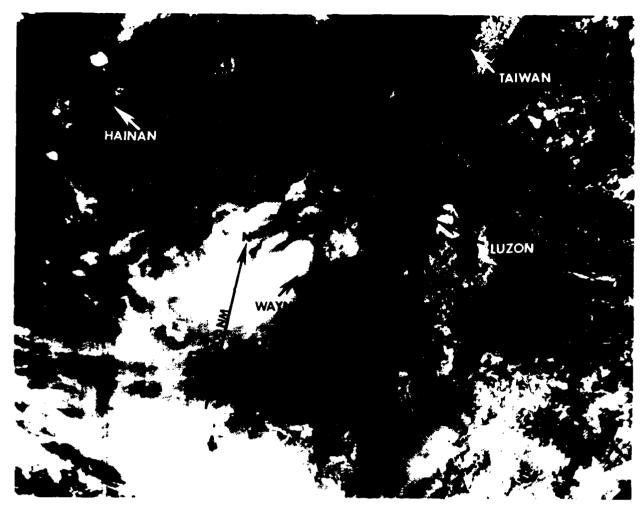


Figure 3-12-2. Wayne shortly before the aircraft reconnaissance mission (Figure 3-12-1) and first warning (180628Z August NOAA visual imagery).

Tropical Storm Wayne (Figure 3-12-2) valid at 1505 x.C.

Ner the next two days, the sympptic scale monsoon through snifted to the north about live Megness. Wayne responded by moving northwestward 180. Throughout this period of position that uniment, gradual sevel present brough Wayne to type for intensity at 19000000. Meanwrile, a weak

mid-latitude trough began to deepen and move eastward across mainland China toward the East China Sea. At 2000002, this trough, and associated front, extended across the Yellow Sea southward to the southeast of China. Also, at 2000002, Wayne assumed a northeastward track towards Hong Kong and the south coast of mainland China. Hong Kong's radar, at 2021042 210504H Hong Kong local time) digitally

digitally depicted the rainbands surrounding the eye (Figure 3-12-3) as Wayne passed to the south and east. Another view shows the eye of the typhoon as it was remotely sensed, five-hours later, 450 nm (833 km) from space (Figure 3-12-4). On 22 August, Typhoon Wayne moved northeastward across northern Taiwan and weakened to tropical storm intensity after interacting with Taiwan's rugged mountains. In the meantime, Typhoon Vera (11W) had become the dominant system in the Philippine Sea and began moving rapidly toward the west-northwest. On the 24th, Wayne had moved rapidly west-southwestward and through the Luzon Strait (for the first time) in response to the

northeasterly steering flow associated with the subtropical ridge. As Vera (11W) approached, Wayne decreased significantly in intensity and central convection. Increased vertical shear and subsidence associated with Vera (11W) stripped Wayne of its supporting central convection. As a result, only a small low-level exposed circulation center remained. A final warning on Wayne was issued at 2506002, but JTWC continued to monitor the disturbance for possible redevelopment.

As Vera (11W) moved northward (261200Z), the remains of Wayne became entrained in Vera's extensive low-level inflow and began to move east-northeastward

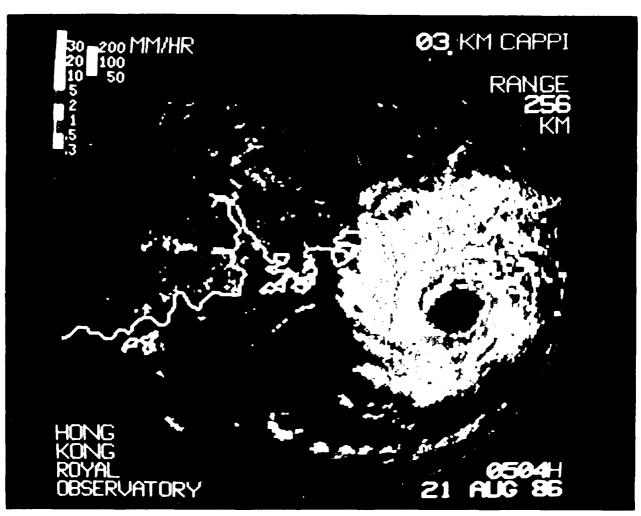


Figure 3-12-3. Digitized radar presentation of Typhoon Wayne at 202104Z (Photograph courtesy of the Hong Kong Royal Observatory).

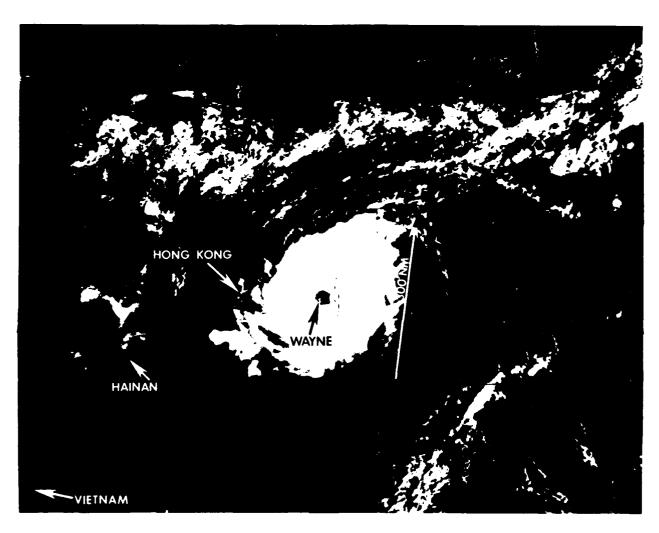


Figure 3-12-4. The eye of Typhoon Wayne. The band of cloudiness associated with the weak front, extending east-west and just to the north of the typhoon (210200Z August DMSP visual imagery).

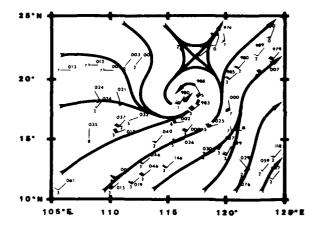


Figure 3-12-5. The 271200Z August 1986 Surface Synoptic Chart. Note the 30 kt (15 m/sec) and 40 kt (21 m/sec) ship reports associated with Wayne.


for the second time. The 271200Z surface analysis (Figure 3-12-5) showed a MSLP of 998 mb, 30 kt (15 m/sec) ship reports, and 40 kt (21 m/sec) ship reports - indications that Wayne had regenerated. These synoptic data, coupled with supporting satellite reconnaissance inputs, prompted JTWC to begin issuing warnings again on Tropical Storm Wayne at 280000Z. Wayne headed northeastward through the Luzon Strait for the second time.

By 31 August, low- to mid-level ridging built back across the East China Sea in Vera's (11W) wake. Wayne's movement toward the northeast slowed and changed toward the southwest - back through the Luzon Strait on the 2nd of September for the third time! After 301200Z, and until 051800Z, Wayne maintained typhoon intensity (Figure 3-12-6). Once through the strait, the typhoon accelerated westward. As it moved away from Luzon, Wayne reached its peak intensity of 90 kt (46 m/sec) at 040000Z. Wayne then moved south of Hong Kong, north of the island of Hainan and across the northern Gulf of Tonkin before dissipating over land over southern China. JTWC issued its final warming at 060600Z.

As a result of Typhoon Wayne, 52 people were reported killed and 97 people were reported injured in Taiwan. On Luzon, 19 people were reported killed and hundreds of people were reported injured. In Vietnam, dozens of people were reported killed in addition to the hundreds reported injured. In total, tens of thousands of people were left homeless and millions of dollars worth of damages were sustained to crops and property due to torrential rain induced flooding and high winds. In summary, Wayne was an extremely long-lived, complex, difficult to forecast "midget" typhoon that struck Taiwan twice, transited the Luzon Strait three times, caused extensive damage and loss of life, and proved to be one for the record books.




Figure 3-12-6. Wayne at typhoon intensity southeast of Taiwan as seen by the Hualien radar (WMO 46699) at 301200Z. August (Photograph courtesy of the Central Weather Bureau, Taipei, Taiwan).

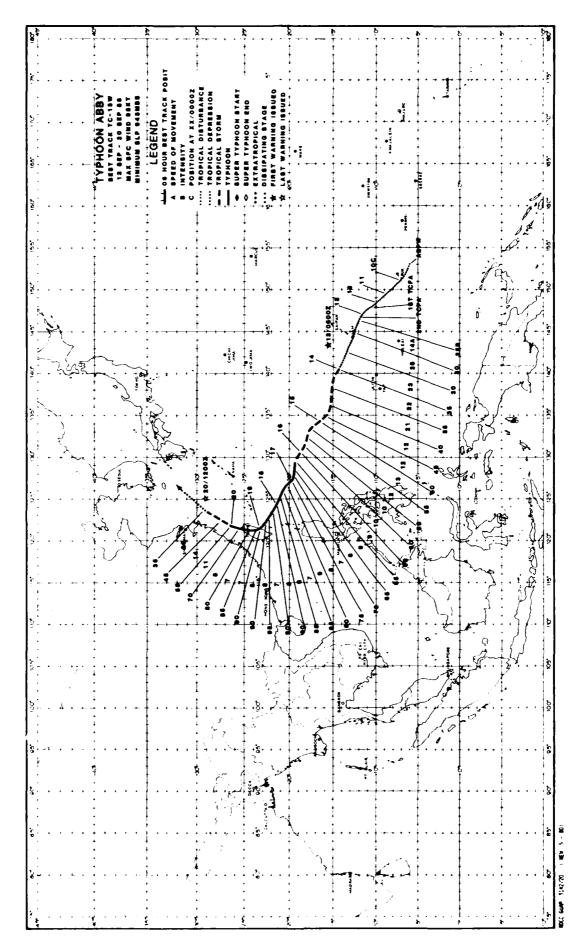

Typhoon Abby developed in low latitudes from a broad area of convection, moved northwestward and eventually recurved around the subtropical ridge. While in its formative stage, Abby gave indications that it might develop rapidly, however, it caused little, if any, damage when it passed within 30 nm (56 km) south—southwest of Guam. Later as a typhoon, it inflicted heavy damage and loss of life on the island of Taiwan.

During the end of August and beginning of September, the monsoon trough extended eastward from its normal position along 20 degrees North Latitude between 140 and 180 degrees East Longitude. This displacement, coupled with mean pressures two millibars below normal in the monsoon trough and higher than normal pressures to the south (in the Tasman Sea), resulted in stronger surface near-equatorial westerlies from New Guinea eastward into the Gilbert Islands. This increased low-level westerly flow, along with enhanced convection, raised the potential for tropical cyclone genesis within the monsoon trough. These factors, plus low vertical wind shear (Figure 3-13-1) associated with an area of persistent convection southwest of Truk, prompted mention on the 091930Z Significant Tropical Weather Advisory (ABPW PCTW). For three days this area of cloudiness continued to develop slowly as it drifted toward the northwest. Daylight aircraft reconnaissance on the 10th, 11th and 12th of September found only broad surface troughing, minimum sea-level pressures of 1006 mb and 20 to 25 kt (10 to 13 m/sec) surface winds.

09 SEPTEMBER 1200Z

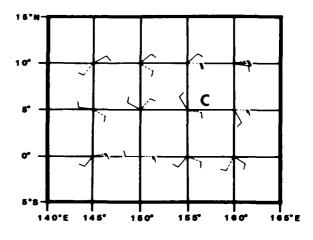

250mb NVA WINDS ----\ 925mb NVA WINDS ----\

Figure 3-13-1. Differences between the 925 mb and 250 mb NVA winds on 091200Z September define an area of low vertical wind shear favorable for tropical cyclogenesis. Solid lines indicate 925 mb winds; dashed lines indicate 250 mb winds.

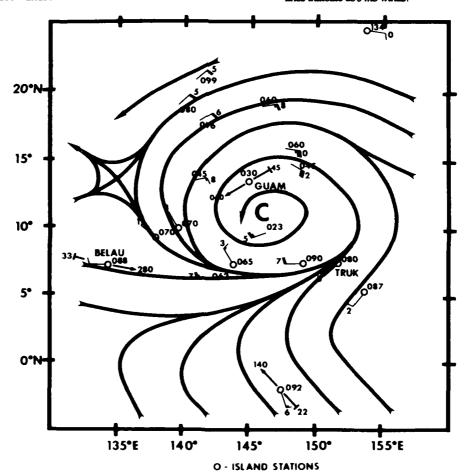


Figure 3-13-2. 130000Z September 1986 surface/ gradient-level streamline analysis showing synoptic reports which prompted the first warning on Typhoon Abby

The 130000% surface/gradient-level streamline analysis included one 35 kt (16 m/sec) snip report, one 33 kt (17 m/sec) snip report, one 33 kt (17 m/sec) gradient-level wind report and indicated that a minimum sea-level pressure of 100% mb was associated with the system (Figure 3-13-2). Based on this information, the first warning was issued at 1306002, which located Tropical Depression 13W 120 nm (222 km) southeast of Guam. During this early period, Abby was a large disturbance, which lacked a persistent sentral dense overcast (CDO) (Figure 3-13-3). Beginning at 140000%, however, Abby began to develop its CDO. Twelve to eighteen hours later, when the CDO feature became firmly established, Abby slowed its forward motion and intensified. As a point of interest, the band of maximum flight-level winds was displaced 70 to 120 nm (130 to 222 km) from the 700 mb center on 16 September (Figure 3-13-4).

Abby reached its maximum intensity of 95 kt (49 m/sec, at 1812002. Twelve hours later, it swept past

the east central portion of Paiwan (Figure 1915), with 90 kt (46 m/sec) surface winds and torrential rains. As a result, 13 people were killed; hop and property damage were estimated at 81 million dollars.

Typhoon Abby decreased significantly inintensity following its collision with Taiwan. The upper-level circulation traveled across the island while the low-level circulation moved up the island's east coast. Without the upper-level circulation and supporting convection, the low-level vortex weakened and accelerated toward the north-northeast. At 201200Z, the final warning was issued on Abby as it dissipated over the East China Sea.

In retrospect, as Abby approached Taiwan and recurved there were some data collection problems. Aircraft reconnaissance data to support warnings was limited due to reduced aircraft availability, the proximity of the no-fly line and the rugged Island topography. Determining the initial position of Abby was complicated as a result.



Figure 3-13-3. Tropical Depression 13W without a persistent central dense overcast (1305087. September NOAA visual imagery). The wavy lines in the imagery are due to temporary problems with the tactical sites processing equipment.

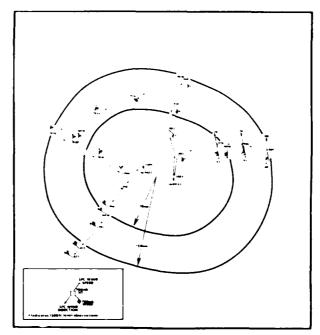


Figure 3-13-4. In-flight 700 mb winds from aircraft reconnaissance on 16 September 1986. Note the stronger winds are displaced outward from the center in a band by approximately 70 to 120 nm (130 to 222 km).


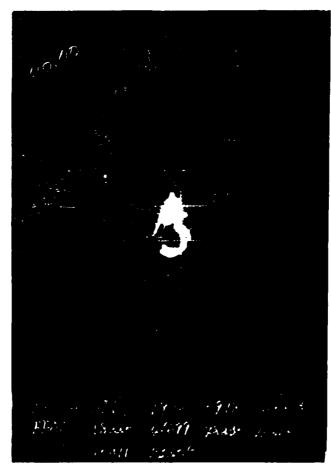


Figure 3-13-5. Radar view of Typhoon Abby as it approaches eastern Taiwan, 182300Z September (Hualien, Taiwan (WMO 46699)).

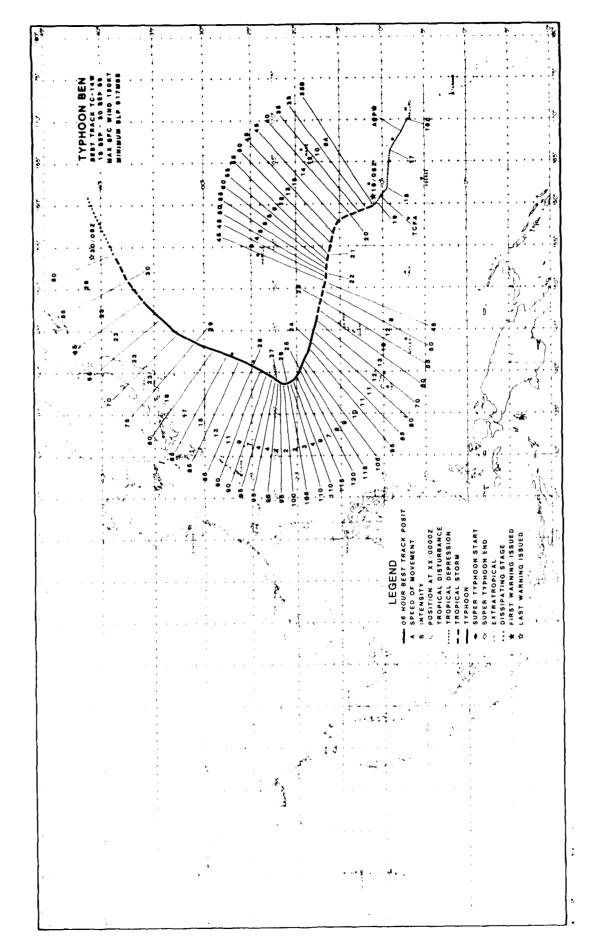

Typhoon Ben was the second of two tropical cyclones that reached warning status in the western North Pacific in September. Ben resulted in the loss at sea of thirteen fishermen from Saipan, who had sought shelter, as it passed by the island of Pagan in the northern Marianas. (The tragedy of the lost fishermen at Pagan was that, although the advanced warning was accurate, the captain apparently decided to leave Saipan for the northern islands anyway.) It was a long-lived typhoon with 46 warnings issued between the 19th and 30th of September.

Typhoon Ben developed from an area of enhanced convection on the 16th of September 165 nm (306 km) southeast of Kwajalein Atoll in the Marshall Islands. It was mentioned for the first time on the Significant Tropical Weather Advisory (ABPW PGTW) later that day. A Tropical Cyclone Forecast Alert was issued two days later, at 181830Z, after satellite imagery (Figures 3-14-1 and 3-14-2) indicated a rapid increase in the amount and organization of convection. The Dvorak intensity estimate was 35 kt (18 m/sec).

The first warming on Ben, as Tropical Depression 14W, was issued on the 19th, valid at 0000Z. Ben's

initial warming position, which was based on satellite data, was 180 nm (333 km) north of the island of Pohnpei. Later, aircraft recommaissance data at 1907307 resulted in a 160 nm (290 km) relocation of Ben to the northeast and upgrade from tropical depression to tropical storm intensity on the second warming.

Ben's initial forecast track was west-northwestward with a gradual intensity increase. The early forecast tracks were in close agreement with dynamical and statistical guidance. This made Ben an immediate threat to the island of Guam. However, Ben did not track as forecast, but instead moved north-northwestward until the 20th at 06002; after which it began a west-northwesterly track towards the northern Marianas.

Ben was forecast to reach typhoon intensity between 200600Z and 210000Z September. However, its forward movement slowed and its intensity decreased to 45 kt (23 m/sec) of maximum sustained surface winds. This decrease was due to increased vertical shear from the north-northeast. At 212124Z, the deep central convection became displaced southwestward and exposed the low-level circulation (Figure 3-14-3).

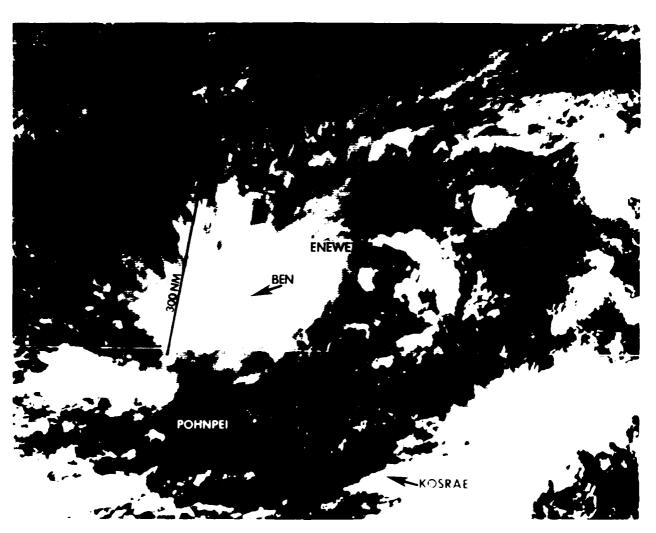


Figure 1974 A. Tiphion Ren as a transfer field where is a 125 March 1980 and PMSE and a sure of the field of

The central tense ivercast had reestablished itself by 1010000. By the 18th, ben had increased its forward speed toward the west-northwest and intensified. It reached typhoon intensity at 0,04000 past five hours before passing do nm 157 km2 south of Pagan Island (1004ted 070 nm 100 km north of duam). Ben continued to intensify through 2500000, when its maximum sustained whois peaked at 100 kt 100 m/sec. At that time, its minimum sea-level pressure (MSLP, was 407 mb. Ben had a olicular eye 40 nm (74 km) in diameter (Figure 3-14-4).

Forecasts through 2500002 indicated a gradual turn from northwestward to northward, however, Berslowed to 2 kt (4 km/hr) by early on the 26th and drifted slowly northward into a region of increasing upper-level southwesterlies. Once Ber moved to the north of the mid-level subtropical ridge axis, the forecasts, based on a combination of dynamic and

statistical albs for the track, were more accurate. As elemential, after resummation, was mandled well by the empirical Typologic Assertation Frequency. Description

As interaction with the scatewesteries as filtermeased, Ben's sentral eloudiness became religiated month-nontneast-south-southwest. At 15.4.7, almoraft recommaissance indicated that the eyeway, has become ragged and open to the southwest. The MULP had riser to 946 mb.

By 800002, Ben's forward speed has increased to

By '80000Z, ixen's forward speed hat increased to 13 kt (24 km/hr) and its intensity had gradually decreased to 85 kt (44 m/sec). The central convection sheared away and was displaced to the northeast as the intensity decreased to 50 kt (26 m/sec). By the time the final warning was issued at 300000Z, transition to an extratropical system was complete.

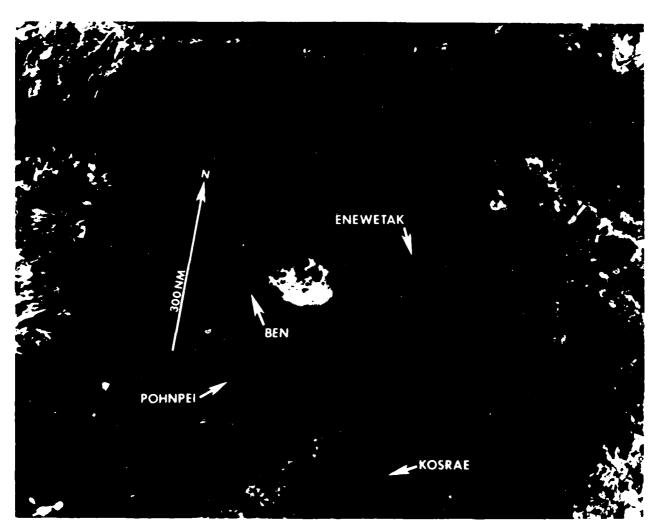


Figure 3.14.2. Enhanced intrared imagers of Ben-200 feeting of Ring the Great Council accounted to n 200 feeting and make IAM Programme for some

Figure 3-14-3 - Strong northerly upper level flow displaces convection to the south of Ben's low level circulation (212124Z September NOAA visual imagery)




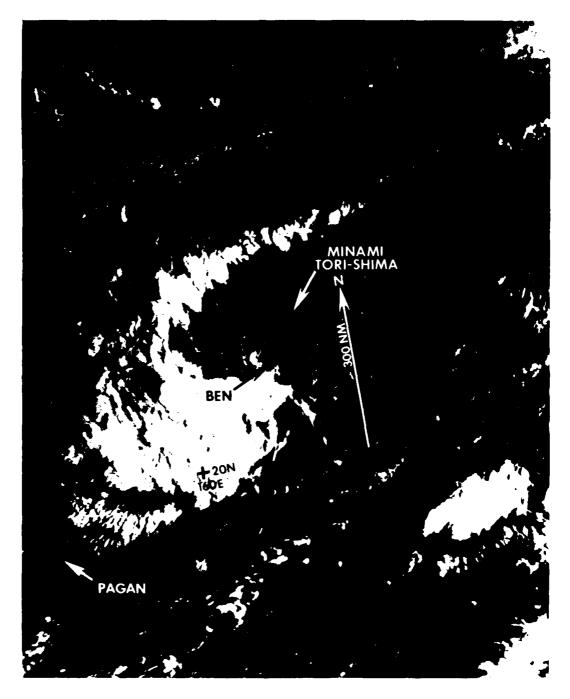




Figure 3-14.4. Two and one-half hours before Benreached its peak intensity of 120 kt (62 m/sec). A circular eve 40 nm (74 km) in diameter is visible (242/342 September DMSP visual imagery).

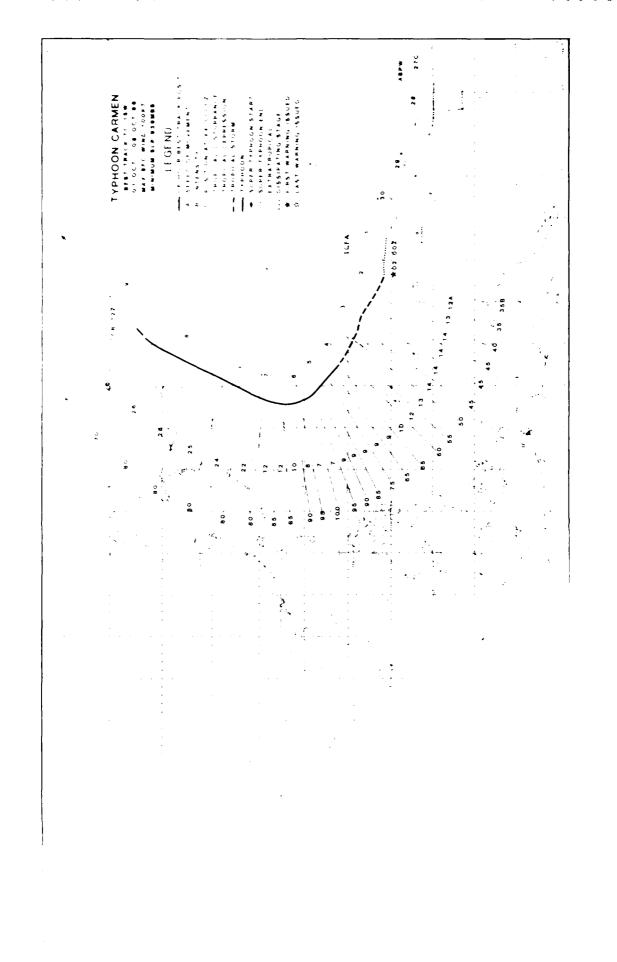

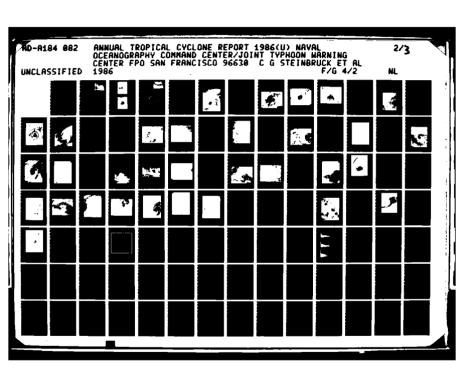



MICROCOPY RESOLUTION TEST CHART NATIONAL BUREAU OF STANDARDS 1963-A

Typhoon Carmen (15W) was the first of five significant tropical cyclones that occurred in October. Carmen followed a recurvature track that took the system between Guam and Saipan. Carmen was slow developing, but deepened rapidly prior to recurvature. The point of recurvature was 935 nm (1730 km) east of Taiwan. JTWC's forecast statistics were excellent.

Carmen spawned in an area of convergent flow associated with the near-equatorial trough east of the dateline. On 270600Z September, the disturbed area that became Carmen was first mentioned on the Significant Tropical Weather Advisory (ABPW PGTW) 350 nm (648 km) east of Majuro Atoll. The poorly organized convection was enhanced by divergent flow aloft. At 270000Z, when the surface vorticity center was first noted on satellite imagery, the minimum sea-level pressure (MSLP) was estimated to be 1009 mb, and the maximum surface winds 10 to 15 kt (5 to 8 m/sec). The tropical disturbance's organization remained poor for the next four days.

A Tropical Cyclone Formation Alert was issued on 011230Z October based on a flare-up of cloudiness detected on the satellite imagery. Because of the system's rapid development and location 330 nm (611 km) east-southeast of Guam, it presented an immediate threat to the island. The first warning for Tropical Depression 15W followed 11-hours later when satellite imagery showed continued growth. Later, aircraft reconnaissance at 020326Z fixed a low-level circulation center 480 nm (889 km) east of Guam, which was a significant displacement from the earlier satellite derived position. These data, which included a MSLP of 1001 mb, maximum 1500 ft (457 meters) winds of 45 kt (23 m/sec), and maximum surface winds of 40 kt (21 m/sec), led JTWC to relocate and upgrade Carmen to tropical storm intensity. Initially Carmen was forecast to pass south of Guam. It soon became evident that a track between the islands of Guam and Saipan was preferred.

	11Z	12Z	13Z
SAIPAN PGSN WMO 91232	G41 6	PK WND 31	PK WND 31
ROTA 60NM SW OF SAIPAN	PK WND 23	0 0 PK WND 18	PK WND 45
ANDERSEN PGUA WMO 91218	G37 044 6 PK WND 39	G49 055	G41 048
AGANA PGUM WMO 91212	G41 067 6 PK WND45	G42 071	G32 064 A PK WND 46

Figure 3-15-1 Synoptic data showing Carmen's passage between Saipan (WMO 91232) and the island of Rota, which is 60 nm (111 km) southwest of Saipan.



Figure 3-15-2. Winds and heavy rainshowers affect travelers on Guam on 3 October (Photo courtesy of Guam Publications, Inc.).

Carmen intensified at a slower rate than normal. This slow intensification was advantageous for the Mariana Islands. The maximum intensity at the time of passage through the Marianas was only 55 kt (28 m/sec) instead of an expected 77 kt (40 m/sec). The synoptic data (see Figure 3-15-1) reflects Carmen's presence between the islands of Rota, which is 60 nm (111 km) southwest of Saipan, and Saipan (WMO 91232) at 031200Z. Automated weather reporting stations provided the timely observations from Rota and Saipan. Maximum wind reports from Saipan were 31 kt (16 m/sec) with gusts to 41 kt (21 m/sec) at 0312002; for Rota, 35 kt (18 m/sec) with gusts to 53 kt (27 m/sec) at 031500Z; and for Guam (Figure 3-15-2), 30 kt (15 m/sec) with gusts to 40 kt (21 m/sec) at Carmen did bring heavy rain, 10 to 11 031155Z. inches (254 to 279 mm) for Guam, and flooding to the southern Mariana Islands, but caused little structural damage and no loss of life.

Aircraft reconnaissance at 032350Z, which reported a MSLP of 993 mb and estimated the maximum surface wind to be 65 to 70 kt (33 to 36 m/sec), led JTWC to upgrade Carmen from tropical storm to typhoon. Aircraft reconnaissance at 042355Z reported a drop in MSLP of 26 mb to 967 mb and at 051510Z reported another drop of 28 mb to a MSLP of 939 mb. This was a total decrease of 54 mb or an average of 1.4 mb/hr for 39-hours (see Figures 3-15-3, 3-15-4 and 3-15-5).

The forecasts for the recurvature of Carmen were excellent. The 72-hour forecast errors covering eight warmings (the third warming through the tenth) were less than 80 nm (148 km). One of the pieces of data that helped was a synoptic track requested and flown on 03 October from 0000Z to 1500Z. This synoptic track (see Figure 3-15-6) revealed a weakness at 500 mb in the subtropical ridge 480 nm (889 km) northwest of Guam.

Typhoon Carmen reached its maximum intensity of 100 kt (51 m/sec) with gusts to 125 kt (64 m/sec) at 051800Z. Afterward, cooler, drier air associated with a mid-latitude trough east of Japan, was entrained into the system. The aircraft mission at 052306Z reported that the eyewall had become ragged in the south through northwest segment. Satellite imagery at 061200Z confirmed Carmen was being sheared from the west by strong upper-level southwesterly flow, which caused the tropical cyclone to become elongated southwest to northeast. By that time,



Figure 3-15-3. Typhoon Carmen before rapid deepening and just after it passed Guam (040444Z October NOAA visual imagery).



Figure 3-15-4. A matu.: Typhoon Carmen 19-hours after Figure 3-15-3 and rapid deepening (050013Z October DMSP visual imagery).

Carmen had already passed its point of recurvature. At 070005Z, the aircraft reconnaissance reported moderate to severe turbulence in the northwest quadrant of the system and indicated the eye was no longer present. These were indicators of extratropical transition.

Subsequently, Typhoon Carmen accelerated in forward speed to about 25 kt (13 m/sec), while maintaining an intensity of 80 kt (41 m/sec). After recurvature on October 7th, the MSLP steadily decreased and the winds remained nearly constant. At 071600Z, satellite imagery indicated Carmen had acquired subtropical characteristics and the maximum winds were 65 kt (34 m/sec). A wind maximum on the eastern portion of the trough caused Carmen to accelerate toward the northeast faster than forecast.

JTWC continued warning on Carmen until 0812002 when the system completed extratropical transition. At that time, extratropical Carmen had 60 kt (31 m/sec) maximum winds with gusts to 75 kt (39 m/sec) and was well north of the tropics.



Figure 3-15-5. Inside Typhoon Carmen's eye. This scene is from the aircraft reconnaissance mission (AF966 0715 CARMEN) at 042355Z. Compare the low cloud spiral in this figure with the remotely sensed eye in Figure 3-15-4 (Photo courtesy of Captain Susan K. Watters, USAF).


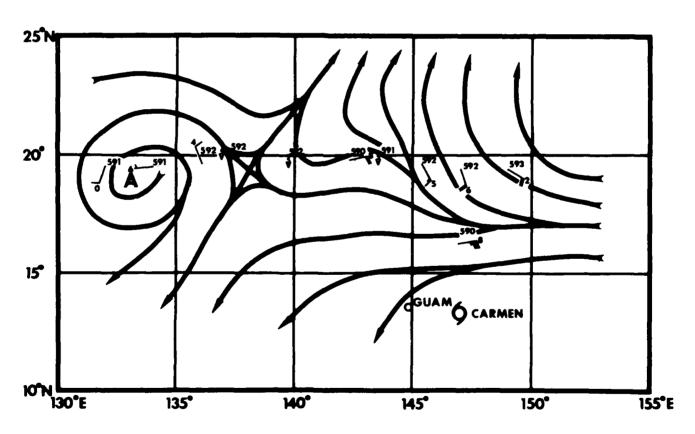



Figure 3-15-6. The synoptic track from 030000Z to 031500Z October 1986 identifies a break in the subtropical ridge.



TROPICAL STORM DOM (16W)

Figure 3-16-1. Tropical Storm Dom slowly developed from a tropical disturbance 340 nm (630 km) east of the island of Samar in the Republic of the Philippines. It was first detected on satellite imagery on the 2nd of October and placed on the Significant Tropical Weather Advisory (ABPW PGTW) as a suspect area the same day. Dom struggled along for the next six days as it moved west-northwestward across southern Luzon producing heavy rains and flooding. The flood damage prompted the Philippine Meteorological Agency to begin warning on the system prior to ITWC. ITWC issued a Tropical Cyclone Formation Alert at 081800Z when Dom displayed increased organization and convection after entering the South China Sea. Surface winds at that time were estimated at 15 to 25 kt (7 to 12 m/sec). Dom was upgraded to tropical storm intensity on the first warning at 090300Z. The warning was based on aircraft reconnaissance reports of 50 kt (26 m/sec) estimated maximum surface winds and a minimum sea-level pressure of 1002 mb. A well-established ridge located north of Dom provided strong mid- to upper-level northeasterly flow caused Dom's convection to be sheared to the west-southwest of the low-level circulation center. Later, this shear, when combined with the increasing interaction with the rugged terrain of central Vietnam, caused Dom to weaken and dissipate. The last warning on Dom was issued by JTWC for 111200Z. The satellite picture shows Dom just prior to the issuance of the first warning (090215Z October DMSP visual imagery).

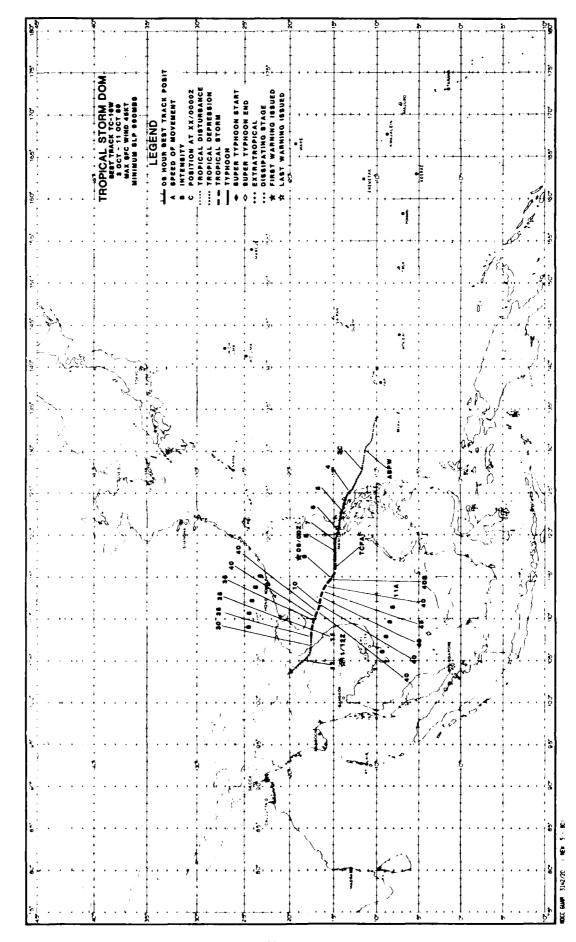

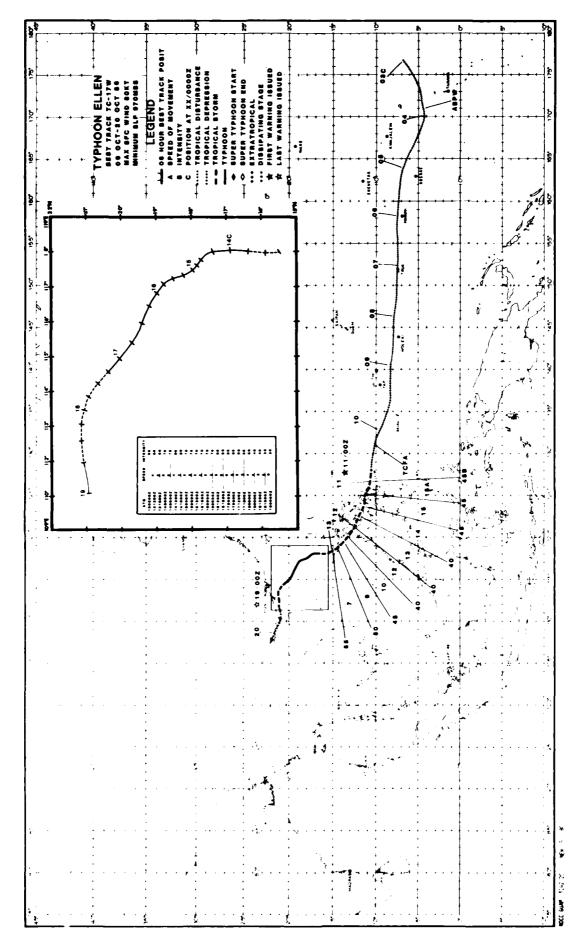

Typhcon Ellen was the third cyclone of five that developed in the month of October. It followed close on the heels of Typhcon Carmen (15W) and Tropical Storm Dom (16W). Ellen proved to be a difficult system to forecast, particularly when it encountered weak steering in the South China Sea. The system traveled over 4000 nm (7408 km) from its inception on the 3rd of October 250 nm (463 km) east of the Majuro Atoll in the Marshall Islands to dissipation sixteen days later along the border of southern China and Vietnam.

As Ellen moved westward through the Marshalls, the Significant Tropical Weather Advisory (ABPW POTW) was reissued late on the 3rd of October, at 18002. The disturbance in the monsoon trough had shown signs of improved convective organization on the ratellite imagery.

Ellen finally developed into a tropical depression as it passed 120 nm (222 km) south of the island of Ulithi in the Caroline Islands on 9 October. Twenty-four hours later, JTWC issued a Tropical Cyclone Formation Alert when the disturbance

again showed an increase in organization. The initial aircraft reconnaissance investigative mission found only a weak circulation in a broad low-pressure trough and estimated surface winds of 10 to 20 kt (5 to 10 m/sec).

By the following morning, Ellen had changed significantly. The second aircraft reconnaissance mission at 1101222 reported a minimum sea-level pressure of 992 mb with estimated surface winds of 45 kt (23 m/sec). JTWC immediately issued its first warning on Tropical Storm Ellen, valid at 1100002 (see Figure 3-17-1).

Shortly after its development into a tropical storm, Ellen moved through the the central Philippine Islands. Only a modest weakening to $40~\rm kt$ (21 m/sec) resulted during the 24-hours it took to make the passage.

Upon entering the South China Sea on the morning of the 12th, Ellen turned northward into a region of weak steering current and slowed in forward speed. At that point, most of the statistical and dynamic forecast guidance predicted the tropical cyclone

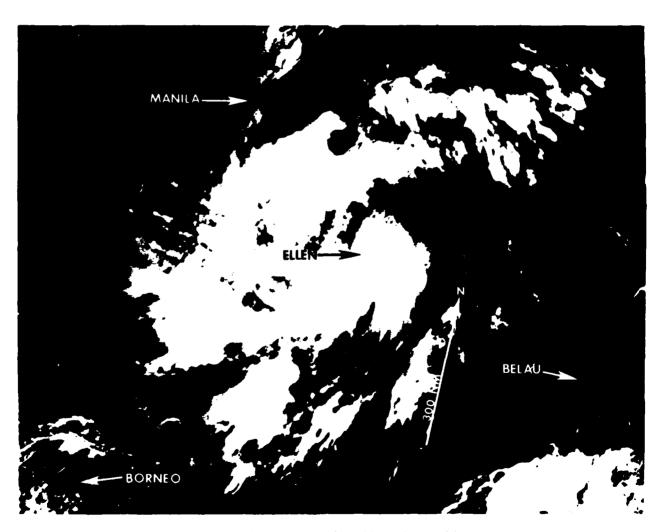


Figure 3-17-1. Tropical Storm Ellen at the time of the second aircraft reconnaissance mission that found 45 kt (23 m/sec) surface winds and a minimum sea-level pressure of 992 mb (110134Z October DMSP visual imagery).

would recurve. This was the forecast philosophy that was followed. Later the One-way Interactive Tropical Cyclone Model (OTCM) changed to a more northwesterly, and eventually, westerly track. JTWC stayed with the recurvature forecast until the 16th when the Typhoon made a definite turn toward the west. Aircraft reconnaissance data provided this critical information. The three hourly movement between the intermediate and on-time vortex fix positions confirmed that Ellen was headed northwest and not northeast. In retrospect, the low-level surge from the northeast across the Yellow Sea, Taiwan, and

later, the south coast of China pressured Ellen northwestward.

After reaching a peak intensity of 80 kt (41 m/sec) on the 14th (Figure 3-17-2), the vertical shear from the westerlies remained too weak to shear away the central convection and Ellen maintained tropical storm intensity almost until landfall northeast of the island of Hainan. Figure 3-11-3 provides a radar view of the rainbands as the system passed south of Hong Kong on the 18th. There were no reports received of heavy damage or loss of life attributed to Ellen.

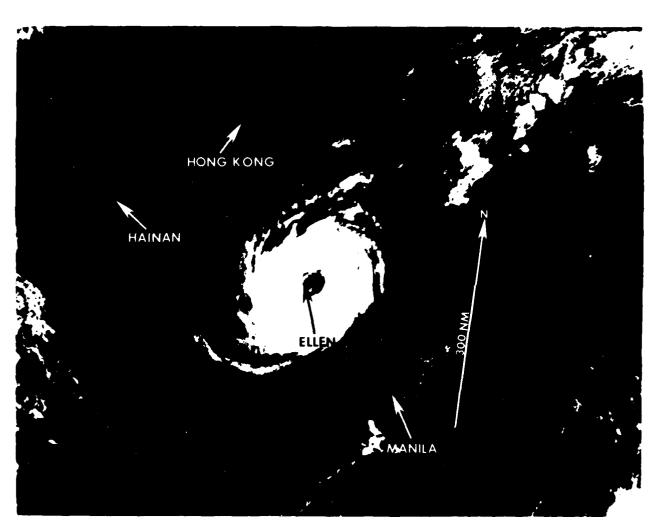


Figure 3-17-2. Weak vertical wind shear over the South China Sea enabled Ellen to intensify into a typhoon. Its large eye is visible to the west of the island of Luzon (150153Z October DMSP visual imagery).


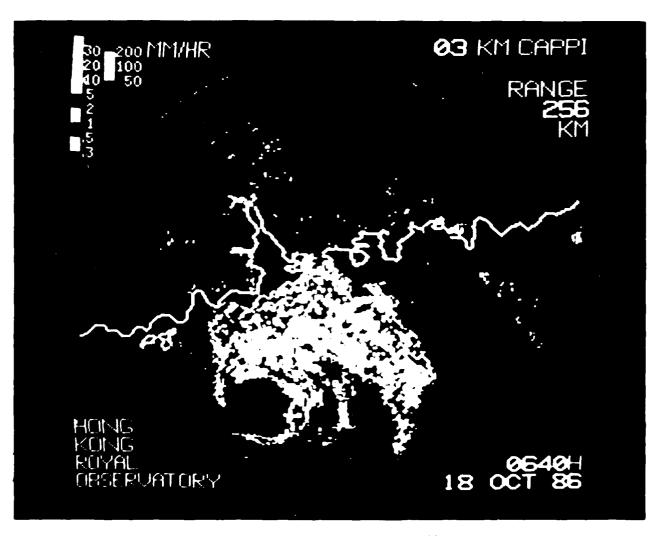


Figure 3-17-3. A digital radar picture of Tropical Storm Ellen as it passed south of Hong Kong on the 18th of October at 0640Z (Picture provided coursesy of the Hong Kong Royal Observatory).

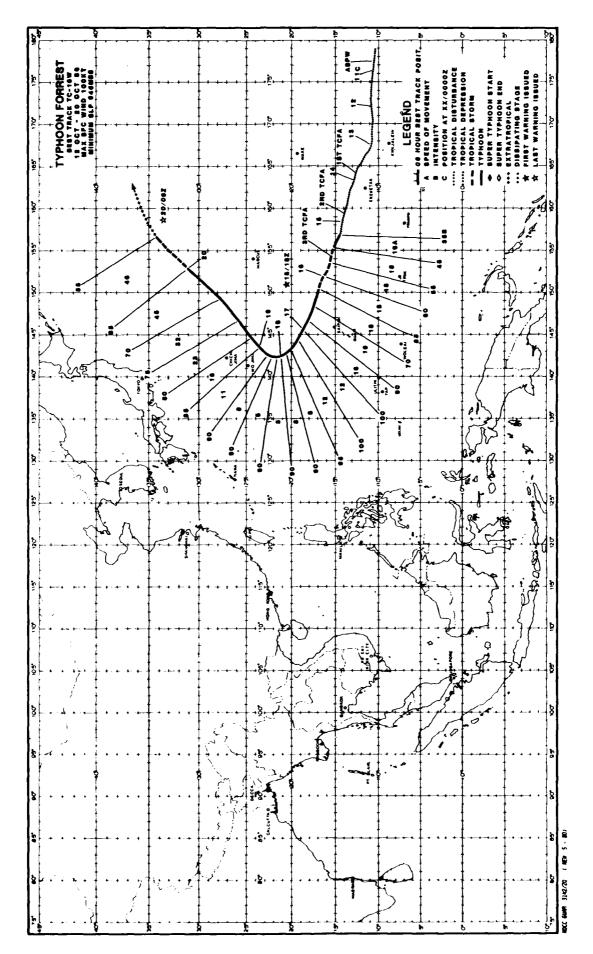

Typhoon Forrest was the second tropical cyclone to begin east of the dateline and move westward into the western North Pacific. Forrest was a classic recurver and a small, compact system. The track and intensities were well forecast with the exception of the intensities being a little low through the first half of Forrest's life. An interesting point to note about this system is that the upper-level vortex appeared to develop first and then built downward to the surface. Post-analysis of synoptic and aircraft reconnaissance data indicates the stronger upper- and mid-level winds did not begin to reach the surface until after the 14th of October.

On 9 October, personnel at Detachment 1, 1st Weather Wing, Satellite Operations first detected Forrest on satellite imagery as an area of poorly organized convection in the trade wind trough 600 nm (1111 km) east of the Marshall Islands. Over the next 18-hours the convection began to slowly increase in organization. Once across the dateline, it was first discussed on the Significant Tropical Weather Advisory (ABPW POTW) at 100600Z. At that stage, the amount of convection began to decrease, but a small cyclonic vorticity center remained. Over the next 48-hours, Forrest remained in a region where the upper-level environment was unfavorable for

development. As a result, it remained poorly organized and continued moving west-northwestward. Sparse synoptic data indicated the minimum sea-level pressure (MSLP) was approximately 1008 mb and the maximum sustained surface winds were 10 to 20 kt (5 to 10 m/sec).

The orientation of low-level clouds on the visual satellite imagery at 120000Z revealed a broad circulation center in the western quadrant of deep convection located 320 nm (593 km) east of the Bikini Atoll in the Marshall Island Group. The intensity was estimated to be 25 kt (13 m/sec). Later, at 121800Z, Forrest demonstrated continued growth. prompted reissuance of the ABPW POTW at 122000Z to upgrade Forrest's potential for development to fair. This trend towards increased organization (Figure 3-18-1) continued and resulted in a Tropical Cyclone Formation Alert (TOFA) at 132000Z. The first aircraft reconnaissance investigative mission flown into the disturbance on the 14th of October found multiple low-level circulation centers, a MSLP of 1008 mb, maximum winds of 10 to 25 kt (5 to 13 m/sec) near the vortices and 30 kt (15 m/sec) displaced to the north. The TCFA was reissued at 142000Z, since supporting data did not, as yet, necessitate a



Figure 3-18-1. Typhoon Forrest organizing over the Marshall Islands (122311Z October DMSP visual imagery).

Aircraft reconnaissance on the 15th found a single circulation center; the MSLP had dropped to 1002 mb and maximum winds were 25 kt (13 m/sec). The (Dvorak) satellite intensity estimate at 151600Z of 45 kt (23 m/sec) prompted the first warning. warning at 151800Z for Tropical Depression however, only mentioned maximum sustained winds of 30 kt (15 m/sec). The lower intensity on the warning was caused by the Typhoon Duty Officer placing more weight on the earlier aircraft reconnaissance information than the Dvorak analysis of infrared satellite imagery. Subsequent aircraft imagery. reconnaissance at 152126Z, however, proved otherwise. They reported maximum winds to be 55 kt (28 m/sec) with a MSLP of 988 mb and a closed, but thin, eyewall. At 1600092, the aircraft observed 80 kt (41 m/sec). Figure 3-18-2 shows the stronger winds in the north semicircle of Forrest indicative of the tighter pressure gradient between the low pressure center and the subtropical ridge. The 160000Z warning upgraded Forrest from tropical depression to

typhoon intensity with maximum sustained surface winds of 65 kt (33 m/sec). In retrospect, the initial warning was too conservative and the forecasters had waited too long for the aircraft reconnaissance to confirm the strong development indicated by the satellite data.

While moving northwestward at 16 to 18 kt (30 to 33 km/hr) over the next 24-hours, Forrest rapidly deepened. Nighttime aircraft reconnaissance on the 16th indicated Forrest had continued to deepen rapidly as the 700 mb heights fell 70 meters in less than three hours. Dvorak intensity estimate on satellite imagery at 161600Z indicated Forrest contained winds of 102 kt (53 m/sec). By 162105Z the 700 mb heights had dropped by 219 meters from 2840 meters to 2621 meters. The MSLP was 946 mb. Satellite imagery and aircraft intensities were in agreement, that Forrest had deepened rapidly over a very short time period. Forrest peaked at its maximum intensity of 100 kt (51 m/sec) at 170000Z (Figure 3-18-3). Two hours before this peak

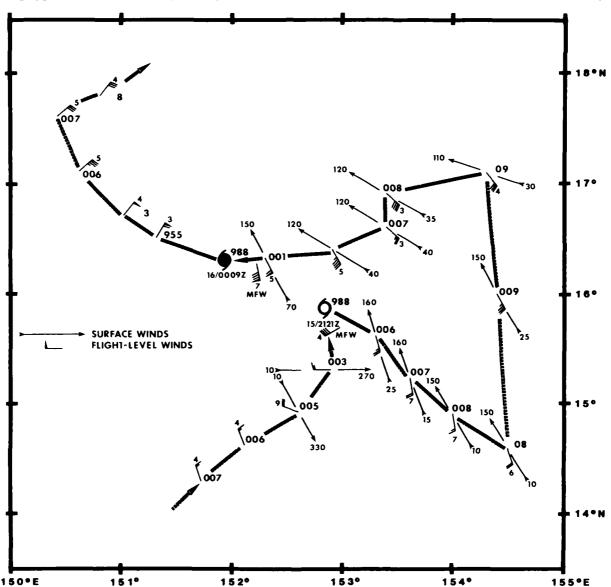


Figure 3-18-2. Plot of aircraft reconnaissance date from 152126Z to 160009Z October showing higher wind speeds to the north and east of the cyclone center. "MFW" represents the maximum observed flight-level winds and "MSW" represents the maximum observed surface winds.

Figure 3-18-3. Typhoon Forrest at maximum intensity of 100 kt (51 m/sec) with a small eye. With the sun low in the east, the cloud top topography is striking (162029Z October DMSP visual imagery).


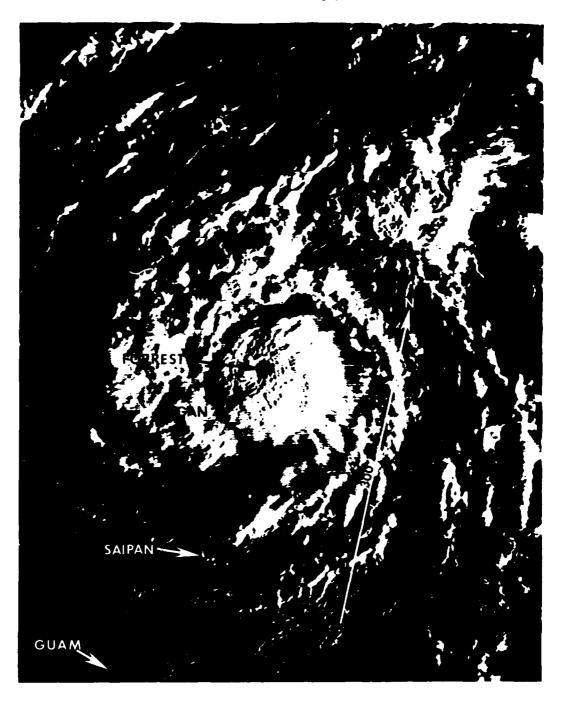


Figure 3-18-4. The thin cirrus clouds in the west semicircle indicate the beginning of the end for Forrest as it was becoming influenced by the stronger mid-to upper-level westerly flow. A short time later, Forrest began to move rapidly northeastward (180536Z October NOAA infrared imagery).

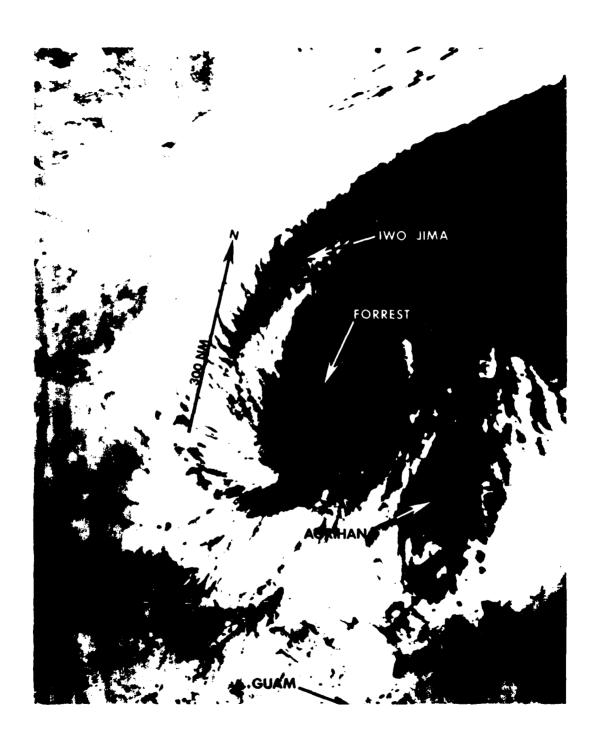


intensity, the island of Agrihan (located in the northern Marianas 270 nm (500 km) north of Guam) bore the brunt of Typhoon Forrest as it passed 10 nm (19 km) to the south. Fortunately, the island's 25 residents received no injuries even though only one building was left standing and two-way communications were destroyed. On the 21st of October, the Navy and Coast Guard joined forces and airlifted 1000 pounds of canned food, medical supplies and a two-way radio to the islanders.

At maximum intensity and just prior to recurvature, Forrest started elongating southwest to northeast and slowed to 5 kt (9 km/hr). JTWC had been expecting Forrest to recurve due to the break in the ridge since the first warnings on the system. The dynamic forecast aids were also in good agreement

in this regard. The One-Way Interactive Tropical Cyclone Model (OTCM) provided the best guidance for speed and the Nested Tropical Cyclone Model (NTCM) had the best handle on direction.

Over the next 30-hours, Forrest began to very gradually weaken as it moved slowly around the western end of the subtropical ridge and started moving northeastward. Figure 3-18-4 shows Forrest's outflow restricted to the west due to the increasing westerlies aloft. By 1912002, the system was beginning to accelerate northeastward at 23 kt (43 km/hr). Forrest completed transition to an extratropical cyclone and the final warning, indicating 55 kt (28 m/sec) intensity, was issued at 2006002.

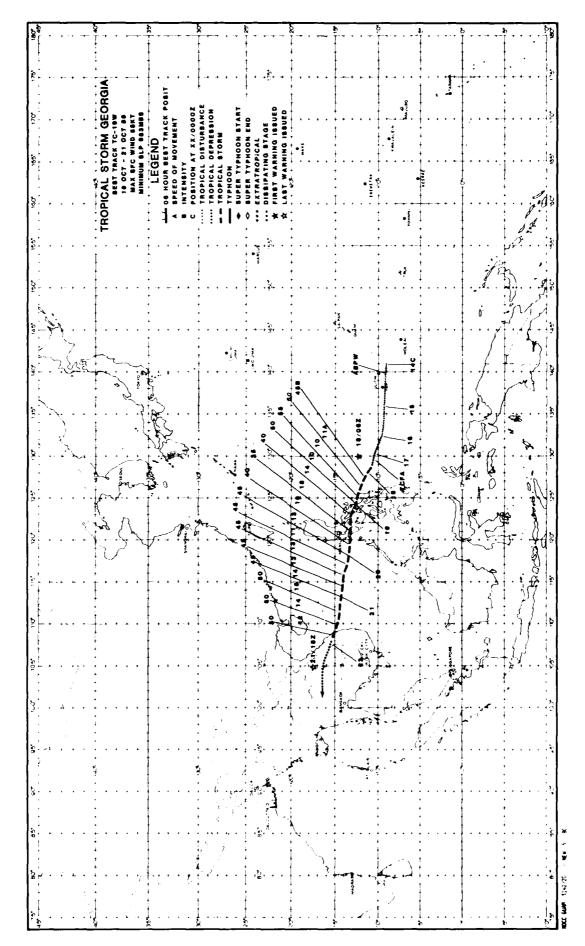

Typhoons Ellen (17W) and Forrest (18W) were already in progress, when Tropical Storm Georgia formed in the monsoon trough east of the Philippine Islands. The convective activity in the trough began to increase on the 14th of October, however it did not consolidate until the 18th.

First mention of Georgia as a tropical disturbance was on the Significant Tropical Weather Advisory (ABPW PCTW) of 140600Z. For the next four days, the large area of convection remained disorganized. By 17 October, satellite imagery (at 0300Z) indicated increased convective curvature and the (Dvorak) intensity estimate increased to 25 kt (13 m/sec). Aircraft reconnaissance later in the day closed off a weak, broad circulation center in the Philippine Sea 345 nm (639 km) northwest of Belau at

1706552. A Tropical Cyclone Formation Alert was issued at 1708212 based on these data.

The (Dvorak) analysis of satellite imagery at 1800522 estimated a maximum wind of 30 kt (15 m/sec) (Figure 3-19-1). Aircraft reconnaissance in the area at 1805432 estimated surface winds of 45 kt (23 m/sec) with a minimum sea-level pressure of 991 mb. Based on the information provided by the aircraft reconnaissance crew, the first warning followed for Tropical Storm Georgia, valid at 1806002.

Tropical Storm Georgia, valid at 180600Z.

At 181800Z, Georgia struck the central Philippine Islands with maximum winds of 55 kt (28 m/sec). The tropical cyclone weakened to 35 kt (18 m/sec) during the 16-hours it took to traverse the rugged central Philippine Islands. During this time, Georgia was forecast to remain south of the ridge and

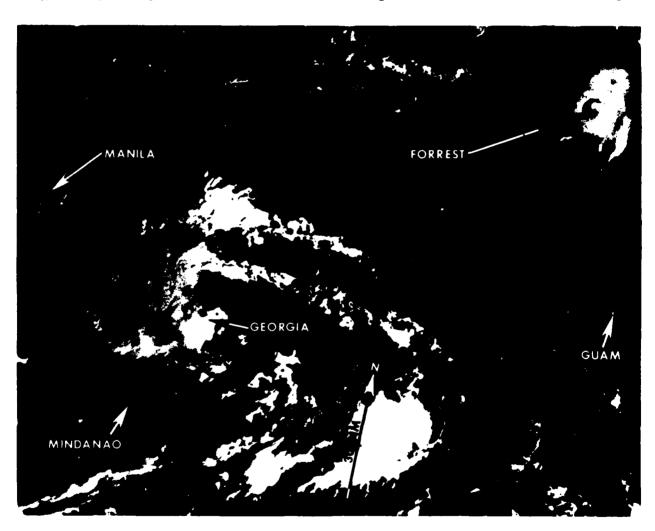


Figure 3-19-1. Georgia with (Dvorak) estimated winds of 30 kt (15 m/sec). Georgia was part of a multiple tropical cyclone outbreak that occurred in mid-October. Typhoon Forrest (18W) is located to the northeast of Tropical Storm Georgia on this satellite image. Typhoon Political Storm Georgia on this satellite image. Typhoon this pass (100052Z October DMSP visual imagery).

then move northwestward toward the island of Hainan. The forecast was in close agreement with the forecast aids for 180000Z through 181800Z which paralleled the low- to mid-level steering flow to the northwest. However, mid-level pressure surface heights rose across the northern South China Sea in the wake of Typhoon Ellen (17W), which had moved westward along the southern coast of mainland China. The 200000Z warning reflected a change in forecast philosophy and the track became more westerly with landfall in central Vietnam.

Upon entering the South China Sea, Georgia began to slowly reintensify. The final aircraft fix mission flew into Georgia on the 21st. On that flight, the reconnaissance aircraft reported severe turbulence in the convection surrounding Georgia's center (Figure 3-19-2). For the 12-hours prior to making landfall, Georgia's winds reached 50 kt (26 m/sec). The final warning was issued for Tropical Storm Georgia at 211800Z as the system made landfall and interacted with the rugged Armamitique mountains of central Vietnam.

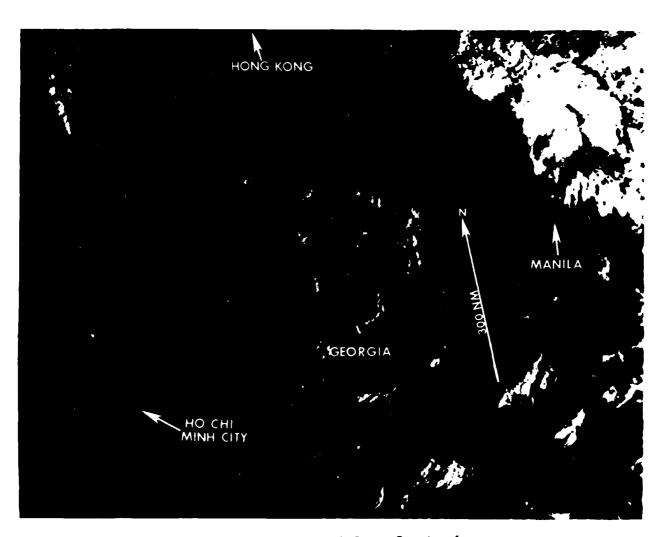
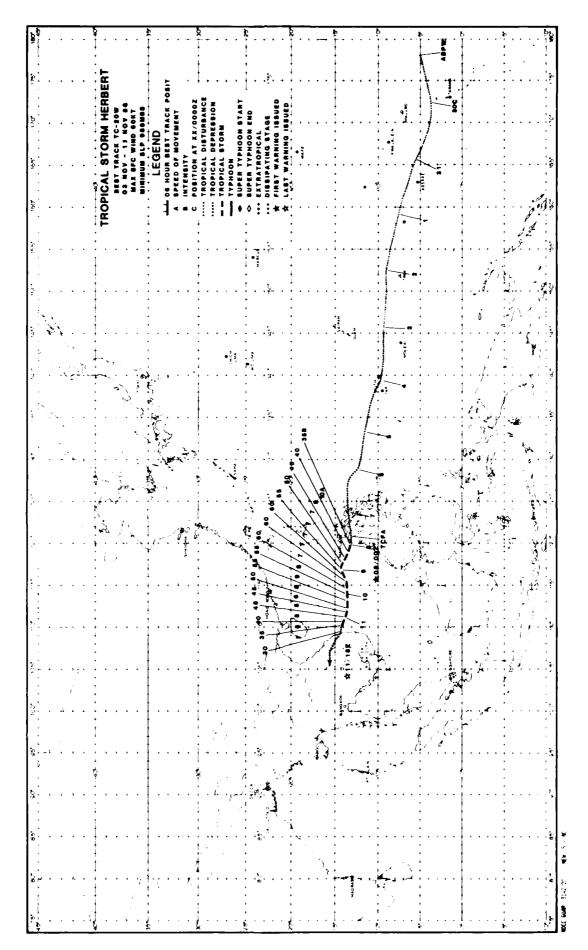


Figure 3-19-2. Tropical Storm Georgia after reintensifying in the South China Sea. The system made landfall 18-hours later and dissipated over the rugged mountains of Vietnam (210018Z October NOAA visual imagery).




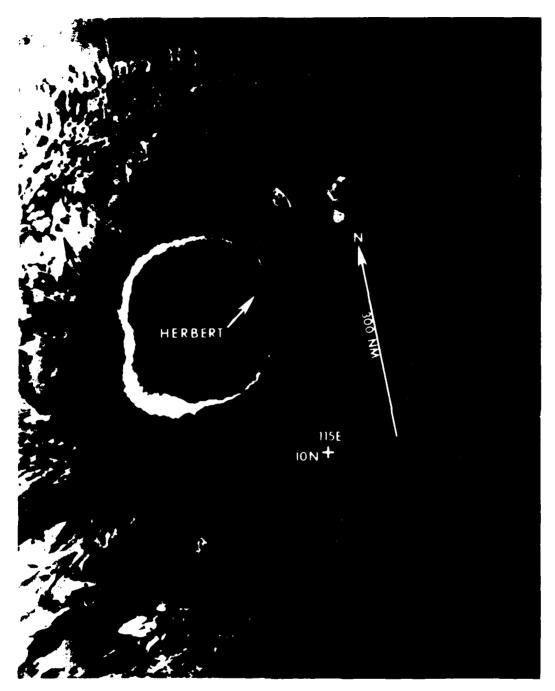


Figure 3-20-1 Herbert, as a tropical disturbance, tracked from east of the dateline across the western North Pacific. Philippine Sea and into the central Philippine Islands before reaching tropical storm intensity. The Significant Tropical Weather Advisory (ABPW PGTW) referred to this disturbance for a period of ten days (2906007 October to 0706007 November). The above NOAA imagery shows Tropical Norm Herbert near its maximum intensity of 60 kt (31 m/sec). On this specially enhanced infrared image note the small warm spot in the central dense overcast which is the eye. In the South China Sea, the strongest winds associated with Herbert persisted in the northeastern semi-orcle due to interaction with the northeast monsoonal flow from Asia. (092) 342. November NOAA infrared imagery).

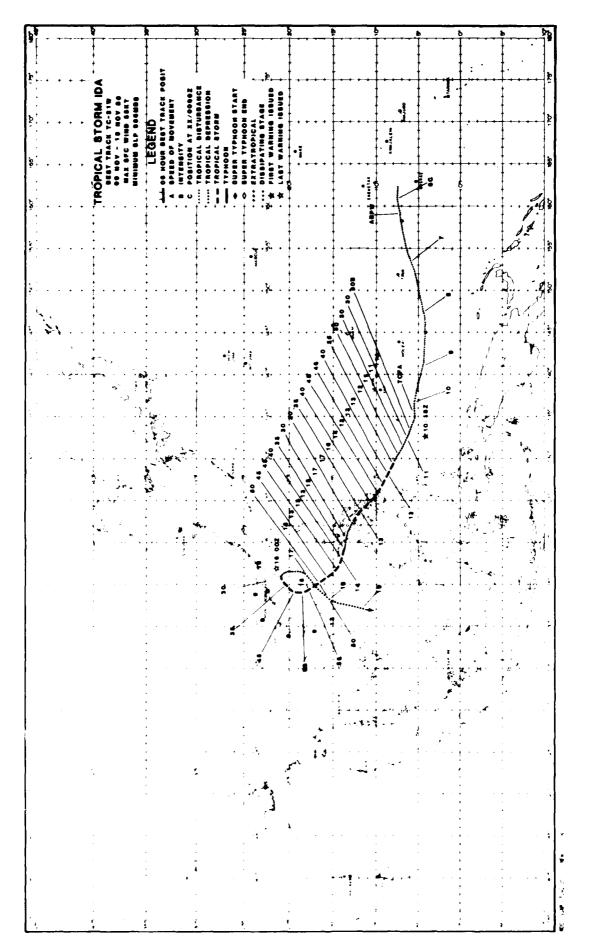

TROPICAL STORM IDA (21W)

Tropical Storm Ida was the second of four tropical cyclones to develop during the month of November. This tropical cyclone presented unique forecast problems for JTWC as it interacted with strong nor_heasterly low-level flow near the coast of China.

Ida was first detected as a tropical disturbance in the near-equatorial trough on 6 November. Satellite and synoptic data indicated an upper-level anticyclone was present, but only a weak circulation existed near the surface. It was mentioned on the 060600Z Significant Tropical Weather Advisory (ABPW PCTW). By 9 November, the upper-level circulation was located near an area of broad-scale westerly flow approximately 500 nm (926 km) south of Guam. Tropical Storm Herbert (20W) and Typhoon Joe (22W) also developed in this same genesis area during the first half of the month. The excess cyclonic vorticity created by easterly winds south of the

subtropical ridge and westerly winds near the equator enhanced development of the low-level circulation over the next 24-hours. Satellite imagery at 1001292 revealed a partially exposed low-level circulation center (Figure 3-21-1), prompting the issuance of a Tropical Cyclone Formation Alert, valid at 1006002. Intense convection developed in the northeast quadrant during the evening hours of the 10th. The first warning on Ida, valid at 1018002, was based on a satellite analysis of 35 kt (18 m/sec) winds using the Dvorak technique. Synoptic data indicated that Tropical Storm Ida lost its upper-level anticyclone, the main synoptic feature of its development, shortly after the first warning was issued. Aircraft reconnaissance flown on the morning of the 11th found a minimum sea-level pressure (MSLP) of 1004 mb, or the equivalent of 21 kt (11 m/sec) on the Atkinson-Holliday wind/pressure relationship.

In retrospect, the first warning may have been



Figure 3-21-1 Tropical Storm Ida in the formative stage of development Convective bands in the northern and western quadrants describe the upper-level anticyclone outflow that exists over the tropical disturbance (100129Z November DMSP visual magery)

issued prematurely without enough data from synoptic and aircraft reconnaissance data to support an upgrade to tropical storm intensity. The initial warning was based on satellite analysis of a rapidly developing cloud system, which later proved to be inaccurate.

Tropical Storm Ida gradually intensified as it approached the Philippine Islands. Aircraft reconnaissance at 120223Z found a MSLP of 990 mb, or a drop of 14 mb in 24-hours. Ida accelerated as it traversed the Philippines and weakened slightly due to orographic effects. It followed nearly the identical track through the islands as Tropical Storm Herbert (20W) just six days earlier. Ida regained tropical storm intensity shortly after entering the South China Sea and reached its peak intensity of 55 kt (28 m/sec) early on the 15th (see Figure 3-21-2).

At this point Ida was influenced by the northeast monsoon winds off of mainland China. The Unie-way Interactive Tropical Cyclone Model (OTCM) initiated the cyclone would continue its northward

KROUNCE ESTANANT FOR

track for approximately 24-hours. JTWC forecasts followed this prognostic reasoning. Post-storm analysis indicated that Ida attempted to recurve around the subtropical ridge as the upper-level circulation sheared off to the northeast. However, the low-level circulation drifted eastward in apparent opposition to the surface wind flow. The cold air feeding into Ida caused it to undergo rapid extratropical transition. Also, the cold air benind the mid-level trough just north of Tropical Storm Ida merged with the warm air advected northward by the tropical cyclone, leading to the strengthening of the frontal boundary off the China coast. Ida became embedded in this frontal boundary. The final warning was issued at 1602172. No loss of life or significant property damage was attributed to Ida.

The low-level eddy, which was the remnant of Ida, separated from the frontal boundary on 17 November and drifted southwestward in the South China Sea with the gradient-level flow. It persisted as a vortex on visual satellite imagery until 19 November.


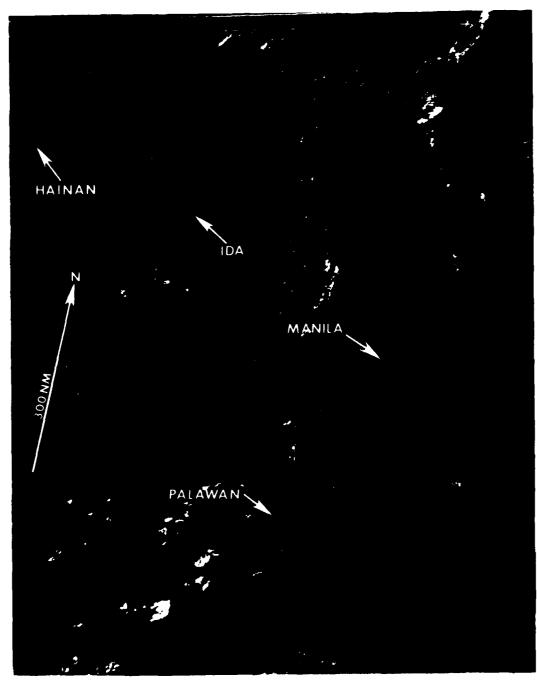


Figure 3-21-2. Tropical Storm Ida near maximum intensity in the South China Sea (150129Z November DMSP visual imagery).

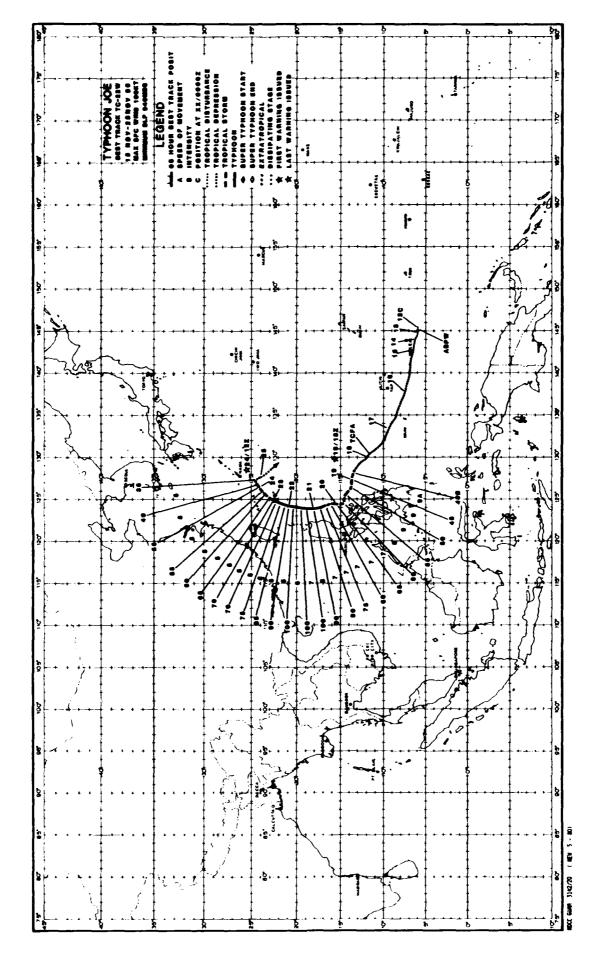

Typhoon Joe was the third of four tropical cyclomes to reach warning status in the month of November. As a tropical disturbance, Joe became evident on satellite imagery on the 12th. mentioned it for the first time on the Significant Tropical Weather Advisory (ABPW PGTW) when it appeared as an area of enhanced convective activity 425 nm (787 km) south of Guam at 1206002. The amount of convection and organization (Figure 3-22-1) increased very slowly as it moved west-northwestward. Synoptic data during this period indicated a weak low-level cyclonic circulation. Upper-level data indicated divergent flow aloft. The central convection began to consolidate and a Tropical Cyclone Formation Alert (TCFA) was issued at 172251Z. Satellite intensity analysis shortly after the TCFA issuance indicated surface winds of 35 kt (18 m/sec).

The initial aircraft vortex fix mission at 02132 on the 18th located a 30 kt (15 m/sec) low-level circulation. The extrapolated minimum sea-level pressure (MSLP) was 1005 mb, which normally supports less than 30 kt (15 m/sec) winds (Atkinson and Holliday, 1978). By 181800Z, however, satellite imagery indicated increased development and the first warning was issued on Tropical Depression 22W. A circular eye 15 nm (28 km) in diameter was first observed by aircraft reconnaissance at 190046Z. Some elongation north-northeast/south-southwest was apparent on satellite imagery by 191800Z as Joe began to interact with a mid-latitude trough passing to the north. Three hours later, aircraft reconnaissance reported that Joe's eye had become elliptical and the MSLP had decreased to 976 mb. Typhoon intensity was reached between 191800Z and 200000Z as Joe began to

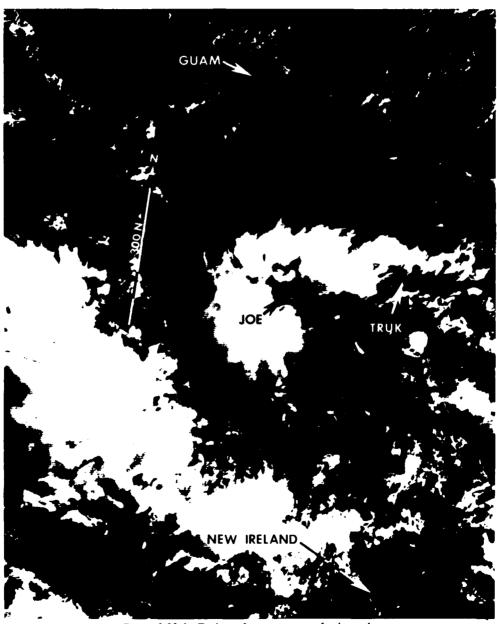


Figure 3-22-1. Typhoon Joe as an area of enhanced convection south of Cuam (140008Z November DMSP visual imagery).

move northward around the periphery of the subtropical ridge to its east (Figure 3-22-2).

The first warning (181800Z) forecast Joe to move northwestward, just over the northeast corner of the island of Luzon in the Republic of the Philippines.

The second through fifth warnings (from 190000Z to 191800Z) forecast a more westward track for Joe. These forecasts relied heavily on the dynamic guidance of the One-way Interactive Tropical Cyclone Model (OTCM) which indicated west-northwestward

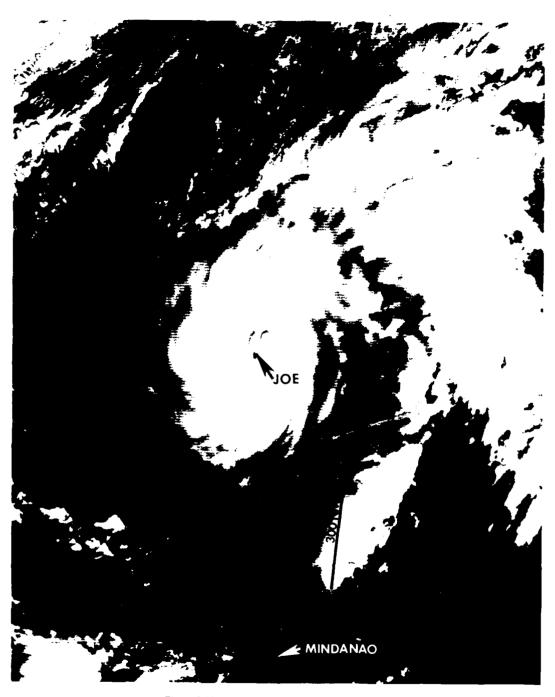


Figure 3-22-2. Typhoon Joe brushes by eastern Luzon (200128Z November DMSP visual imagery).

movement of Joe across central Luzon. However, the OTCM persisted in forecasting westward movement as late as 231200Z, three days after Joe had assumed a northerly track. This could possibly have been due to the model's inability to adequately handle the interactions between the typhoon and the strong northeasterly low-level flow from Asia. JTWC broke with the faulty OTCM guidance after the fifth warning and correctly forecast recurvature.

A ragged eye first became visible on satellite imagery at 01287 on 20 November. Typhoon Joe continued to intensify, even as the strength of the mid- to upper-level southwesterly flow increased

aloft. Joe continued to intensify and reached a peak of 100 kt (51 m/sec) maximum sustained surface winds at 2106002.

As Joe continued to move northward around the western end of the subtropical ridge, the vertical shear on the system increased. The result was Joe's upper-level outflow became displaced to the northeast of the low-level leaving the exposed low-level circulation behind. The final warning was issued at 2412002, since Joe no longer retained any persistent central convection. Only the residual low-level circulation persisted and was still evident on imagery through 242318Z (Figure 3-22-3).


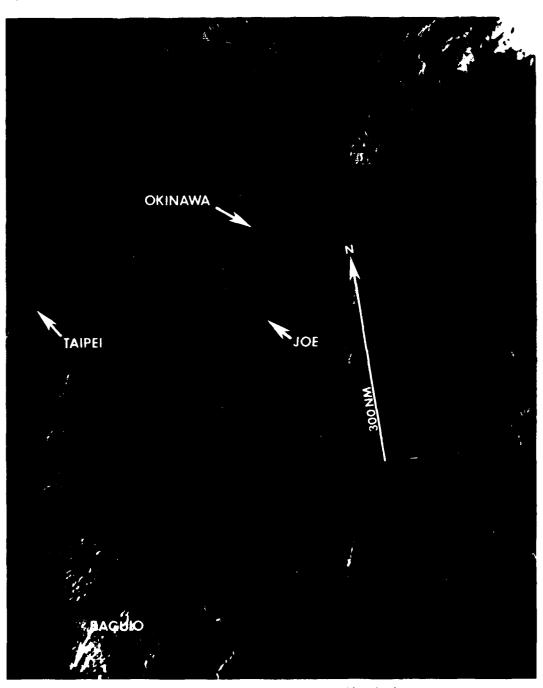


Figure 3-22-3. By 24 November, a residual low-level circulation was all that remained of Joe (242318Z November NOAA Visual imagery).

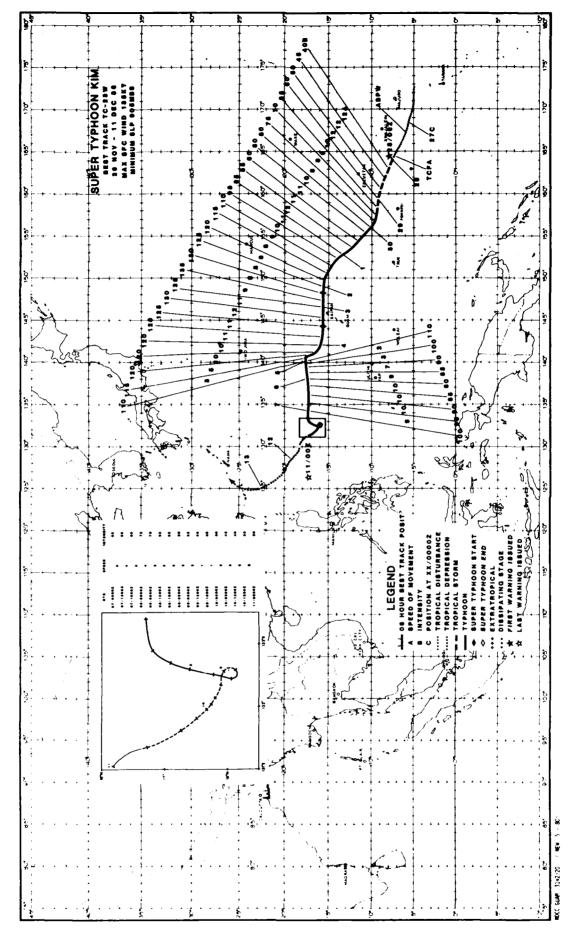

Super Typhoon Kim was a "midget" tropical cyclone that produced sustained winds of 135 kt (69 m/sec) with gusts to 165 kt (85 m/sec) and attained a minimum sea-level pressure (MSLP) of 905 mb. It was the fourth significant tropical cyclone that began in November, and was the first of four significant tropical cyclones in the month of December. Kim was the third super typhoon of the year and the first December super typhoon in twenty-two years since Fifty-two Super Typhoon Opal (December 1964). warnings were issued on Kim - more than any other tropical cyclone in 1986 except for Typhoons Vera (11W) and Wayne (12W). Thirty aircraft reconnaissance missions were flown on Kim, the most for any tropical cyclone in 1986. Included in these missions were five synoptic tracks and 45 center The information provided by the aerial reconnaissance platform was quite essential as Kim presented JTWC with track forecast problems at three different times.

Kim began, innocently enough, as a broad poorly organized area of convection near the dateline on the 26th of November. When convection persisted for 24-hours, JTWC first mentioned it on the Significant Tropical Weather Advisory (ABPW PGTW) at 270600Z. Maximum sustained winds were estimated at 10 to 20 kt (5 to 10 m/sec) and the MSLP was estimated at 1006 mb. Over the next 15-hours, outflow and convection increased significantly. Upper-level outflow was unrestricted in all quadrants and an upper-level anticyclone became well-established over the surface circulation center. The MSLP was estimated at 1005 mb. For these reasons JTWC issued a Tropical Cyclone Formation Alert (TCFA) at 272130Z, when the system was located about 360 nm (667 km) east of Pohnpei. Just nine hours later, at 280600Z, JTWC issued the first warning on Tropical Depression 23W based on a (Dvorak) intensity estimate of 35 kt (18 m/sec). At 281200Z, JTWC upgraded Tropical Depression 23W to based continued Storm Kim on Tropical intensification.

At 290126Z, the first aircraft reconnaissance mission closed off the surface circulation center 145 nm (269 km) north-northeast of Pohnpei. The Aerial Reconnaissance Weather Officer reported that an elliptical eye was beginning to form, which was open to the northwest. This first penetration found maximum 700 mb winds of 65 kt (33 m/sec) and a 700 mb height of 2921 meters, which corresponds to an MSLP of about 980 mb. The second penetration, 90 minutes later, reported maximum surface winds of 80 to 85 kt (41 to 44 m/sec). The 290600Z warning upgraded Kim to typhoon status.

From 261800Z through 291200Z (warning number 6), Kim tracked toward the west-northwest following a basic under-the-ridge scenario. At 2918002, the basic under-the-ridge scenario. eastward movement of a mid-latitude trough weakened This caused Kim to move the subtropical ridge. The weakness in the ridge was northwestward. misinterpreted by JTWC as a "break" in the ridge. At 010000Z, JTWC altered Kim's forecast track from an under-the-ridge scenario to a through-the-ridge scenario based on this break. Kim's track changed from anticyclonic to cyclonic, as Kim continued to track toward the northwest. As Kim reached the inflection point, it began to intensify at a rate slightly greater than expected from the normal Dvorak curve of one "T-number" per day. Kim's intensity increased from 85 kt (44 m/sec) at 010000Z to 135 kt (69 m/sec) by 022100Z.

The first, of three, major track forecasting problems arose when aircraft recomnaissance at 021105Z verified prior satellite imagery indications that Kim was moving westward. The mid-level ridge to the north strengthened as the low-to mid-level trough moved off to the east. Because of the significant forecast track change on Kim, an abbreviated warning message was sent out at 022100Z, since Kim immediately became a threat to Saipan.

At about 030400Z, Super Typhoon Kim, with its peak winds of 135 kt (69 m/sec), passed about 18 nm (33 km) to the north of Saipan. Kim inflicted



Figure 3-23-1. One of the many downed telephone poles leans against a shoe store in Garapan, the major city of Saipan, in the aftermath of Kim (Photo provided courtesy of Guam Publications, Inc.).

substantial damage to Saipan, leaving the entire island without electricity and water. An estimated one-third of all power poles were down (see Figure 3-23-1), hundreds of people were left homeless, 14 people were injured, mainly due to flying glass, and one (heart attack) fatality was reported. Damages (Figure 3-23-2) were estimated at about 15 million dollars by the Governor of Saipan. A team of U.S. Navy Construction Battalion personnel (Seabees), engineers from the U.S. Navy Public Works Center (Guam) and electrical generators were sent to Saipan to get the island's essential power system back on-line.

Kim continued tracking westward until 040000Z (Figure 3-23-3). Afterward, it began moving northwestward. This presented the second major forecasting problem with Kim. JTWC had followed the One-Way Interactive Tropical Cyclone Model (OTCM) guidance and repeatedly forecast recurvature. A synoptic track flown between 040500Z and 041200Z indicated a "break" in the subtropical ridge approximately 135 nm (250 km) southwest of Iwo Jima. The forecast looked good, but for the second time an unforecasted major directional change in the track

occurred. Once again, this was not a "break" in the ridge, but merely a weakness that would cause the tropical cyclone to take a "step" toward the northwest and then return to a the westward track; as the mid-latitude trough moved north and then east of the system.


At 071200Z, Kim abruptly changed track and began moving toward the south along the leading edge of a modifying polar air mass moving off the Asian landmass. At the same time, the entrainment of cold air and increased vertical shear started to weaken the tropical cyclone. Aircraft recomnaissance at 081542Z, 082130Z and 090000Z documented this trend and Kim was subsequently downgraded to tropical storm intensity at 090000Z. By 090600Z, Kim's intensity was down to 55 kt (28 m/sec), and forty-two hours later, at 110000Z, to 30 kt (15 m/sec). After three days of erratic movement, Kim was further downgraded to a tropical depression. The final warning was issued at 110000Z as the system dissipated over water. The remains of Kim tracked west-northwestward and dissipated over the Philippine Sea 300 nm (556 km) east of the island of Luzon.



Figure 3-23-2. Many structures were extensively damaged by wind and water (Photo courtesy of Guam Publications, Inc.).



Figure 3-23-3 A day after damaging Saipan, Super Typhoon Kim was still on a westward track (040004Z December DMSP visual imagery)

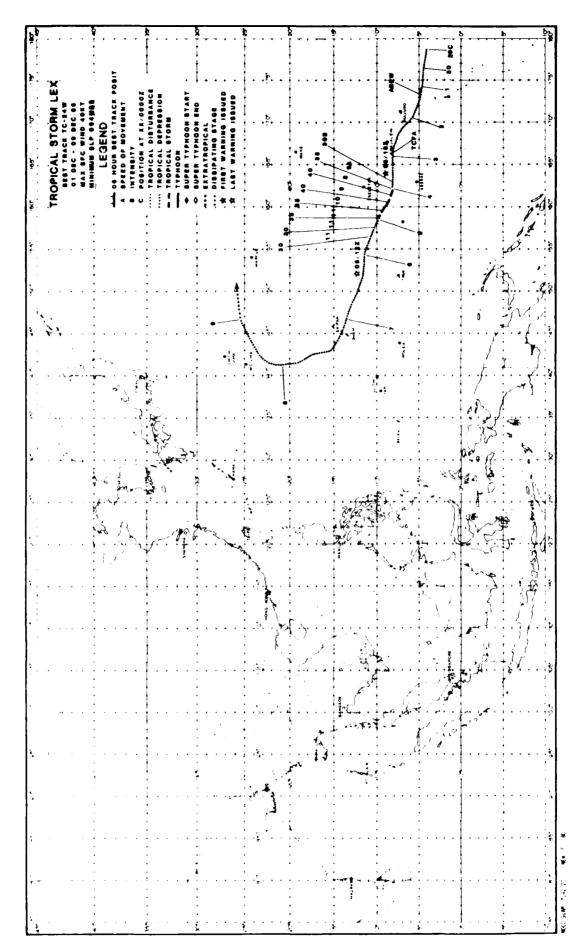

Tropical Storm Lex was the first of three significant tropical cyclones to develop in the month of December. Initially, Lex developed rapidly in the wake of Super Typhoon Kim (23W) and presented a threat to Guam. Significant further development was inhibited by Kim (23W) and a mid-latitude trough, although a brief flare-up of convection occurred just before Lex passed through the southern Marianas.

Lex first appeared as a small mass of convection about 300 nm (556 km) to the east-southeast of the Kwajalein Atoll in the Marshall Islands at 3012002 November. The convection rapidly increased. Upper-level organization and low-level inflow also increased over the next 18-hours. For these reasons, Lex was initially placed on the Significant Tropical Weather Advisory (AbrW POTW) at 0106002 December.

The tropical disturbance continued to show potential for development and at 0223452, it became the subject of a Tropical Cyclone Formation Alert (TCFA). The convection became more centralized, prompting JTWC to issue the first warning on Tropical Depression 24W at 031800Z. Upper-level organization continued to improve, as satellite imagery indicated good banding features to the north and south. Increased satellite (Dvorak) intensity estimates resulted in an upgrade from Tropical Depression 24W to Tropical Storm Lex at 040000Z on the second

warning.

Lex was first fixed by aircraft reconnaissance at 0405372. The Aerial Reconnaissance Weather Officer reported surface winds of near 45 kt (23 m/sec), and fixed the surface center further to the east of the previous (040000Z) warning position, which was based on satellite data, and 85 nm (157 km) east of the 040600Z forecast position. This led JTWC to relocate Lex's position on the 040600Z warning.

Although forecast to reach typhoon intensity within 48-hours, it had already attained its peak intensity by 040600Z. The combination of an eastward moving trough and the proximity of Kim (23W) to the northwest, greatly inhibited Lex's upper-level outflow.

Aircraft reconnaissance indicated a tilt toward the west between the surface center and the upper-level center and a possible secondary center about 30 nm (56 km) to the northwest of Lex. As evidenced in visual satellite imagery at 0423442 (Figure 3-24-1), Guam was between Super Typhoon Kim (23W) (to the northwest) and Tropical Storm Lex. Lex continued to decrease in convection and organization. A nighttime aircraft recomnaissance fix mission scheduled for 051200Z found 700 mb westerlies throughout the area and no sign of a closed circulation. For these reasons, Tropical Storm Lex

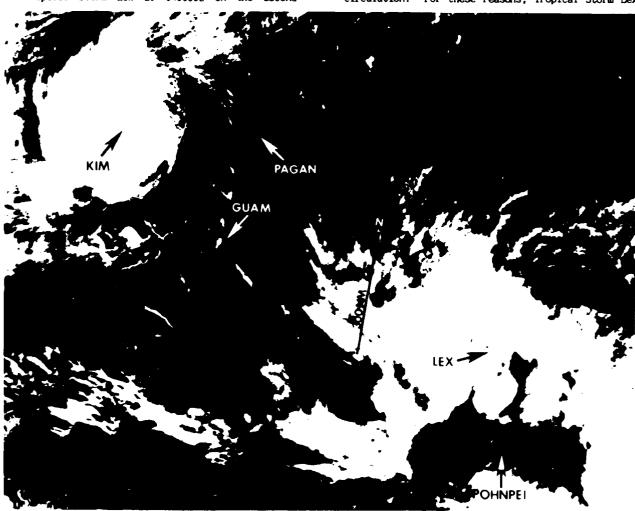


Figure 3-24-1. Visual satellite imagery showing Super Typhoon Kim (23W) and Tropical Storm Lex—The island of Guam is in the region between the two tropical cyclones (042344Z December DMSP visual imagery)

was downgraded to Tropical Depression 24W, and the final warning coumber $\theta_{\rm c}$ was issued at 0512002.

JTWC continued to monitor the remnants of lex. Because of the sudden flare-up of central cold cover (Dvorak, 1984) cloud viewed on the satellite infrared imagery (Figure 3-24-2), lex again was the subject of a TCPA (0023002) about 80 nm (148 km) east-southeast of Guam. Due to the proximity to Guam, the prospect of sudden deepening and the uncertainty concerning what was really out there, JTWC diverted a WC-130 aircraft from a fix mission, that was in progress on Kim (23W), to fly an investigative profile on lex.

The results were that Lex's low-level circulation could not be closed off and warnings were not resumed. The weak disturbance moved rapidly by at 28 kt (%) km/hr) and passed directly over the Island of Rota located 40 nm (74 km) north-northeast of Quam. Mid- to upper-level shear over the system was strong and the upper-level outflow remained restricted by Super Typhoon Kim (23W). JTMC cancelled the TCFA at 0715002. The remains of Lex then moved northwestward until 080000Z, then curved northeastward and transitioned to an extratropical system.


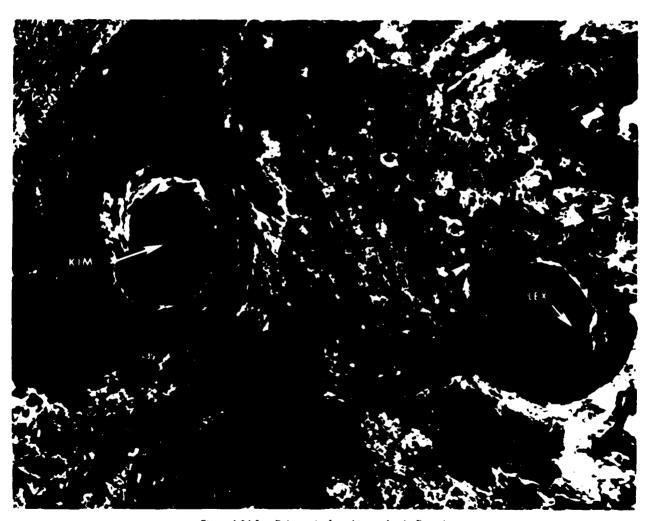


Figure 3-24-2. Enhanced infrared image for the Dworak intensity estimation technique of the disturbance (Lex) and Kim (23W) at typhoon intensity. At first glance, the cloud signatures look similar. However, the distinction between the transitory flare-up of the central cold cover (Dworak, 1984) over Lex and the persistent central dense overcast and eye of Kim (23W) is crucial for proper intensity analysis (061758Z December NOAA infrared imagery).

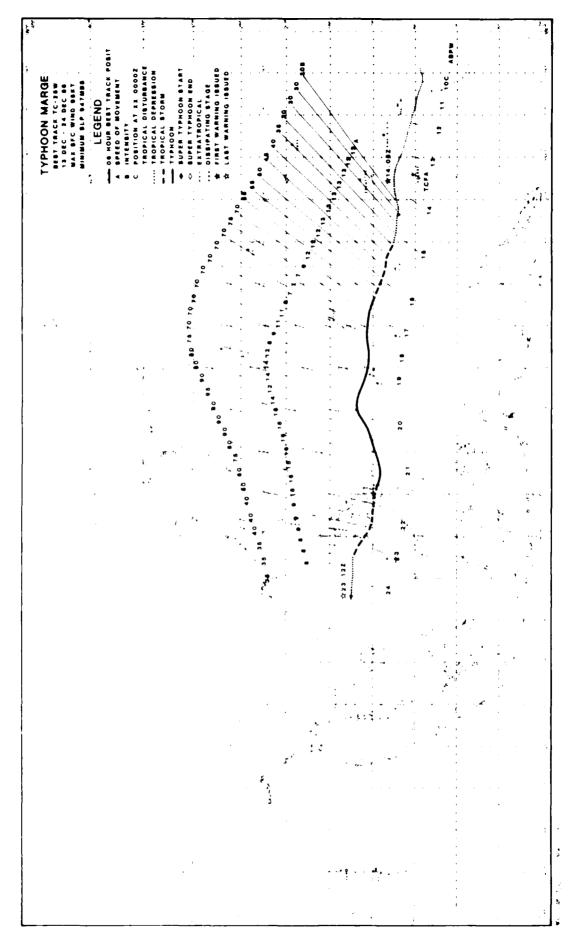

Typhoox. Marge was a mid-December tropical cycline that originated in the near-equatorial trough at low latitudes just east of the Marshall Islands. Flow to develop, Typhoon Marge presented a couple of unique forecasting problems which included some unexpected movement in the Philippine Sea.

hererenced for the first time on the Significant Iropical Weather Advisory (ABPW POTW) on 9 December, the first warming wasn't issued until 140000Z December. During the intervening time, Mange drifted slower toward the northwest as a large area of discipations convection. The first Tropical Cyclone formation Alert valid at 130330Z was based on

satellite (Dvorak) intensity estimates of 20 to 30 kt (10 to 15 m/sec) winds and decreasing sea-level pressure. The first warning followed on the 14th and was based on satellite imagery which indicated an increase in convection and upper-level organization. From the 15th through the 16th, Marge's mean track was west-northwestward as the forecasts followed the under-the-ridge scenario.

Based on the Dvorak analysis of satellite imagery at 150300Z, indicating a maximum wind of 35 kt (18 m/sec), Tropical Depression 25W was upgraded to tropical storm intensity (see Figure 5-25-1). The

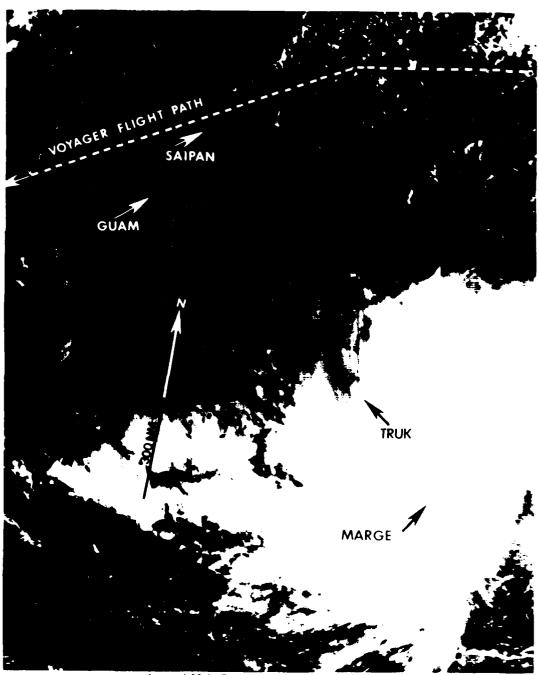


Figure 3.25.1. Tropical Storm Marge passed south of Guam just nine hours before Voyager left on the start of its record setting flight (1508177 December NOAA visual imagers)

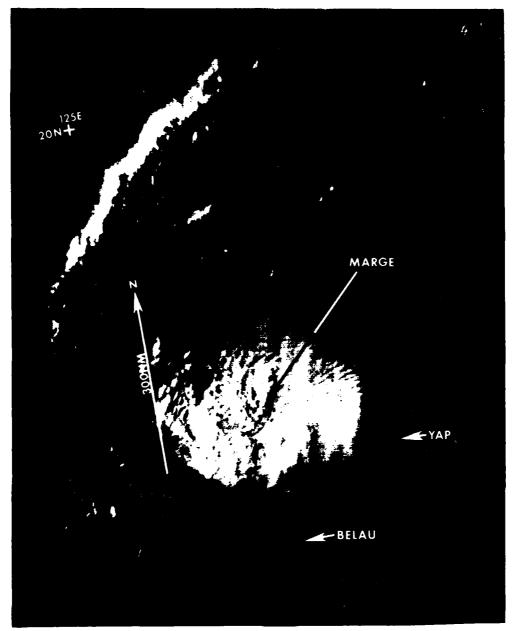


Figure 3-25-2. Marge six hours prior to reaching maximum intensity (192236Z December NOAA visual imagery).

first aircraft reconnaissance mission on the 15th found a minimum sea-level pressure (MSLP) of only 1000 mb, 30 kt (15 m/sec) winds and did not close off a circulation. The next aircraft mission early on the 16th located a vortex with a MSLP of 996 mb and maximum surface winds of 60 kt (31 m/sec). The 1612002 warning upgraded the system to a typhoon.

The first forecast problem with Marge arose at 1700002, when satellite fixes and aircraft reconnaissance observations began indicating that Marge was no longer moving as forecast toward the west-northwest, but in a more westerly direction. The computer prognostic guidance persisted with the now incorrect west-northwest movement. From 170000Z to 181800Z Marge moved due westward along the edge of the modifying polar air and passed 160 nm (296 km) south of Guam. No evacuations or significant damage to the island occurred.


The next forecast problem arose at 200000Z as Marge began slipping toward the west-southwest. JTWC's initial response was to consider the southward movement as a short-term event and the forecasts reflected this philosophy. This proved to be in error as Marge was forced further southwestward by a strong surge of polar air from the Asian landmass. Marge's unforecast movement in the Philippine Sea caused considerable concern for shipping. For example, the USS Proteus (AS 19) passed within 60 nm (111 km) of the center of Typhoon Marge, circled around its southwest quadrant and experienced winds of 50 kt (26 m/sec) at 210430Z. There was minimal damage to the ship and no personnel were injured. At that time Marge's maximum winds near the center were 80 kt (41 m/sec) and had decreased from a maximum of 95 kt (49 m/sec) earlier at 200600Z (see Figure 3-25-2).

After entering the Philippine Islands, the system weakened and changed course towards the northwest. It then tracked into the South China Sea and dissipated over water.

During Marge's lifetime, aviation history was being made. The Voyager, a light-weight, graphite fiber-bodied aircraft, piloted by Burt Rutan and Jeana Yeager, departed Edwards Air Force Base, California, on 15 December at 1402Z (14 December at 11:02 A.M. EST) in a record-setting attempt to circle the globe on a single tank of fuel. Initially, the flight plan routed Voyager south of the equator, passing just north of Australia on the Pacific portion of the journey. However, a very active

Seeded before the seeds

monsoon trough present in the western North Pacific at this time forced a change in plans. Following coordination with JTWC, Voyager was rerouted north of the Mariana Islands. While it winged its way west, Marge continued to intensify. Although, at one point it appeared the Voyager might have to terminate its mission, the low-level inflow winds into Marge's center actually aided in the flight. Despite some moderate turbulence, as a consequence of flying between two of Marge's spiral bands to pick up increased tail winds of 35 kt (65 km/hr), Voyager was able to reduce fuel consumption and speed onward to complete a successful mission.

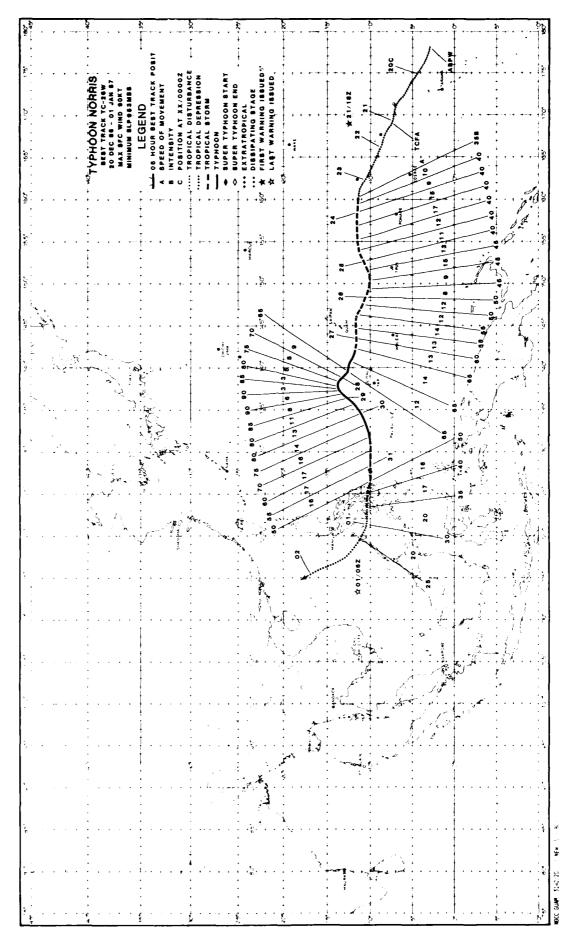

TYPHOON NORRIS (26W)

The final typhoon of 1986, Typhoon Norris, began as Typhoon Marge (25W) was moving through the Caroline Islands and south of Guam. Norris was first detected as a weak low-level circulation in the near-equatorial trough south of the Marshall Islands on 17 December. Initially, an anticyclone aloft at low latitudes near the dateline aided the development of Norris by providing a favorable low-shear environment.

First carried on the Significant Tropical

Weather Advisory (ABPW PGTW) on 19 December at 0600Z, the disturbance drifted northwestward while its organization and convection remained minimal. On 20 December, the organization began to improve and at 210300Z, a Tropical Cyclone Formation Alert was issued.

The first warning was issued on 21 December at 1200Z on Tropical Depression 26W when Dvorak analysis of satellite reconnaissance indicated 30 kt (15 m/sec) winds were present (see Figure 3-26-1).

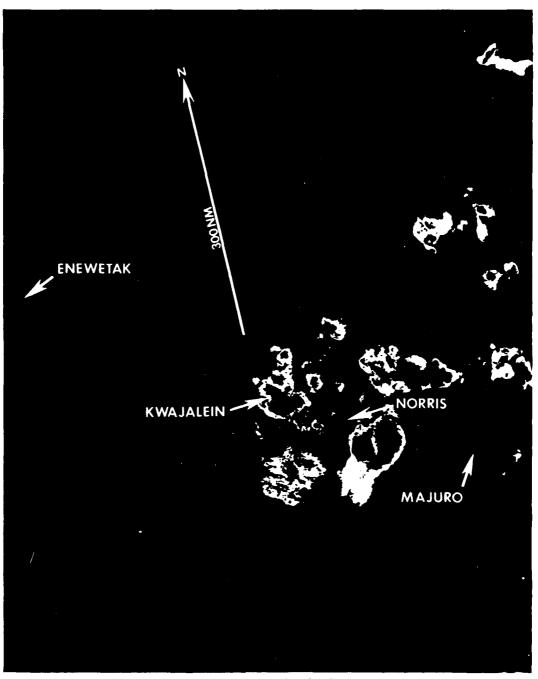


Figure 3-26-1: This enhanced infrared (EIR) image of the tropical disturbance, which ultimately became Typhoon Norris, shows it embedded in the near-equatorial trough (2107562 December DMSP infrared imagery).

Satellite imagery on 22 December revealed an exposed low-level circulation center with the convection displaced approximately 60 nm (111 km) to the west (Figure 3-26-2). Aircraft reconnaissance on the morning of 23 December located the low-level vortex. The Aerial Reconnaissance Weather Officer (ARWO) reported winds of 35 kt (18 m/sec) and a minimum sea-level pressure (MSLP) of 999 mb, which resulted in the upgrade to Tropical Storm Norris (26W) on the 230000Z warning.

From the time Norris began forming in the near-equatorial trough, the system moved steadily toward the northwest following the forwcast under-the-ridge scenario. The movement toward the northwest was also influenced by the passage of a mid-latitude trough. On 23 December, the mid-latitude trough had moved to the east of the system and the subtropical ridge began to rebuild. Norris responded and moved westward. In addition, the low-level circulation center had just started to move under the convection (see Figure 3-26-3).

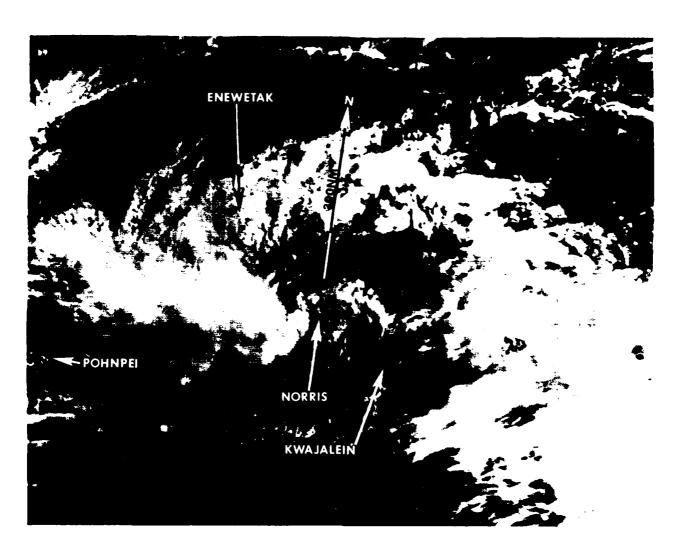


Figure 3-26-2: Vertical shear continues to force the convection towards the west of the low-level circulation center (220400Z December NOAA visual imagery).

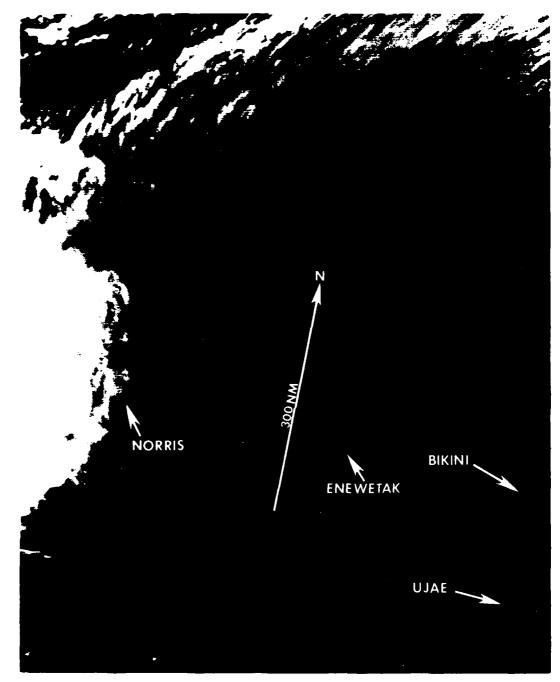


Figure 3-26-3. Tropical Storm Norris still struggling to get organized. The low-level circulation center is beginning to move under the convection (240338Z December NOAA visual imagery).

As the ridge continued to build, Norris began moving away from the forecast track and towards the west-southwest on Christmas Day (Figure 3-26-4). The forecast guidance from the dynamic One-Way Interactive Tropical Cyclone Model (OTCM) and persistence was for westward movement. Within 12-hours the southwestward drift stopped and Norris once again began moving toward the west-northwest. Aircraft reconnaissance on 25 December found the first indications of a developing elliptical-shaped eye.

As Norris moved towards the west-northwest, the system continued to intensify. Winds of typhoon intensity were forecast. Due to a mid-latitude frontal system moving off the Asian mainland,

expected adjustment of the subtropical ridge, and an anticipated track change, officials in the southern Marianas braced for the worst. However, aircraft reconnaissance at approximately 2612002 found the movement more westward than west-northwestward. Over the next 12-hours residents of the southern Marianas Islands continued to wait and hope that Norris would miss them. Norris slipped by to the south, passing within 100 nm (185 km) of Guam. Guam experienced 50 kt (26 m/sec) winds and localized flooding, but damage was minimal.

After by-passing Guam and once again moving west-northwestward, Norris continued to develop (see Figure 3-26-5). Based on Dvorak intensity analysis of 65 kt (34 m/sec), Tropical Storm Norris was

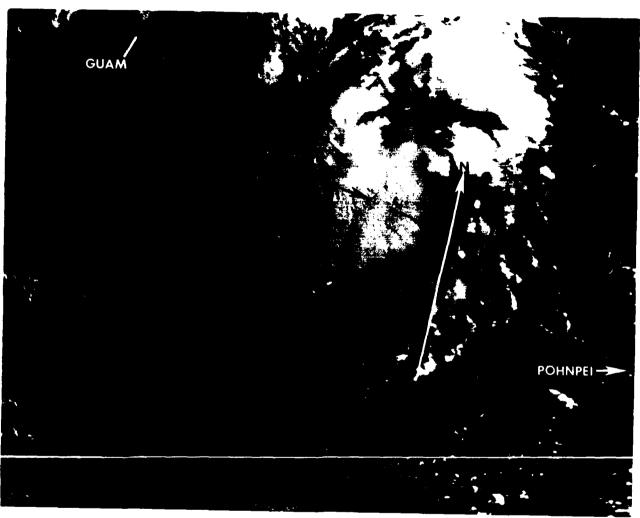


Figure 3-26-4: Norris matures and moves toward the west-southwe; on Christmas Day (250509Z December NOAA visual imagery).

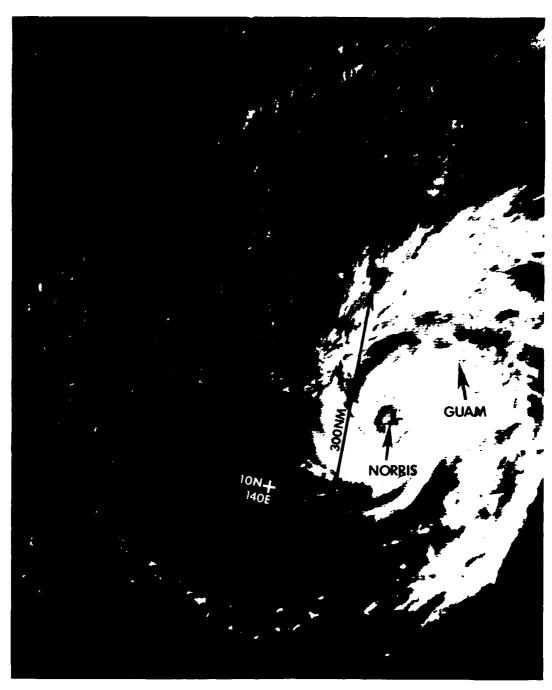


Figure 3-26-5: Tropical Storm Norris, just prior to its being upgraded to a typhoon (270041Z December DMSP visual imagery).

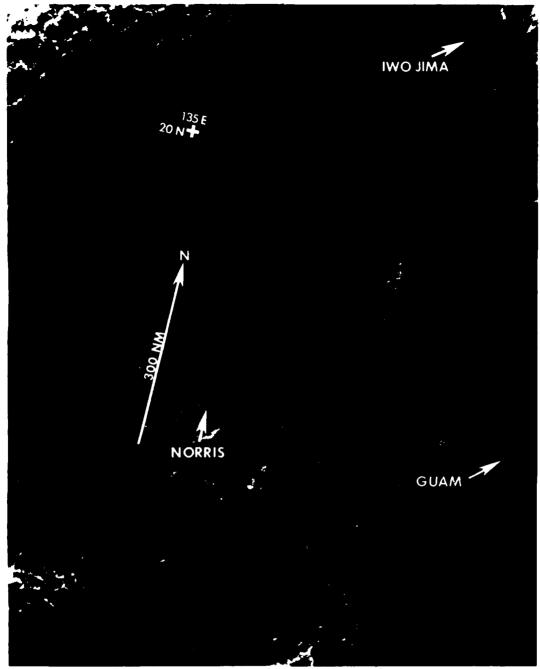


Figure 3-26-6. Typhoon Norris at maximum intensity. The forecast track, until this time, indicated that Norris would recurve and become extratropical (290000Z December DMSP visual imagery).

upgraded to Typhoon Norris at 270600Z. Aircraft recomnaissance at 271101Z reported an eye and a MSLP of 984 mb.

Norris continued moving northwestward toward the weakness in the ridge induced by the passage of a mid-latitude trough moving off the Asian mainland. Previous forecasts had indicated continued movement toward the west-northwest; however, as the mid-latitude trough moved further south and east, Norris' forecast track, starting with the 280600Z warning, was altered to indicate recurvature and extratropical transition.

By 290000Z, the trough moved east and Norris reached maximum intensity (see Figure 3-26-6). The ARWO on the reconnaissance fix mission earlier, at 282103Z, observed 89 kt (46 m/sec) maximum surface

winds and a MSLP of 953 mb. Norris, which was caught along the edge of the modifying polar air and northwesterly flow in the Philippine Sea, abruptly changed course and moved southward for 36-hours. Once again the southwesterly course was not forecast or addressed beforehand by the OTOM guidance.

At 301200Z, Norris' track changed to due west as it headed towards the central Philippine Islands (see Figure 3-26-7). After being downgraded to tropical storm intensity at 301800Z, Norris moved into the South China Sea and continued to weaken. By 010300Z January, Norris was further downgraded to a tropical depression. By that time, strong upper-level southeasterly flow had exposed the low-level circulation center. Norris dissipated over water in the South China Sea on January 2nd.

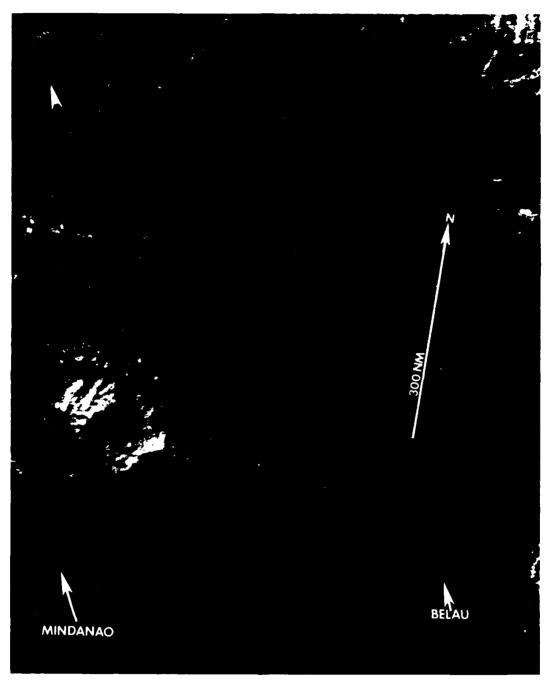



Figure 3-26-7: Tropical Storm Norris approaching the Philippine Islands (310101Z December DMSP visual imagery).

3. NORTH INDIAN OCEAN TROPICAL CYCLONES

Tropical cyclone activity in the North Indian Ocean was slightly below normal. Three significant tropical cyclones, all of tropical storm intensity, developed as compared to the climatological mean of four. These systems occurred in the spring and fall transition seasons, which normally encompasses the peak of the activity. Tables 3-5 and 3-6 provide a summary of information for 1986 and comparison with earlier years.

	1986	NORTH INDIAN OCEAN 1906 SIGNIFICANT TROPICAL CYCLONES								
ropical cyclo	NE PERIOD OF WARNING	CALENDAR DAYS OF WARNING	NUMBER OF WARNINGS ISSUED	MAXIMUM SURFACE WINDS-KT (M/S)	ESTIMATED MSLP - MB					
C 01B	07 JAN - 11 JAN	5	17	45 (23)	991					
rc 02B	09 NOV	1	2	50 (26)	989					
TC 03A	09 NOV - 11 NOV	3	9	45 (23)	990					
	1986 TOTALS:	8 *	28							
OVEDIADDING	DAYS INCLUDED ONLY ON	OF IN SHM.								

TABLE 3-6.		FREQ	JENCY (F NOR	TH IND:	IAN OCI	EAN TR	OPICAL	CYCLO	NES			
YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	ост	NOV	DEC	TOTA
1971*	-	_	-	_	_	0	0	0	0	1	,	C	2
1972*	0	0	0	,	Q.	D	0	0	2	0	1	0	4
1973*	0	0	0	0	0	0	0	0	0	1	2	1	4
1974*	0	0	0	0	0	0	0	0	0	0	١	0	1
1975	1	0	0	0	2	0	0	0	0	1	2	0	- -
1976	0	0	0	1	0	1	0	0	1	1	0	1	5
1977	0	0	0	0	1	1	0	0	0	1	2	0	5
1978	0	0	0	0	1	0	0	0	0	1	2	0	4
1979	0	0	0	0	1	1	0	0	2	1	2	0	7
1980	0	0	0	0	0	0	O	0	0	0	1	1	2
1981	0	0	0	0	0	0	0	0	0	3	1	1	3
1982	0	0	0	0	1	1	0	0	0	2	1	0	5
1983	0	0	0	0	0	0	0	1	0	1	1	0	3
1984	0	0	0	0	1	0	0	O	0	1	2	0	4
1985	0	0	0	0	5	0	0	0	0	2	1	1	6
1986	1	0	О	0	0	0	0	0	0	0	2	0	3
975-1986)													
AVERAGE	0.2	0.0	0.0	0.1	0.8	0.3	0.0	0.1	0.3	1.0	1.4	0.3	4.4
CASES	2	0	0	1	9	4	0	1	3	12	17	4	53
JTWC WARNING FEAST LONGITUDE EXCLONES THAT EXCLONES THAT WITH THE 1975 TO INCLUDE THE FORMATION ALEFTROPICAL CYCLOTHAT DEVELOPES	E. AS DIRECTED TROPICAL CE WESTERN PORTS: 3 OF DOME FORMATIC	CTED B'OR TRAC YCLONE ORTION 9 FORM	Y CINCE CKED THE SEASON OF THE	PAC, J'HROUGH F, JTW BAY LERTS	TWC ISS THAT I C'S ARI OF BENG DEVELO	SUED WARPORTION EA OF D GAL AND OPED IN	ARNINGS OF THE STATE OF THE STA	S ONLY HE BAY SIBILIT ENTIRE	FOR THE OF BEINTY WAS ARABIN	HOSE TI NGAL. EXTENI AN SEA OPICAL	ROPICA COMME DED WE: CYCLO	L NCING STWARD NES.	
warnings: Num	BER OF CAL	ENDAR 1	VARNINO	DAYS	: 6	3							
NUP	BER OF CAL					ı							
NUN	BER OF CAL		-			3							

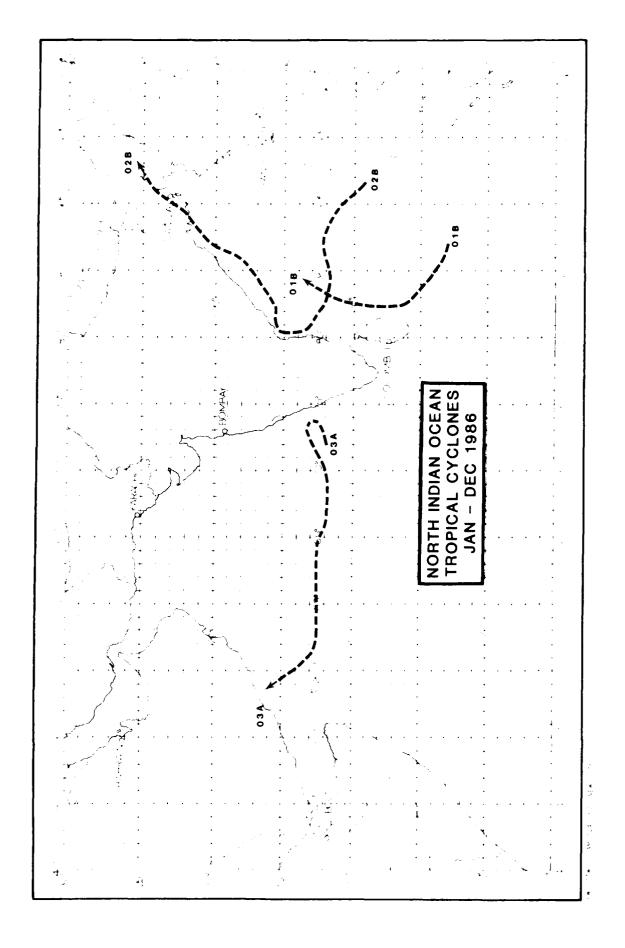

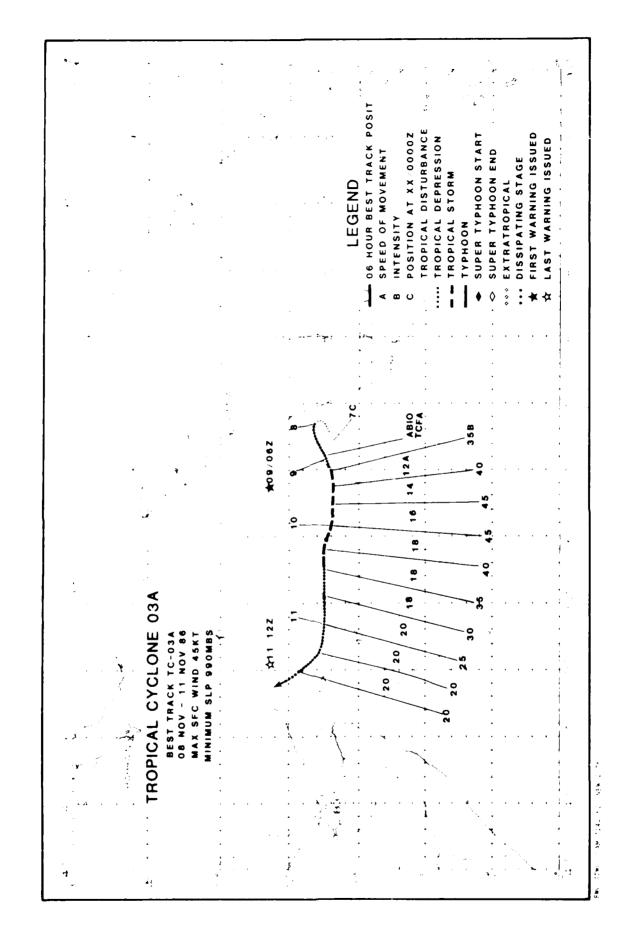
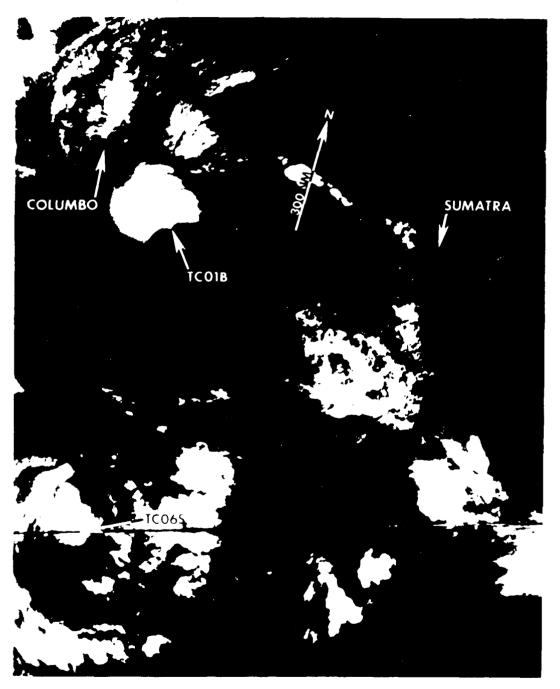
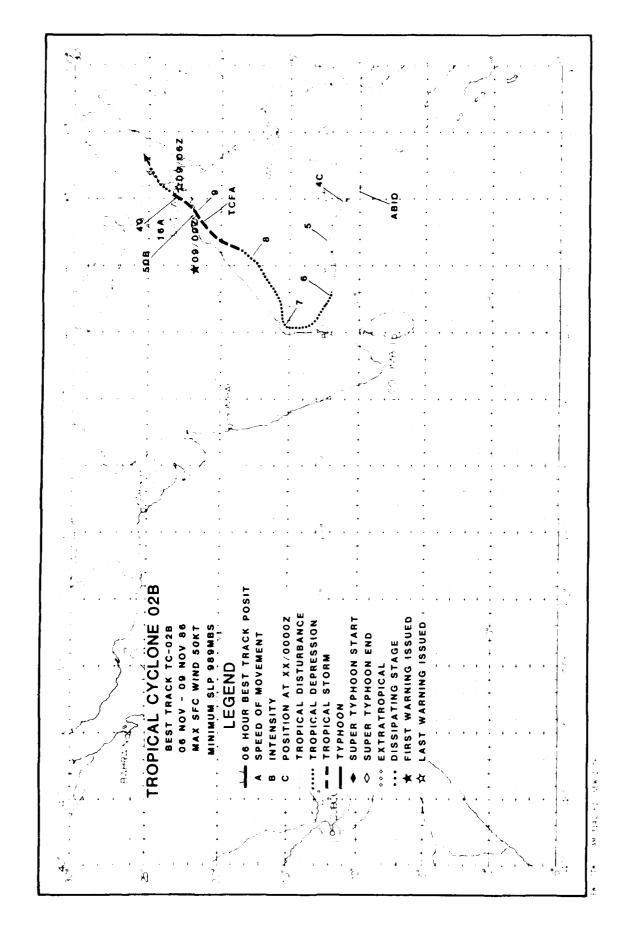


Figure 3 01B.1. The partially exposed low-level center of Tropical Cyclone 01B was located southeast of Sri Lanka on the 8th of January. The system was being sheared by upper level flow associated with Tropical Cyclone 04S to the south, which was at typhoon intensity 00804047 January DMSP visual imagery).





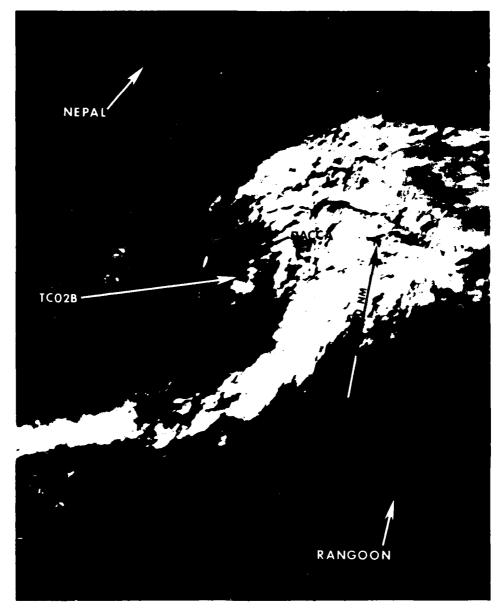
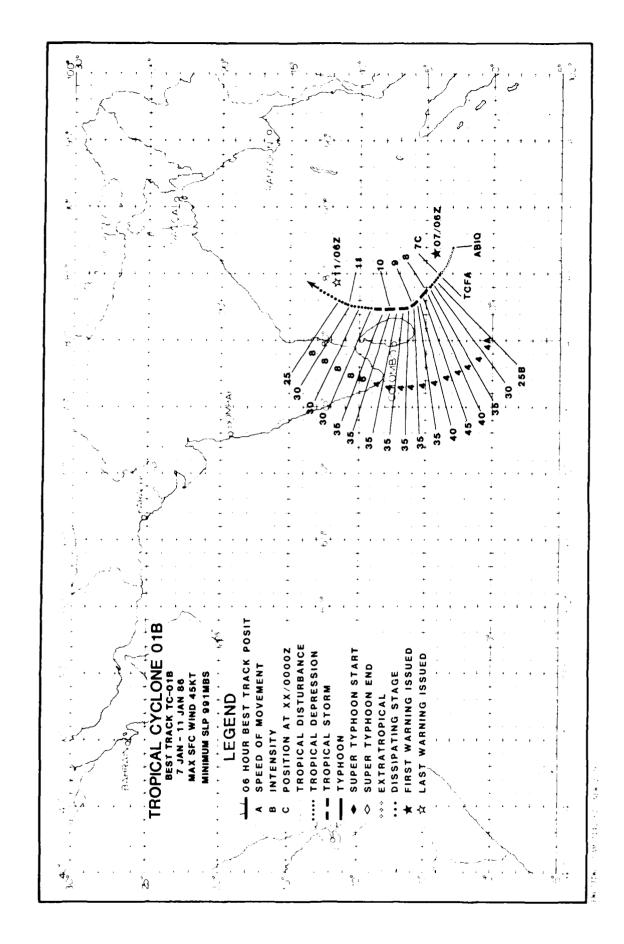


Figure 3-02B-1. Tropical Cyclone 02B was the only tropical cyclone to develop in the Bay of Bengal during the fall transition season. Two warnings were issued on the system. It began on 3 November as a disturbance in the Bay of Bengal approximately 60 nm (111 km) west of the Nicobar Islands. Over the next three days the disturbance continued to slowly intensify as it tracked toward the west. The disturbance then curved northward and skirted the Indian coast. Post analysis indicated tropical storm intensity had been attained 12-hours prior to the issuance of the first warning at 0900002. Tropical Cyclone 02B continued on its northeastward track and immediately made landfall at the Ganges River Delta in Bangladesh at 0900002. The maximum intensity of 50 kt (20 m/sec) was reached just prior to striking the coast. After landfall, Tropical Cyclone 02B weakened rapidly. Damage to the coastal villages in Bangladesh was substantial Officials reported 11 dead and at least fifty others missing as a result of heavy flooding and wind gusts of up to 65 kt (33 m/sec). The image above shows Tropical Cyclone 02B three hours after landfall (1903312 November DMSP visual imagery)



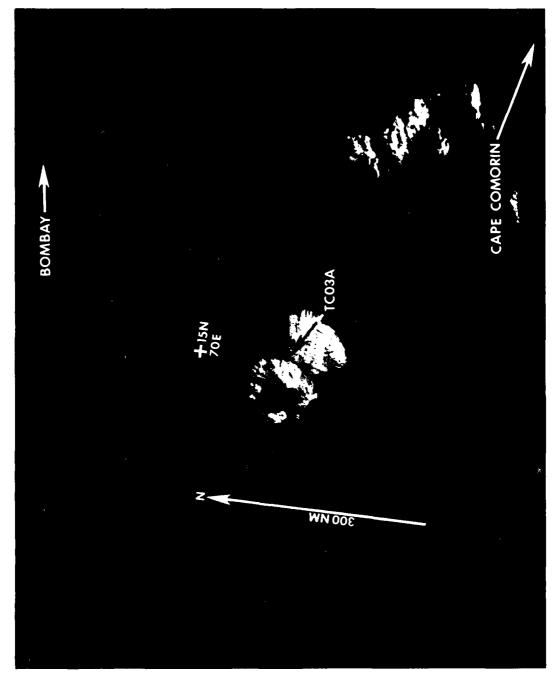


Figure 3-03A-1. Tropical Cyclone 03A was the only significant tropical cyclone to develop in the Arabian Sea in 1986. It was first carried on the Significant Tropical Cyclone Weather Advisory (ABIO PGTW) on November 1st when the area rapidly improved in organization. On November 2nd, the first Tropical Cyclone Formation Alert (TCFA) was issued. Shear over the disturbance suppressed development by separating the low-level circulation center and the upper-level anticyclone. On 6 November, the TCFA was cancelled after both the convection and organization had decreased. Satellite imagery indicated the anticyclone was no longer evident and the upper-level flow was unidirectional over the disturbance. However, on 8 November, redevelopment occurred. Dvorak intensity analysis of satellite imagery, at 080532Z, indicated winds of 35 kt (18 m/sec). Satellite imagery 12-hours later indicated winds of 45 kt (23 m/sec). ITWC issued its first warning on Tropical Cyclone 03A at 090600Z. Four hours after the first warning was issued, satellite imagery once again indicated shear over the cyclone with a separation of 75 nm (139 km) between the low-level and upper-level circulation centers. JTWC issued the final warning at 111200Z, after Tropical Cyclone 03A lost all of its convection. Tropical Cyclone 03A dissipated over water. There were no reports of damage. The satellite picture shows Tropical Cyclone 03A in the Arabian Sea one hour before the first warning was issued (090512Z November DMSP visual imagery)

CHAPTER IV - SUMMARY OF SOUTH PACIFIC AND SOUTH INDIAN OCEAN TROPICAL CYCLONES

1. GENERAL

Last year (1985) was the first year that southern hemisphere tropical cyclones were included in the Annual Tropical Cyclone Report. In retrospect, the JTWC area of responsibility (AOR) was expanded on 1 October 1980 -- to include the southern hemisphere from 180 degrees Longitude westward to the east coast of Africa. Details on tropical cyclones in this region for July 1980 to June 1982 are contained in Diereks et al, (1982). For the July 1982 through June 1984 period, reference the NOCC/JTWC TECH NOTE 86-1. As in earlier reports, data on tropical cyclones forming in, or moving into, the South Pacific Ocean east of 180 degrees Longitude, which is the Naval Western Oceanography Center (NAVWESTOCEANCEN) AOR, are included for completeness.

JTWC provides the sequential numbering for all South Pacific and South Indian Ocean significant tropical cyclones. The current convention (as stated

in USCINCPACINST 3140.1 (series)) for labelling tropical cyclones that develop in the South Indian Ocean (west of 135 degrees East Longitude) is to add the suffix "S" to the assigned tropical cyclone number, while those originating in the South Pacific Ocean (east of 135 degrees East Longitude) receive a "P" suffix. The "P" suffix also applies to significant tropical cyclones which form east of 180 degrees Longitude in the South Pacific Ocean. Also, it should be noted that to encompass the southern hemisphere tropical cyclone wason, which occurs from January through April, the limits of each tropical cyclone year are defined as 1 July to 30 June. Thus, the 1986 southern hemisphere tropical cyclone year is from 1 July 1985 to 30 June 1986. (This is in contrast to the convention of labelling northern hemisphere tropical cyclones which is based on the calendar year - 1 January to 31 December - to include the seasonal activity from May through December.)

TABLE 4-1.			SOUTH INDI TROPICAL C			
TROPICAL CYCLONE	PERIOD OF WARNING	CALENDAR DAYS OF WARNING	WARNINGS	SURFACE	ESTIMATED	BEST TRACK DISTANCE TRAVELED NM (K
018	23 SEP - 29 SEP	7	14	40 (21)	994	1470 (2722)
02S NICHOLAS	27 NOV - 07 DEC	11	21	75 (39)		1436 (2659)
03P	15 DEC - 16 DEC	2	3	35 (18)		1093 (2024)
04S DELIFININA	07 JAN - 16 JAN	10	19	110 (57)		1399 (2591)
OSS COSTA	07 JAN - 16 JAN	10	18	70 (36)		1684 (3119)
06s	08 JAN - 10 JAN	3	5	50 (26)		553 (1024)
07S OPHELIA	11 JAN - 13 JAN	3	Ś	35 (18)		317 (587)
08S	11 JAN - 14 JAN	4	7	35 (18)		900 (1667)
09S HECTOR	19 JAN - 24 JAN	5	10	45 (23)		447 (828)
10S PANCHO	21 JAN - 22 JAN	2	3	35 (18)		352 (652)
11P VERNON	23 JAN - 25 JAN	2	ų	50 (26)		901 (1669)
12P WINIFRED	29 JAN - 01 FEB	4	7	90 (46)		526 (974)
13S ERINESTA	31 JAN - 10 FEB	11	21	115 (59)		2282 (4226)
14S FILOMENA	06 FEB - 10 FEB	5	9	55 (28)		1020 (1889)
15P IMA	06 FEB - 14 FEB	9	18	75 (39)		2161 (4002)
16P JUNE	07 FEB - 09 FEB	2	5	55 (28)		825 (1528)
17P KELI	08 FEB - 10 FEB	3	5	45 (23)		1551 (2872)
18S RHONDA	19 FEB - 20 FEB	ž	4	55 (28)		855 (1583)
19S GISTA	19 FEB - 25 FEB	6	12	85 (44)		1558 (2885)
20S SELWYN	23 FEB - 25 FEB	3	6	55 (28)		707 (1309)
21S TIFFANY	27 FEB - 01 MAR	2	4	35 (18)		628 (1163)
22S VICTOR	03 MAR - 09 MAR	7	13	105 (54)		1715 (3176)
23P LUSI	03 MAR - 08 MAR	6	12	45 (23)		1527 (2828)
24P ALFRED	03 MAR - 04 MAR	2	2	30 (15)		1781 (3298)
24P ALFRED*	06 MAR - 09 MAR	3	7	45 (23)		
25S HONORININA	09 MAR - 16 MAR	8	16	110 (57)		2741 (5076)
25S HONORININA*	19 MAR - 20 MAR	2	3	35 (18)		
26S IARIMA	13 MAR - 15 MAR	3	4	35 (18)		317 (587)
27S JEFOTRA	26 MAR - 01 APR	ž	14	105 (54)		2114 (3915)
255 KRISOSTOMA	08 APR - 13 APR	5	10	75 (39)		1363 (2524)
SOP MARTIN	10 APR - 14 APR	5	11	75 (39)		1401 (2595)
30P	16 APR - 16 APR	í	2	30 (15)		760 (1408)
31S MANU	23 APR - 26 APR	4	7	70 (36)		546 (1011)
32S BILLY#	05 MAY - 12 MAY	8	14	95 (49)		1534 (2841)
33P NAMU	17 MAY - 23 MAY	6	13	85 (44)		1444 (2674)
	1986 TOTALS:	173	328	/		

^{*} REGENERATED

NOTE: NAMES OF CYCLONES GIVEN BY REGIONAL WARNING CENTERS (NANDI, BRISBANE, DARWIN, PERTH AND MAURITIUS) AND APPENDED TO JIWC WARNINGS, WHEN AVAILABLE.

^{*} TROPICAL CYCLONE 28S (KRISOSTOMA) WAS ALSO NAMED ALISON.

TROPICAL CYCLONE 32S (BILLY) WAS ALSO NAMED LILA.

2. SOUTH PACIFIC AND SOUTH INDIAN OCEAN TROPICAL CYCLONES

The 1986 year (1 July 1985 through 30 June 1986) was unusually active, with 33 tropical cyclones (see Table 4-1) reaching warning status. This did not exceed the total of 35 tropical cyclones for 1985 (1 July 1984 - 30 June 1985) which was the busiest year to date for JTWC. Three tropical cyclones occurred in the South Pacific, east of 165 degrees East Longitude, which is only half the long-term mean. The Australian area (105 to 165 degrees East Longitude) accounted for 16 tropical cyclones compared to the climatological mean of 10.3 - five more than normal. Fourteen tropical cyclones developed in the South Indian Ocean, which is nearly six more than the long-term mean of 8.4 cyclones (see Tables 4-2 and 4-3).

Meteorological satellite surveillance of tropical cyclones has been updating climatologies since the early 1960s. (This meteorological watch from space detects tropical cyclones that might have previously gone undetected over the conventional data sparse oceanic areas.) Thus, tropical cyclone climatologies should benefit from increased

surveillance from space in some areas, for example, the South Indian Ocean.


Caveat: Intensity estimates for southern hemisphere tropical cyclones are derived primarily from satellite imagery evaluation (Dvorak, 1984) and from intensity estimates reported by other regional centers. Only, in very rare instances are the intensity estimates based on surface observational data. Estimates of the minimum sea-level pressure are usually derived from the Atkinson and Holliday (1977) relationship between the maximum sustained one-minute surface wind and the minimum sea-level pressure (Table 4-4). This relationship has been shown to be representative for tropical cyclones in the western North Pacific and is also used by the Australian regional warning centers to provide intensity estimates. However, since these pressure estimates are usually based on wind intensities that were derived from interpretation of satellite imagery, considerable caution should be exercised when using these resultant pressure values in future tropical cyclone work.


YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC	TOTAL
(1959 - 1978) AVERAGE*				0.4	1.5	3.6	6.1	5.8	4.7	2.1	0.5		24.
1981	0	O	0	1	3	2	6	5	3	3	1	0	21
1982	1	0	0	1	1	2 3 3 5	6 9 5	4	3 2	3	1	0	25
1983	1	0	0	1	1	3		6	3	5	0	0	25
1984	1	0	0	1	2	5	5	10	4	2	0	0	30 35
1985	0	0	0	0 0	1	7	9	9 9	6	3	0 2	0	35
1986	0	0	1	0	1	1	9	9	8	4	2	0	3
(1981 - 1986)													
AVERAGE	0.5	0.0	0.2	0.7	1.5	3.5	7.2	7.2	4.3	3.3	0.7	0.0	28.
CASES	3	0	1	4	9	21	43	43	26	20	4	0	177


YEAR	(105E WESTWARD) SOUTH INDIAN	(105E-165E) Australian	(165E EASTWARD) SOUTH PACIFIC	TOTA
(1959 - 1978)				
AVERAGE*	8.4	10.3	5.9	24.6
				- 24
1981	13	. 8	3 2	2 4 25
1982	12	11		25 25
1983	7	6	12	
1984	14	14	2	30
1985	14	15	6	35
1986	14	16	3	33
(1981 - 1986)	12.3	11.7	4.7	28.7
AVERAGE	72.5			
CASES	74	70	28	172


TABLE 4-4. MAXIMUM SUSTAINED SURFACE WINDS VERSUS MINIMUM SEA-LEVEL PRESSURE (ATKINSON AND HOLLIDAY, 1977)


MAXIMUM SUSTAINED SURFACE WIND (KT)	EQUIVALENT MINIMUM SEA-LEVEL PRESSURE (MB)
30 35 40	
45 50 55 60	
65	972 967
85 90 95	
105 110 115	938 933 927
120	916 910 910
140	892 885
160 165 170	865

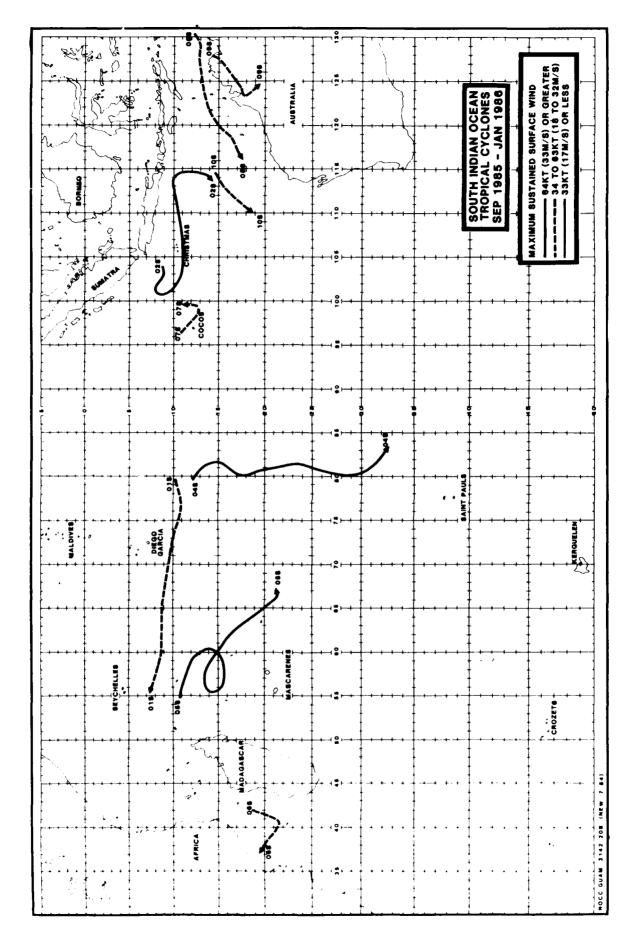

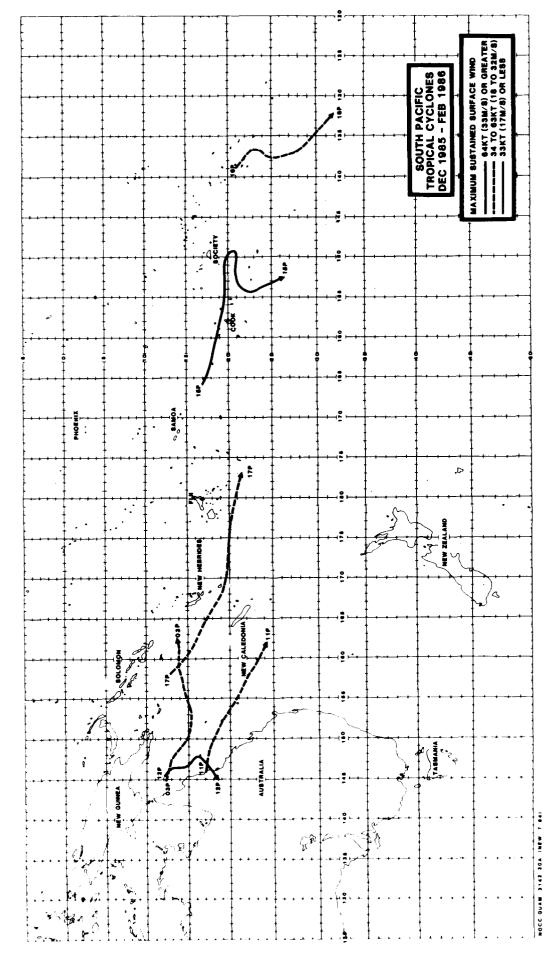

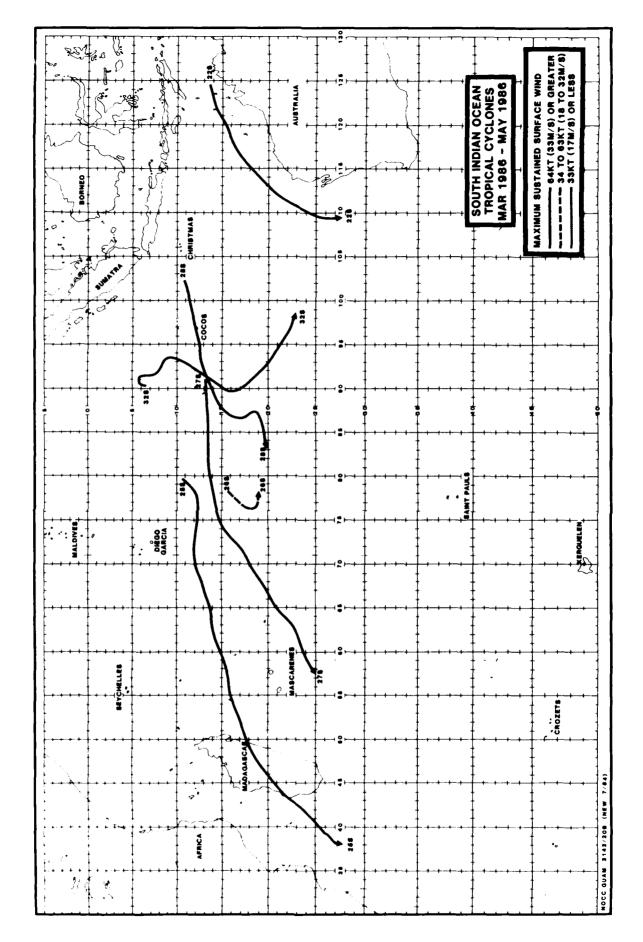

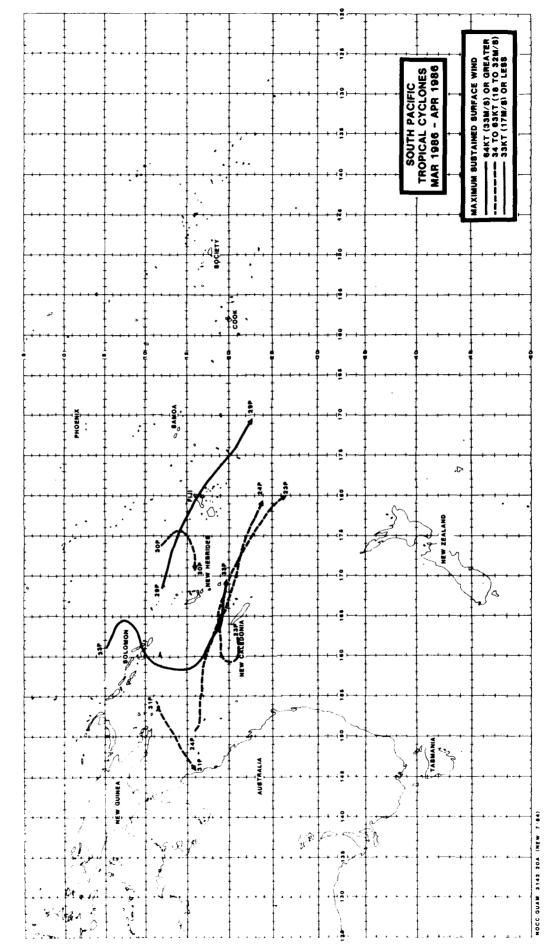

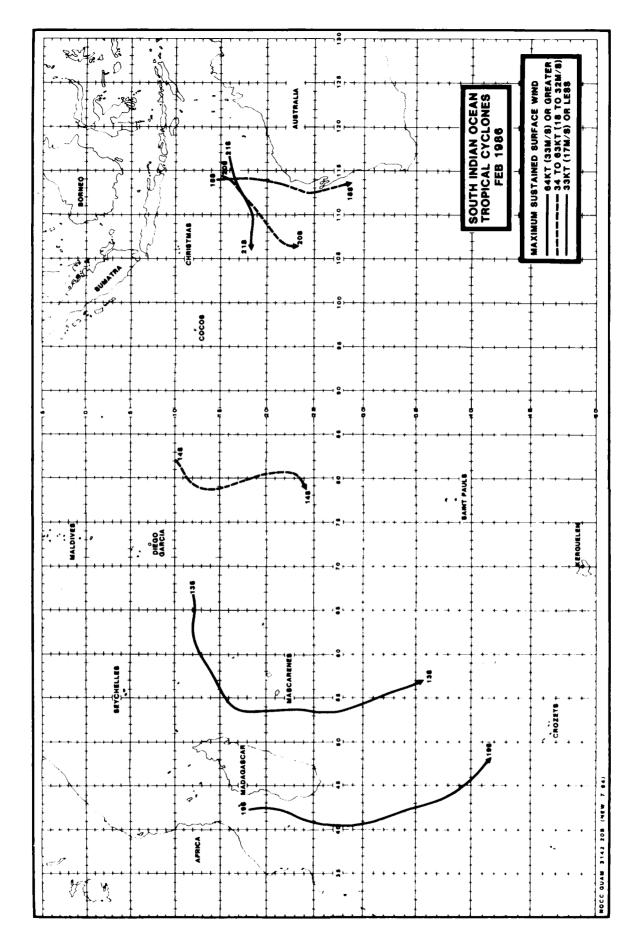

CHAPTER V - SUMMARY OF FORECAST VERIFICATION

1. ANNUAL FORECAST VERIFICATION

a. Western North Pacific Ocean

The position given for warming times and those at the 24-, 48- and 72-nour forecast times were verified against the final best track positions at the same valid times. The (scalar) forecast, cross track and along track errors (illustrated in Figure 5-1) were then calculated for each tropical cyclone and are presented in Tables 5-1A, 5-1B, 5-1C and 5-1D. Figure 5-2 provides the frequency distributions of forecast errors in 30 nm increments

for 24-, 48-, and 72-hour forecasts of all 1980 tropical cyclones in the western North Pacific. A summation of the mean forecast errors, as calculated for all tropical cyclones in each year, is shown in Table 5-2A. Table 5-2B includes cross track and along track errors for 1986. A comparison of the annual mean forecast errors for all tropical cyclones as compared to those tropical cyclones that reached typhoon intensity can be seen in Table 5-3. The mean and median forecast errors for 1986 as compared to the ten previous years are graphed in Figure 5-3.


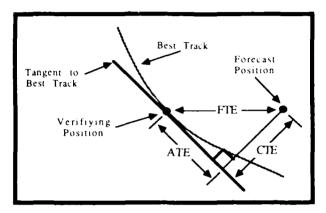


Figure 5-1. Definition of cross track error (CTE), along track error (ATE) and forecast track error (FTE). In this example, the CTE is positive (to the right of the Best Track) and the ATE is negative (behind or slower than the Best Track).

ICAL CYCLONE	ERROR	NUMBER OF WARNINGS
I) TY JUDY	16	21
) TY KEN	17	18
) STY LOLA	3.1	26
) TS MAC	13	15
I) TY NANCY	23	15
) TS OWEN	16	17
() STY PEGGY	11	35
) TY ROGER	12	19
() TS SARAH	55	22
) TY GEORGETTE	16	26
() TY TIP	24	25
() TS VERA #1	54	7
() TY VERA #2	17	48
() TY WAYNE	14	67
F) TY ABBY	19	30
) TY BEN	55	46
r) TY CARMEN	15	27 11
() TS DOM	25	
TY ELLEN	1 4 1 8	33 19
TY FORRETT	10	16
O TS GECRGIA	26	16
TS HERBERT	20 32	· 0
J. TS IDA 4: TY JCE	32 12	24
	15	52
N. STY KIM N. TS DEX	34	8
NO TY MARGE	3° 79	18
#)I MAROE #) TY NORRIO	17	41

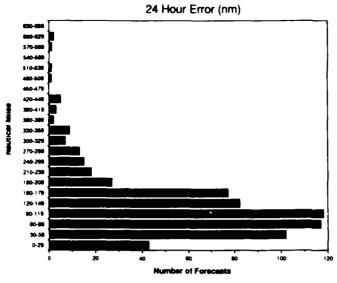

FORECAST ERRORS (NM)

	<u>24-nk</u>	40-HK	/ 2 - N K
MEAN:	121	261	394
MEDIAN:	121	255	383

STANDARD

DEVIATION: 89 183 254

CASES: 646 531 409

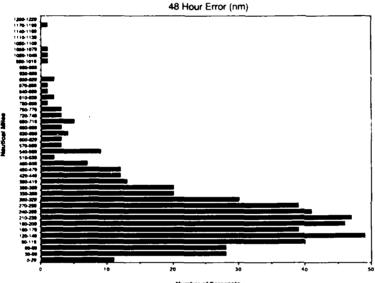


Figure 5-2. Frequency distribution of the 24-, 48-, and 72-hour forecast errors in 30 nm (56 km) increments for all significant tropical cyclones in the western North Pacific during 1986.

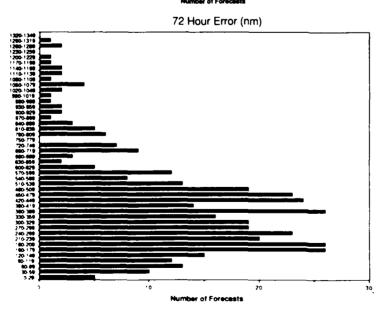


TABLE 5-18. 24-HOUR FORECAST ERROR SUPPLARY FOR THE WESTERN MORTH PACIFIC SIGNIFICANT TROPICAL CYCLONES OF 1986 (ERRORS IN MM)

TROPIC	AL CYCLONE	FORECAST ERROR	NUMBER OF	ALONG 1		CROSS 1	
			WARNINGS	ABS MAG .	BIAS **	ABS MAG .	BIAS
(01W)	TY JUDY	138	17	84	-56	93	-78
(WSO)	TY KEN	78	15	62	11	31	-16
(03W)	STY LOLA	1 30	22	104	-86	63	-43
(04W)	TS MAC	123	11	96	-56	55	11
(05W)	TY HANCY	104	11	95	-92	32	20
(06W)	TS OWEN	70	14	63	-15	22	-9
(07W)	STY PEGGY	68	31	36	-1	47	29
(08w)	TY ROGER	75	15	59	-19	33	-18
(O9W)	TS SARAH	273	18	208	-177	153	-104
(11E)	TY GEORGETTE	154	19	94	-78	87	-72
(10W)	TY TIP	180	23	114	-96	107	-107
(114)	TS VERA #1	150	5	76	27	123	122
(11W)	TY VERA #2	131	44	96	-67	76	29
(12W)	TY WAYNE	124	59	101	-89	54	0
(13₩)	TY ABBY	104	26	79	-37	51	38
(14W)	TY BEN	112	42	61	-2	81	-42
15W)	TY CARMEN	84	23	57	-17	54	18
(16W)	TS DOM	66	9	56	-12	74	-66
(17W)	TY KILLEN	78	29	42	-4	54	-2
(18W)	TY FORREST	196	16	171	-158	58	-17
(19W)	TS GEORGIA	92	14	67	-61	46	46
(SOM)	TS HERBERT	89	11	31	11	77	32
(214)	TS IDA	139	19	87	-66	84	-24
(22W)	TY JOE	169	22	85	24	142	62
(23W)	STY KIM	116	51	82	-36	76	13
(24W)	TS LEX	78	7	41	7	62	-48
(25W)	TY MARGE	1 30	33	92	-59	68	33
(26W)	TY MORRIS	118	39	84	-75	73	13
	TOTALS	121	645	85	-50	70	-4

Note: To measure forecast content with relation to a tropical cyclone track reference frame cross track and along track errors components have been generated in addition to the usual forecast errors. Specifics follow:

- 1. Cross track error component is a measure of how far a warning position is displaced left or right of the best track position. The samples consist of two parts: the absolute magnitude (distance) and the bias (negative values (minus sign) were left of track and positive values (plus sign) were right of track).
- 2. Along track error component is a measure of how far the warning position was displaced shead or behind the best track position. It also consists of two parts: the absolute magnitude (distance) and the bias (negative values (minus sign) were behind/slow and positive values (plus sign) were meas/fast).

TABLE 5-1C.	48-HOUR	POR BCAST	ERROR	SUPPLARY	FOR T	HE WESTE	RN MORTH	PACIFIC
	SIC	IFICANT	TROPIC	IL CYCLO	TES OF	1986 (RRORS IN	104)

TROPIC	AL CYCLOME	PORECAST ERROR	NUMBER OF	ALONG Err		CROSS Erf	
			WARNINGS	ABS MAG	BIAS	ABS MAG	BIAS
(01W)	TY JUDY	331	11	310	-316	85	-75
(02W)	TY KEN	178	14	125	-29	86	-88
(03W)	STY LOLA	326	18	292	-300	105	-70
(04H)	TS MAC	188	7	147	-22	103	-79
(05W)	TY NAMCY	198	7	180	-173	60	4.1
(06W)	TS OWEN	140	10	114	-64	72	-33
(07W)	STY PEGGY	172	27	100	8	117	110
(⊌80)	TY ROGER	105	9	83	-14	58	-38
(09W)	TS SARAH	671	14	507	-497	405	-394
(11E)	TY GEORGE	TTE 363	17	187	-63	267	-269
(10W)	TY TIP	447	18	362	-370	194	-191
(11W)	TS VERA P	1 226	1	207		91	
(11W)	TY VERA #	2 289	40	207	-137	169	71
(12W\	TY WAYNE	274	46	237	-215	109	45
(13W)	TY ABBY	160	22	94	9	107	81
(14W)	TY BEN	204	38	124	26	131	-3
(15W)	TY CARMEN	1 40	19	104	-70	68	14
(16W)	TS DOM	60	4	18	-4	50	-30
(17W)	TY ELLEN	159	25	65	17	1 35	4
(18W)	TY FORRES	rr 345	12	308	-257	124	-51
(19W)	TS GEORGI	A 226	12	192	-194	101	99
(20M)	TS HERBER	T 130	8	106	103	55	20
(21¥)	TS IDA	2 36	15	1 47	-123	1 47	-59
(22W)	TY JOE	508	18	227	-22	424	-3
(23W)	STY KIM	280	51	167	-62	210	-54
(S4A)	TS LEX	189	7	131	-117	112	-51
(25W)	TY MARGE	233	30	1 68	-97	139	89
(56A)	TY WORRIS	254	35	171	-151	168	108
	TOTALS	261	535	183	-115	151	-12

^{*} ARS MAG = Absolute Magnitude (distance)
** BIAS is the median (middle value) of the sample.

TABLE 5-10. 72-HOUR FORECAST ERROR SUMMARY FOR THE WESTERN MORTH PACIFIC SIGNIFICANT TROPICAL CYCLONES OF 1986 (ERRORS IN MM) CROSS TRACK FORECAST. NUMBER ALONG TRACK TROPICAL CYCLOWE ERROR ERROR ERROR WARNINGS ABS MAG BIAS ABS MAG -23 25 -27 (01W) TY JUDY 599 586 184 -594 80 288 179 127 (02W) TY KEN (03W) (04W) 581 14 560 -576 STY LOLA TS MAC 89 82 43 (05W) TY NAMCY 101 100 (06W) TS OWEN 128 67 -47 82 -17 23 5 8 (07W) STY PEGGY 163 154 257 252 101 (08W) (09W) 198 -155 -103 TY ROGER -540 TS SARAH 800 530 585 -594 (11E) TY GEORGETTE 374 219 101 -263 (10W) TY TIP 774 -518 420 TS VERA #1 -253 340 -10 36 38 18 363 (11W) TY VERA #2 196 468 390 -377 83 119 (12¥) TY WAYNE 147 (13¥) (14¥) TY ABBY 225 139 TY BEN -1 33 73 17 (15W) TY CARMEN -138 (16W) 24 17 ---36 227 (17V) TY ELLEN 291 139 -388 172 -176 TY FORREST (18W) (19W) 427 353 354 -356 205 202 TS GRORGIA 402 TS HERBERT 217 134 133 -28 (20W) (21W) TS IDA 205 (22W) TY JOE 113 -104 14 334 317 -246 -153 143 355 366 (23W) STY KIM 488 -369 183 416 (24W) (25W) TS LEX TY MARGE 180 -105 150 288 (26W) TY WORRIS 334 31 214 -151 224 214 394 412 276 227 -12 -170 TOTALS

	24	-HOUR	48	-HOUR	72-HOUR		
YEAR	FORECAST	RIGHT-ANGLE	PORECAST	RIGHT-ANGLE	FORECAST	RIGHT-ANGL	
1971	111	64	212	118	317	117	
1972	117	72	245	146	381	210	
1973	108	74	197	134	253	162	
1974	120	78	226	157	348	245	
1975	1 38	84	2 88	181	450	290	
1976	117	71	230	132	338	202	
977	1 48	83	283	157	407	228	
1978	127	75	271	179	410	297	
979	1 24	77	226	151	316	223	
980	126	79	243	164	389	287	
1981 *	123	75	220	119	334	168	
982 •	113	67	237	139	341	206	
983 *	117	72	259	152	405	237	
984 *	117	66	233	137	363	231	
985 *	117	66	231	1 34	367	214	
1986	121	••	261	**	394	**	

THE TECHNIQUE FOR CALCULATING RIGHT-ANGLE ERROR WAS REVISED IN 1981; THEREFORE, A DIRECT CORRELATION IN RIGHT-ANGLE STATISTICS CANNOT BE MADE FOR THE ERRORS COMPUTED BEFORE 1981 AND THE ERRORS COMPUTED SINCE 1981.

IN 1986 RIGHT-ANGLE ERROR WAS REPLACED BY CROSS TRACK ERROR (SEE FIGURE 5-1 FOR THE DEFINITION OF CROSS TRACK ERROR).

	CROSS	TRACK	ALONG	TRACK
	ABS MAG	BIAS	ABS MAG	BIAS
121	70	(-4)	85	(-50)
261	151	(-12)	183	(-115)
394	227	(-12)	276	(-170)
	-	RECAST ABS MAG 121 70 261 151	121 70 (-4) 261 151 (-12)	RECAST ABS MAG BIAS ABS MAG 121 70 (-4) 85 261 151 (-12) 183

	_				_	
YEAR	ALL 2	TYPHOON®	ALL	48-HOUR TYPHOON*	ALL 7	72-HOUR TYPHOON®
1950-1958		170		2/5 45		
1959		117 ••		267 **		
1960		177 ••		354 **		
1961		136		274		
1962		144		287		476
1963		127		246		374
1964		133		284		429
1965		151		30 3		418
1966		1 36		280		432
1967		125		276		41 4
1968		105		229		3 37
1969		111		237		349
1970	104	98	190	181	279	272
1971	111	99	212	203	317	308
1972	117	116	245	245	381	382
1973	108	102	197	193	253	245
1974	1 20	114	226	218	348	357
1975	138	129	288	279	450	442
1976	117	117	230	232	338	336
1977	148	140	283	266	407	390
1978	127	1 20	271	241	410	459
1979	124	113	226	219	316	319
1980	126	116	243	221	389	362
1981	123	117	220	215	334	342
1982	113	114	237	229	341	337
1983	117	110	259	247	405	384
1984	117	110	233	228	363	361
1985	117	112	231	228	367	355
1986	121	117	261	261	394	+03

Forecasts were verified when the Tropical Cyclone intensities were over 35

Western North Pacific Errors

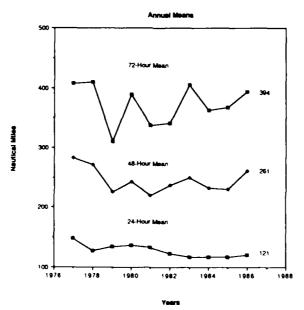


Figure 5-3. Annual mean forecast errors (in nm) for all tropical cyclones in the western North Pacific.

^{**} Forecast positions north of 35 degrees North Latitude were not verified

b. North Indian Ocean

The positions given for warning times and those at the 24-, 48-, and 72-hour valid times were verified for tropical cyclones in the North Indian Ocean by the same methods used for the western North Pacific. It should be noted that due to low number of North Indian Ocean tropical cyclones, these error statistics should not be taken as representative of any trend. Table

5-4 is the forecast along track and cross track error summary for the North Indian Ocean. Table 5-5A contains a summary of the annual mean forecast errors for each year. Table 5-5B includes cross and along track error for 1986. Forecast errors are plotted in Figure 5-4 (Seventy-two hour forecast errors were evaluated for the first time in 1979). There were no verifying 72-hour forecast in 1983 and 1985.

	1	INITIAL F	POSITION			
TROPICAL CYCLONE	EHROR		UMBER O	•		
TC 01B	36 70		, - 2			
TC 93A	78		9			
	MEAN 52	TOTAL	28			
	i	4-HOUR F	ORECAST	S		
TROPICAL CYCLONE	FORECAST ERROR			TRACK ROR	CROSS ERR	
				BIAS	ABS MAG	
TC 01B TC 02B	78		59	-56	46	-41
TC 03A	259		247	-250	69	68
MEAN	134		118	-117	53	-7
	4	8-HOUR F	ORECAST	s		
TROPICAL CYCLONE	FORECAST ERROR		ER	TRACK	CROSS ERR	OR
			BS MAG	BIAS	ABS MAG	BIAS
TC 01B TC 02B	129		89	-89	74	-75
TC G3A	401		384	N/A ·	113	N/A
	168		131	-89	80	-75
MEAN						
MEAN	7	2-HOUR F	ORECAST	5		
TROPICAL	PORECAST ERROR	-	ALONG	TRACK	CROSS CROSS	
MEAN TROPICAL CYCLONE	PORECAST		ALONG ERI		CROSS ERRE ABS MAG	OR
TROPICAL CYCLONE TC 018	PORECAST ERROR 269	. <u>.</u>	ALONG ERF BS MAG	TRACK FOR BIAS	ABS MAG	BIAS
TROPICAL CYCLONE	PORECAST ERROR	. <u>.</u>	ALONG ERF BS MAG	TRACK ROR BIAS	ABS MAG	BIAS

	2	-HOUR	48	-HOUR	72	-HOUR
YEAR	PORECAST	RIGHT-AMGLE	PORECAST	RIGHT-ANGLE	PORECAST	RIGHT-ANGL
1971 *	232		410			
1972 .	224	101	292	112		
1973 *	182	99	299	160		
1974 .	137	81	238	146		
1975	1 45	99	228	144		
1976	138	108	204	159		
1977	122	94	292	214		
1978	133	86	202	128		
1979	151	99	270	202	437	371
1980	115	73	93	87	167	126
1981 **	109	65	176	103	197	73
1982	138	66	368	175	762	404
1983 **	117	46	153	67		
1984 **	154	71	274	127	388	159
1985 **	123	51	242	109		
1986	134		168	***	269	***

JTWC AREA OF RESPONSIBILITY UNTIL THE 1975 TROPICAL CYCLOME SEASON.

THE TECHNIQUE FOR CALCULATING RIGHT-ANGLE ERROR WAS REVISED IN 1981; THEREFORE, A DIRECT CORRELATION IN RIGHT-ANGLE STATISTICS CANNOT BE MADE FOR THE ERRORS COMPUTED BEFORE 1981 AND THE ERRORS COMPUTED SINCE 1981.

IN 1986 PICHT-ANGLE ERROR WAS REPLACED BY CROSS TRACK ERROR (SEE FIGURE 5-1 FOR THE DEFINITION OF CROSS TRACK ERROR).

TABLE 5-5B. FORECAST ERROR:			AN FORECAST ERR RORS IN NAUTICA		NORTH INDIAN	OCEAN
YEAR	24-H	OUR	48-н	IOUR	72-H	OUR
1986	13	4	16	58	26	9
CROSS TRACK ERRO	R:					
	24-H	OUR	48-H	IOUR	72-H	OUR
YEAR	ABS MAG	BIAS	ABS MAG	BIAS	ABS MAG	BIAS
1986	53	-7	80	-49	180	-182
ALONG TRACK ERRO	OR:					
	24-H	OUR	48-H	IOUR	72-H	OUR
YEAR	ABS MAG	BIAS	ABS MAG	BIAS	ABS MAG	BIAS
1986	118	-118	131	-134	189	-190

North Indian Ocean Forecast Errors

Annual Means 800 24 Hour Mean 48 Hour Mean 72 Hour Mean 100 1076 1076 1078 1080

Figure 5-4. Annual mean forecast errors (in nm) for all tropical cyclones in the North Indian Ocean.

Years

c. South Pacific and South Indian Oceans

Verification statistics for forecasts in the southern hemisphere can be obtained from the raw data sets addressed in Annex A. $\,$

2. COMPARISON OF OBJECTIVE TECHNIQUES

a. General

Objective techniques used by $\ensuremath{\mathsf{JTWC}}$ are divided into five main categories:

- (1) extrapolation;
- (2) climatological and analog techniques;
- (3) model output statistics;
- (4) dynamic models; and
- (5) empirical and analytical techniques;

In September 1981, JTWC began to initialize its array of objective forecast techniques (described below) on the six-hour old preliminary best track position (an interpolative process) rather than the forecast (partially extrapolated) warning position, e.g. the 06002 warning is now supported by objective techniques developed from the 00002 preliminary best track position. This operational change has yielded several advantages:

*Techniques can now be requested much earlier in the warning development time line, i.e. as soon as the track can be approximated by one or more fix positions after the valid time of the previous warning;

*Receipt of these techniques is virtually assured prior to the development of the next warning; and

*Improved (mean) forecast accuracy. This latter aspect arises because JTWC now has more reliable approximation of the short-term tropical cyclone movement. Further, since most of the objective techniques are biased towards persistence, this new procedure optimizes their performance and provides more consistent guidance on short-term movement, indirectly yielding a more accurate initial position estimate as well as lowering 24-hour forecast errors.

b. Description of Objective Techniques

- (1). XTRP -- Forecast positions for 24- and 48-hours are derived from the extension of a straight line which connects the most recent and 12-hour old preliminary best track positions.
- (2). CLIM A climatological aid providing 24-, 48-, and 72-hour tropical cyclone forecast positions (and intensity changes in the western North Pacific) based upon the position of the tropical cyclone. The output is based upon data records from 1945 to 1981 for the western North Pacific Ocean and 1900 to 1981 for the North Indian Ocean.
- (3). TPAC Forecast positions are generated from a blend of climatology and persistence. The 24- and 48-hour positions are equally weighted between climatology and persistence and three quarters climatology and persistence, respectively; the 72-hour position is one quarter persistence and three quarters climatology. Persistence is a straight line extension of a line connecting the current and 12-hour old positions. Climatology is based on data from 1945 to 1981 for the western North Pacific Ocean and 1900 to 1981 for the North Indian Ocean.
- (4). TYAN An updated analog program which combines the earlier versions TYFN 75 and INJAN 74. The program scans a 30-year climatology with a similar history (within a specified acceptance envelope) to the current tropical cyclone. For the western North

Pacific Ocean, three forecasts of position and intensity are provided for 24-, 48-, and 72-hours: RECR - a weighted mean of all tropical cyclones which were categorized as "recurving" during their best track period; STRA - a weighted mean of all accepted tropical cyclones which were categorized as moving "straight" (westward) during their best track period: TOTL - a weighted mean of all accepted tropical cyclones, including those used in the RECR and STRA forecast. For the North Indian Ocean, a single (total) forecast track is provided for the 12-hour intervals to 72-hours.

- (5). COSMOS A model output statistics (MOS) routine based on the geostrophic steering at the 850-, 700-, and 500-mb levels. The steering is derived from the HATTRACK point advection model run on Global prognostic fields from the FLENUMOCEANCEN's NOGAPS prediction system. The MOS forecast is then blended with the 6-hour past movement to generate the forecast track.
- (6). One-way Interactive Tropical Cyclone Model (OTCM) A coarse-mesh, three-layer in the vertical, primitive equation model with a 205km grid spacing over a 6400 x 4700 km domain. The model's fields are computed around a bogused, digitized cyclone vortex using FLENUMOCEANCEN's Numerical Variational Analysis (NVA) or NOGAPS prognostic fields for the specified valid time. The past motion of the tropical cyclone is compared to initial steering fields and a bias correction is computed and applied to the model. FLENUMOCEANCEN's NOGAPS global prognostic fields are used at 12-hour intervals to update the model's boundaries. The resultant forecast positions are derived by locating the 850 mb vortex at six-hour intervals to 72-hours.
- (7). Nested Tropical Cyclone Model (NTCM) A primitive equation model with properties similar to the OTCM. The NTCM differs by containing a finer scale "nested "grid, initializing on NVA analysis fields only, not containing a (persistence) bias correction, and being a channel model which runs independent of FLENUMOCEANCEN's prognostic fields (i.e., it does not require updating of its boundaries). The "nested grid" covers a 1200 x 1200 km area with a 41 km grid spacing which moves within the coarse-mesh domain to keep an 850 mb vortex at its center.
- (8). TAPT An empirical technique which utilizes upper-tropospheric wind fields to estimate acceleration associated with the tropical cyclone's interaction with the mid-latitude westerlies. It includes guidelines for the duration of acceleration, upper-limits, and probable path of the cyclone.
- (9). CLIPER -- A statistical regression technique based on climatology, current intensity, position and past movement. This technique is used as a crude measure of real forecast skill when verifying forecast accuracy.
- (10). THETA-E An empirically derived relationship between a tropical cyclone's minimum sea-level pressure (MSLP) and 700 mb equivalent potential temperature (Theta-E) was developed by Sikora (1976) and Dunnavan (1981). By monitoring MSLP and trends, the forecaster can evaluate the potential for sudden, rapid deepening of a tropical cyclone.
- (11). WIND RADIUS -- Following an analytical model of the radial profiles of sea-level pressures and winds in mature tropical cyclones (Holland, 1980),

a set of radii for 30-, 50-, and 100-knot winds based on the tropical cyclone's maximum winds have been produced to aid the forecaster in determining forecast wind radii.

(12). DVORAK — An estimation of tropical cyclone's current and 24-hour forecast intensity is made from interpolation of satellite imagery (DVORAK, 1984) and provided to the forecaster. These intensity estimates are used in conjunction with other intensity-related data and trends to forecast tropical cyclone intensity.

JTWC uses TPAC, TAPT, TYAN78, COSMOS, OTCM and NTCM operationally to develop track forecasts.

c. Testing and Results

A comparison of selected techniques is included in Table 5-6 for all western North Pacific tropical cyclones, Table 5-7 for all North Indian Ocean tropical cyclones. In these tables, " x-axis " refers to techniques listed vertically. For example (Table 5-6) in the 470 cases available for a (homogeneous) comparison, the average forecast error at 24-hours was 124 nm (230 km) for RECR and 110 nm (204 km) for COSM. The difference of 14 nm (26 km) is shown in the lower right. (Differences are not always exact, due to computational round-off which occurs for each of the cases available for comparison).

TABLE 5-6. 1986 ERROR STATISTICS FOR SELECTED OBJECTIVE TECHNIQUES IN THE WESTERN NORTH PACIFIC OCEAN

24-BOUR FTE MEAN ERRORS (N. MI)

							24-B	OUR F	I HEA	N ERRO	RS (N	MI)										
	JIW		NTC	ж	CLI	P	OTC	ж	cst	м	REC	R	701	řL	cos	Н	TP	AC .	CL	TH	XT	₹P
JTWC	122	122											Г	NUMBI		-AXIS	7					
NTCM	529 127	121	544 129	129									 	Y-AXI	' '	ERROR	7					
CLIP	490 126	121 5	502 126	127 -1	502 126	126							1	ECRN 10	UE DIF	FERENCE (- K)	•					
OTCM	589 125	120	514 126	126	475 125	123	603 126	126							_							
CSUM	498 111	122 -11	431 112	125 -13	407 113	127 -14	501 110	125 -15	505 111	111	/											
RECR	576 126	121 5	499 130	127	463 127	125	561 124	123	470 124	110	589 128	128										
TOTL	589 128	121	510 131	127	472 128	124	575 125	125 0	483 125	110 15	588 130	128	603 129	129 0								
COSM	583 121	119	505 123	123	480 123	124 -1	567 120	124 -4	492 122	110 12	555 122	120	566 122	121	593 121	121						
TPAC	593 128	121	512 130	125 5	475 128	123 5	578 125	126 -1	489 126	111 15	571 129	126 3	585 128	128 0	572 121	121	607 129	129 0				
CLIM	593 171	121 50	512 171	125 46	4 75 171	123 48	578 168	126 42	489 173	111 62	571 168	126 42	585 168	128 40	572 163	121 42	607 171	129 42	607 171	171 0		
XTRP	597 129	120	516 134	126	477 131	123 8	582 128	126	492 129	111	571 134	126	585 132	128	575 125	121 4	607 133	129	607 133	171 -38	611	133
						48-R	OUR FT	E HEA	N ERR	ORS (N	. M I)											
JIWC	JTW 528	260	NTC	H	CLI	P	orc	:н	cst	м	REC	R	101	rL	cos	М	TPJ	<u></u>	CL	IM_	XTI	KP
NTCM	260	258	466	276											JTWC -							
CLIP	269	11 254	276	271	432	269									CLIP -	CLIPER ONE-WA	(CLI	matolgy PICAL	CYCLOME	PERMINT	.	
OTCM	261 469	7 256	269 432	-2 270	269 402	261	505	231							RECR -	TOTAL	AHALO	ALOG (TYAN 7 N 70)	6 }	}	
CSUM	224 398	-32 261	228 362	-42 270	225 345	-36 269	231	224	424	227					CLIM -	CLIMA	TOLOGY	AND 1				
RECR	225 476	-36 259	223	-47 271	220	-49 264	475	226	227 399	221	510	265			XTRP -	12-800	TR EXT	RAPOLAT	LION	-		
TOTL	262 485	3 259	263 439	-8 271	257	-7 264	260	34 229	268 407	47 223	265 508	266	519	265								
COSM	262 475	3 256	259 433	-12 263	251 415	-13 266	260 472	31 226	268	45	267 480	1 259	265 486	257	507	249						
TPAC	248 485	-8 258	247 439	-16 268	244	-22 263	243	17	244	227	250 492	263	251 501	-6 262	249	250	520	255				
SLIM	247 485	-11 258	248	-20 268	240	-23 263	247	17 230	255	28	251 492	-12 263	250	-12 262	245	-5 250	255 520	255	520	316		
XTRP	30 6 48 6	48	311	43	308	45 263	314	84 230	328	101	308 492	45	308	46 262	307	57 250	31 6 520	61 255	316 520	316	521	299
*	292	34	289	21	278	15	290	60	299	72	298	35	297	35	298	38	299	- 44	299	-17	299	
	Jīw	c	NTC	м	CLI		.0 0r f1 0 1 0	TE MRA	N ERR		. MI)	· R	то:	TI.	cos	: M	TP	. c	CL	T M	XT	g p
JTWC	406	392		··		<u> </u>								<u> </u>		···						<u>. </u>
NTOM	332 438	396 42	386 457	45 7																		
CLIP	312 414	397 17	363 430	460 -30	363 430	430																
ofom	315 348	404	318 356	449	300 354	414	369 355	355														
0817 H	283	401	288	458	279	429	301	347	335													
RE"F	346 360	-55 397	349 355	-110 455	336	426	346	-1 349	314	342	416	423										
T071	367	17 399	426 363	-29 455	425 341	-1 427	423 349	74 351	439 320	97 345	414	422	424	406								
TOSM	397	-11 398	399 358	-56 450	393	- 34 428	409 343	58 352	418 324	73 351	408 389	423	406 398	402	414	431						
TPAC	368	31 397	361	448	430 341	425	349	47 355	406 322	55 350	435 398	421	435	404	431 396	437	423	376				
SLIM	341	-56 397	376 361	- 72 448	375	-50 425	380 349	25 355	388	38 350	369 398	- 52 421	407	404	377	437	376 423	376	423	41.7		
XTRP	371 364	-26 395	421 355	-27	335	422	42B 344	73 357	437 318	97 350	394	-14 419	401	402	419 392	18	417	374	417	414	41 R	4 ' 9
	469	73	463	16	461	39	470	113	498	148	476	57	477	75	472	3.2	477	103	477	63	479	`

TABLE 5-7. 1986 ERROR STATISTICS FOR SELECTED OBJECTIVE TECHNIQUES IN THE NORTHERN INDIAN OCEAN

24-BOUR PTE HEAM ERRORS (M. MI)

	J	WC	100	C)(ON	RI	CD.	70	TL	TI	AC .	Cl	.IM	Y?	RP
JTMC	16 134	134											_			
														OF		-ARIS
MT CM	13	138	15										- 1	CASES		RROR
	137	-1	137	0									L			
OTCM	11	160	•	178	11	277								Y-AXIS		RROR
	277	117	271	93	277	Ö							"	ENBOR CENIQUE		FERENCI - E)
RECR	12	141	12	150	9	270	14	143								
	140	-1	145	-5	150		143	0								
TOTL		189		191	6	303	10	177	10	177	_					
	182	-7	190	-1	199	-104	177	0	177	0						
TPAC	15	140	14	146	11	277	14	143	10	177	17	161				
	164	24	163	17	180	-89	156	13	201	24	161	0				
CLIM	15	140	14	146	11	277	14	143	10	177	17	161	17	176		
	183	43	179	33	211	-66	177	34	233	56	176	15	176	0		
XTRP	15	140	14	146	11	277	14	143	10	177	17	161	17	176	17	153
	153	13	155	9	173	-104	140	-3	174	-3	153	-8	153	-23	153	0

48-ROUR PTE MEAN ERRORS (M. MI)

	J	WC .	MI	CH	•	rax	RE	COR_	70	TL	1	PAC	CI	IM	XT	RP
JTWC	7 168	168							-	77		OFFICIA				
MICH	6 208	129 79		199						P.S	CH -	MESTED OME-MAY RECURVE: TOTAL A	TROPIC R AMALO	AL CYC	LOME N	
OTCM	2 528	134 394	2 528	254 274		52 8 0				CI.	AC -		LOGT A	ED PER	SISTEMO	R MLEW
RECR	4 232	200 32	3 157	247 -90		602 -436	5 249	249 0				11-200		-	•	
TOTL	1 459	401 58	0	0	0	0	2 387	387 0		387 0						
TPAC		179 -17	7 118	209 -91		528 -430	5 211		370			174 0				
CLIM		179 -1	7 102	209 -107	2 68	528 -460	5 207		2 408		9 170	174 -4	9 170			
XTRP	6 172	179	7	209		52 8	5	249	2 345		196	174	196	170	196	196

72-EOUR FTE MEAN ERRORS (M. MI)

	J	WC.	HT	COM	O	CH	TP	NC _	CL	IM_	XII	R.P
JTWC		269 0										
PTCK		269 169		438 0								
OTCH	1 1015		1 1015			1015						
TPAC		286 -144		451 -309		1015 -833	142					
CLIM		286 -134		451 -299		1015 -849		142 10	152			
XTRP		286 -90		451 -255		1015 -786	196		4 196	152 44	4 196	196

CHAPTER VI - NAVENVPREDRSCHFAC TROPICAL CYCLONE SUPPORT SUMMARY

The Advanced Tropical Cyclone Model (ATCM)

(Hodur, R.M., NAVENVPREDRSCHFAC)

The Advanced Tropical Cyclone Model (ATCM) is being developed to improve forecasts of tropical cyclone paths to 72-hours. The ATCM is really the Navy Operational Regional Atmospheric Prediction System (NORAPS) redesigned to run optionally as a tropical cyclone model. Given this redesign, NORAPS can produce forecasts each watch for a given region, such as the tropical western Pacific, and if the ATCM option is included, any and all, tropical storms present in the forecast domain will be bogused into the initial fields. The forecast storm position(s) will be computed in the model at some selected interval and sent to JTWC upon completion of the forecast. Forecast fields (e.g., sea-level pressure, mean Planetary Boundary Layer (PBL) winds) can be sent also, as is currently done for all NORAPS areas.

Although the redesign of NORAPS to function as the ATCM is complete, the exact method of bogusing the tropical storm has not yet been determined. Currently, four methods of bogusing the tropical storm are being evaluated. Other tests are being conducted to evaluate the significance of interactions between storms which occur in multiple storm situations. Upon completion of these tests, the bogusing method which produces the smallest forecast errors will be incorporated into the ATCM and the system will be ready for operational evaluation.

Tropical Cyclone Prediction Research

(Elsberry, R.L. and J.E. Peak, NAVPOSTGRADSCH)

In view of high personnel turnover of the JTWC forecasters, more objective approaches to the tropical cyclone forecasting processes are being developed. The performance of different tropical cyclone forecast aids (NTCM, OTCM, RECR, TOTL, CY50) for various cyclone characteristics and different environmental conditions has been evaluated. The factors affecting the accuracy of objective forecast aids are being incorporated into a decision tree to assist the forecaster in following a logical and reasonable path in selecting the appropriate aid in a given situation. A post-processing scheme for adjusting the OTCM predictions, which achieved a 30% reduction in 72-hour forecast error on the dependent sample is proposed for operational testing. An objective method for determining the warning position from a variety of fixes has been given to NEPRF for testing.

would be unwarranted at lower risk levels. A rule for deciding such actions can be derived on an expected outcome basis (e.g. cost/benefits ratio). The CHARM model is now being adapted for seven North Pacific sites: Pearl Harbor, Guam, Subic Bay, Buckner Bay, Yokosuka, Sasebo, and Pusan.

Evaluation Of JTWC Objective Aids

(Toui, T.L., and R.J. Miller, NAVENVPREDRSCHFAC)

The objective aid forecasts used at the Joint

Typhoon Warming Center (JTWC) during the 1978-85 period are evaluated. Forecast accuracy is judged on error measures of forecast error, cross-track error, and along-track error. The evaluation includes the consistency, as well as the accuracy, of the objective aid forecasts. In addition, the data are stratified according to season, maximum storm intensity, and storm path type for a more detailed error analysis. During the first eight-year period (1978-85), HPAC, the climatology/persistence model, and OTCM, a dynamical model, emerged as the best and most consistent aids.

Results also show that the forecasters at JTWC can assimilate the wealth of objective aids and provide reliable forecast guidance. When storms move erratically or fail to attain typhoon strength, JTWC forecasts are superior than the objective aids.

Automated Tropical Cyclone Forecasting System

(Miller, R.J., and T.L. Tsui, NAVENVPREDRSCHFAC)

The Automated Tropical Cyclone Forecasting (ATCF) system is an IBM PC compatible software package currently being developed for the Joint Typhoon Warning Center (JTWC). ATCF is designed to allow JTWC forecasters to display graphically tropical cyclone forecast information, merge and analyze synoptic wind fields, provide objective fix guidance, select optimum objective forecast aid, and expedite the issuance of tropical cyclone warnings. One great advantage of using ATCF is the standardization of the tropical cyclone forecasting procedures, so that during the course of the tropical cyclone warming preparation, forecasters will not neglect consideration of any

decisional steps or available options. ATCF automatically saves all tropical cyclone data, computes the real-time and post-storm statistics, and allows forecasters to randomly access any past storm data. A communication package included in ATCF simplifies the data transfer procedure between JTWC and Fleet Numerical Oceanography Center in Monterey, California.

When the ATCF is fully developed, it can be used as a training aid to simulate the actual Tropical Cyclone Inner Regional Circulation Classification

(Gray, W.M, Colorado State University)

The goals of the project are 1) to analyze the details of inner 270 nm (500 km) radial and vertical structure of tropical cyclones of the western North Pacific, and 2) to determine the various classes of inner region circulations. The results are expected to assist in determining the proper inner core circulation bogusing method in the initialization procedure of the new Advanced Tropical Cyclone Model.

Aircraft reconnaissance data will be used for knowledge of the inner 150 nm (278 km) radius eyclone circulation at lower tropospheric levels. Rawinsonde and Japanese Geostationary Meteorological Satellite (CMS) satellite data will be used for information on the circulation characteristics (with some overlapping) between 150-270 nm (278-500 km) radii and for estimates of the vertical resolution of the

cyclone circulation at all radii. It is anticipated that there are four or five distinctive inner cyclone circulation patterns which need to be documented for analytic incorporation into the numerical model.

Navy Tactical Applications Guide (NTAG), Vol. 6

(Fett, R.W., NAVENVPREDRSCHFAC)

An effort is now underway to develop a series of examples demonstrating the use of high quality satellite data for analysis and forecasting in the tropics. Both polar orbiter and geostationary satellite data are used to study the evolution of certain weather effects or of a particular weather phenomenon at a given time.

These examples are intended for publishing in the NTAG volume 6, Part I, Tropical Weather Analysis and Forecast Applications, and Volume 6, Part II, Tropical Cyclone Weather Analysis and Forecast Applications. NTAG Volume 6, Part I is presently in the publishing process. Distribution is anticipated in early 1987. Part II is still in the research process. Publication is anticipated in 1988/89.

Tropical Cyclone Condition Setting Aid

(Jarrell, J.D., Sci. Appl. International Corporation)

The tropical cyclone wind probabilities formed the basis for the development of a model to aid in threat analysis and decision making. The cyclone Hurricane Acceptable Risk Model (CHARM) developed by Jarrell assumes that at some high risk or high probability level, decision makers would order tropical cyclone condition evasion actions that tropical cyclone warning procedure. New forecasters can gather valuable hands-on experience of the warning procedure during their training period.

North Pacific Tropical Cyclone Climatology

(Miller, R.J. and T.L. Tsui, NAVENVPREDRSCHFAC)

A tropical cyclone climatology for the North Pacific has been developed and now is being reviewed by EGPACOM. Data used for the western basin were taken from the JTWC tropical cyclone data base and covered a period of 40 years, 1945-84. Eastern basin data spanned the 34 years period 1949-82 and were obtained from the consolidated world-wide tropical cyclone data base at National Climatic Data Center, Asheville, N.C.

Storms for both basins were sorted according to month/day of the year into twenty four 31-day overlapping periods. For each period, four charts are supplied: 1) actual storm paths; 2) mean storm paths 3) average storm speed; and 4) storm constancy and frequency.

Evaluation Of CSUM Objective Aid

(Tsui, T.L. and R.J. Miller, NAVENVPREDRSCHFAC)

CSUM is a statistical tropical cyclone prediction model developed by Matsumoto and Gray (Colorado State University), and was implemented into the JTWC combined ARQ procedure in September 1985. Preliminary results of all 35 storms since implementation indicate that CSUM gives good objective guidance. The mean 72-hour forecast error for CSUM was 303 nm (561 km) compared to 315 nm (583 km) and 330 nm (611 km) for COSMOS and OTCM respectively for the same period. In a head-to-head comparison, CSUM had a lower mean error than all other objective aids. The median 72-hour cross-track and along-track errors indicate that CSUM possesses no track bias but is one of the slower techniques in terms of predicted storm speed.

ANNEX A

1. GENERAL

Due to the rapid growth of personal computers in the meteorological community, and saved publishing costs, raw tropical cyclone track (best track, initial warning, 24-hour forecast, 48-hour forecast, and 72-hour forecast) and fix (satellite, aircraft, radar and synoptic) data will be available separately, upon request, to be copied on 5.25 inch "floppy" diskettes. These data sets include: one (1 January - 31 December 1986) for the western North Pacific and North Indian Oceans, and the other (1 July 1985 - 30 June 1986) for the South Pacific and South Indian Oceans. The first data set requires four and the second requires two 5.25 inch "floppy" diskettes. Agencies or individuals desiring these data sets should forward the appropriate number of diskettes (four, two or six for both data sets) to NAVOCEANCOMCEN/JTWC, Guam with their request for one of two computer systems - Z-DOS (Zenith computer compatible) or MS-DOS (Zenith or IBM computer compatible). Once your request has been received the requested data will be promptly copied onto your diskettes and returned with an explanation of the recorded data formats. The use of "floppy" diskettes should facilitate the transfer of these bulky raw data files to your computer.

2. WESTERN NORTH PACIFIC VERIFICATION STATISTICS

This section includes only verification statistics for each warning in the western North Pacific. Pre- and post-warning best track positions are not printed, but are available in the raw data set that can be requested (see paragraph 1. above). (Similar verification statistics for the North and South Indian Ocean and western South Pacific are not included in this publication, but can be generated from the raw track and fix data files mentioned in the section 1. above.)

	Juay	(01W)										
DLC	W#	BT Lat	BT Lon	Pos Er	24 Er	48 Er	72 Er	BT Wn	WW Er	24 WE	48 WE	72 WE
86020100	1	4 6N	143 6E	24	110	51	276	30	0	10	10	10
86020106		5 1 N	142 1E	13	. 8	54	359	30	0	- 5	-5	- 5
86020112		5 5N	140 5E	35	251	216	523	30	ŏ	10	ō	- 5
86020118	4	5.9N	138 9E	9	114	265	682	35	- 5	- 5	0	-10
86020200	5	6.5N	137 4E	13	109	300	701	45	· 5	5	0	- 15
86020206	6	7.8N	136 2E	18	57	353	732	50	0	5	0	5
86020212		8.8N	134 8E	18	125	471	790	50	0	10	- 10	10
86020218		9.7N	133 6E	24	243	560	746	55	0	10	- 15	15
86020300		10 5N	132 4E	6	240	501	585	55	5	-10	-40	5
86020306 86020312		11.3N 12.4N	131.7E 131.3E	12 12	296 126	542 324		60	0	-15	- 15	
86020318		13.6N	131.3E	30	184	324		60 60	0 - 5	·35	- 15	
86020400		14.9N	131.5E	6	98			65	0	-40		
86020406		16.1N	132.3E	ō	80			70	. 5	-15		
86020412		17.1N	133.6E	17	94			75	5	5		
86020418		18.0N	135.2E	25	56			80	- 5	10		
86020500	17	18.6N	136.5E	28	165			85	- 10	10		
86020506	18	18.6N	137.9E	6				60	0			
86020512		18.7N	139.2E	11				45	0			
86020518		18 8N	140 5E	24				35	0			
86020600	21	18 8N	141 8E	6				30	0			
		AVERAGE		16	138	331	599					
	# 0	OF CASES		21	17	11	9					
Typhoon I	Ken	(02W)										
DTG	W#	BT Lat	BT Lon	Pos Er	24 Er	48 Er	72 Er	BT Wn	WW Er	24 WE	48 WE	72 WE
86042618		7 4N	139 7E	48	121	273	444	45	- 10	.20	. 15	25
86042700 86042706		7 7N 8 0N	139.6E	24	98 43	236 92	402 222	50 60	0	· 5 · 5	20	60
86042712	-	8 6N	139 4E 139 3E	25	51	97	210	70	- 5	. 5	35 40	65 65
86042718		9 1N	139 3E	22	24	84	194	75	. 5	10	50	70
86042800		9 6N	139 3E	6	139	264	346	80	. 5	25	55	75
86042806		9.9N	139.3E	8	118	294	608	90	- 5	35	60	55
86042812		10 1N	139 1E	18	125	299	539	85	0	40	60	60
86042818	9	10 2N	138 9E	30	156	354	565	80	10	40	45	45
86042900	10	10 3N	138.7E	6	30	126	156	70	5	5	30	35
86042906		10 3N	138.4E	0	48	133	149	60	5	5	30	40
			138 1E		37	70	43	55				0
86042912		10 3N		8	_				5	0	5	
86042918	13	10 3N	137 8E	6	57	80	59	50	5	0	15	25
86042918 86043000	13	10 3N 10 3N	137 8E 137 4E	6 13	57 72			50 45	5 5	0 5		
86042918 86043000 86043006	13 14 15	10 3N 10 3N 10 2N	137 8E 137 4E 137 1E	6 13 12	57	80	59	50 45 40	5 5 5	0	15	25
86042918 86043000 86043006 86043012	13 14 15 16	10 3N 10 3N	137 8E 137 4E	6 13	57 72	80	59	50 45	5 5	0 5	15	25
86042918 86043000 86043006	13 14 15 16 17	10 3N 10 3N 10 2N 10 1N	137 8E 137 4E 137 1E 136 7E	6 13 12 30	57 72	80	59	50 45 40 40	5 5 5 0	0 5	15	25
86042918 86043000 86043006 86043012 86043018	13 14 15 16 17	10 3N 10 3N 10 2N 10 1N 9 8N 9 6N	137 8E 137 4E 137 1E 136 7E 136 2E	6 13 12 30 48 8	57 72 59	80 88	59 88	50 45 40 40 35	5 5 0 0	0 5	15	25
86042918 86043000 86043006 86043012 86043018	13 14 15 16 17 18	10 3N 10 3N 10 2N 10 1N 9 8N	137 8E 137 4E 137 1E 136 7E 136 2E	6 13 12 30 48	57 72	80	59	50 45 40 40 35	5 5 0 0	0 5	15	25
86042918 86043000 86043006 86043012 86043018 86050100	13 14 15 16 17 18	10 3N 10 3N 10 2N 10 1N 9 8N 9 6N AVERAGE OF CASES	137 8E 137 4E 137 1E 136 7E 136 2E 135 7E	6 13 12 30 48 8	57 72 59 78	80 88 178	59 88 288	50 45 40 40 35	5 5 0 0	0 5	15	25
86042918 86043000 86043006 86043012 86043018 86050100	13 14 15 16 17 18	10 3N 10 3N 10 2N 10 1N 9 8N 9 6N AVERAGE OF CASES	137 8E 137 4E 137 1E 136 7E 136 2E 135 7E	6 13 12 30 48 8 17	57 72 59 78 15	178 14	59 88 288 14	50 45 40 40 35 30	5 5 5 0 0	0 5 0	15 20	25 30
86042918 86043000 86043006 86043012 86043018 86050100	13 14 15 16 17 18	10 3N 10 3N 10 2N 10 1N 9 8N 9 6N AVERAGE OF CASES	137 8E 137 4E 137 1E 136 7E 136 2E 135 7E	6 13 12 30 48 8	57 72 59 78 15	178 14	59 88 288 14	50 45 40 40 35 30	5 5 5 0 0	0 5 0	15 20	25 30
86042918 86043000 86043006 86043012 86043018 86050100	13 14 15 16 17 18	10 3N 10 3N 10 2N 10 1N 9 8N 9 6N AVERAGE OF CASES Lola (C BT Lat	137 8E 137 4E 137 1E 136 7E 136 2E 135 7E 23W) BT Lon 159 7E	6 13 12 30 48 8 17 18 Pos Er	57 72 59 78 15 24 Er 166	178 14 48 Er 157	59 88 288 14 72 Er 274	50 45 40 40 35 30 BT Wn	5 5 5 0 0 0	0 5 0 24 WE -20	15 20 48 WE -60	25 30 72 WE -75
86042918 86043000 86043010 86043018 86043018 86050100	13 14 15 16 17 18	10 3N 10 3N 10 2N 10 1N 9 8N 9 6N AVERAGE F CASES Loia (C BT Lat 7 8N 8 0N	137 8E 137 4E 137 1E 136 7E 136 2E 135 7E 23 W) BT Lon 159 7E 159 6E	6 13 12 30 48 8 17 18 Pos Er	57 72 59 78 15 24 Er 166 78	80 88 178 14 48 Er 157 165	59 88 288 14 72 Er 274 335	50 45 40 40 35 30 BT Wn 40 50	5 5 5 0 0 0 0	24 WE -20 -10	15 20 48 WE - 60 - 55	25 30 72 WE -75 -50
86042918 86043000 86043006 86043012 86043018 86050100 Super Typ DTG 86051760 86051706 86051712	13 14 15 16 17 18 #0	10 3N 10 3N 10 2N 10 1N 9 8N 9 6N AVERAGE F CASES Lola (C BT Lat 7 8N 8 0N 8 0N	137 8E 137 4E 137 1E 136 7E 136 2E 135 7E 03W) BT Lon 159 7E 159 6E 159 4E	6 13 12 30 48 8 17 18 Pos Er 48 12 25	57 72 59 78 15 24 Er 166 78 53	80 88 178 14 48 Er 157 165 142	59 88 288 14 72 Er 274 335 293	50 45 40 40 35 30 BT Wn 40 50 55	5 5 5 0 0 0	24 WE -20 -10	15 20 48 WE -60 -55 -60	25 30 72 WE -75 -50 -40
86042918 86043000 86043012 86043018 86050100 Super Typ DTG 86051700 86051712 86051712	13 14 15 16 17 18 #0	10 3N 10 3N 10 2N 10 2N 9 8N 9 6N AVERAGE F CASES LOIB (C BT Lat 7 8N 8 0N 8 0N 8 1N	137 8E 137 4E 137 1E 136 2E 136 7E 135 7E 33W) BT Lon 159 7E 159 6E 159 4E 159 2E	6 13 12 30 48 8 17 18 Pos Er 48 12 25 38	57 72 59 78 15 24 Er 166 78 53 34	80 88 178 14 48 Er 157 165 142 76	59 88 288 14 72 Er 274 335 293 248	50 45 40 40 35 30 BT Wn 40 50 55 60	5 5 5 0 0 0 0	24 WE -20 -10 -15	15 20 48 WE -60 -55 -60 -65	72 WE -75 -40 -30
86042918 86043000 86043012 86043018 86050100 Super Typ DTG 86051706 86051706 86051712 86051718	13 14 15 16 17 18 #C	10 3N 10 3N 10 2N 10 1N 9 8N 9 6N AVERAGE OF CASES Loia (C BT Lat 7 8N 8 0N 8 0N 8 1N 8 2N	137 8E 137 4E 137 1E 136 7E 136 2E 135 7E 23 W) BT Lon 159 7E 159 6E 159 2E 159 0E	6 13 12 30 48 8 17 18 Pos Er 48 12 25 38 12	57 72 59 78 15 24 Er 166 78 53 34 86	80 88 178 14 48 Er 157 165 142 76 259	59 88 288 14 72 Er 274 335 293 248 477	50 45 40 40 35 30 BT Wn 40 50 55 60 65	5 5 5 0 0 0 0	24 WE - 20 - 10 - 15 - 35	15 20 48 WE -60 -55 -60 -65	25 30 72 WE -75 -50 -40 -30 -20
86042918 86043000 86043012 86043018 86050100 Super Typ DTG 86051706 86051716 86051712 86051712 86051800 86051800	#CC	10 3N 10 3N 10 2N 10 1N 9 8N 9 6N AVERAGE F CASES Loia (C BT Lat 7 8N 8 0N 8 0N 8 1N 8 2N 8 6N	137 8E 137 4E 137 1E 136 7E 136 2E 135 7E 23 3W) BT Lon 159 7E 159 6E 159 4E 159 0E 159 0E	6 13 12 30 48 8 17 18 Pos Er 48 12 25 38 12 8	78 78 15 24 Er 166 78 53 34 86 90	80 88 178 14 48 Er 157 165 142 76 259 264	59 88 14 72 Er 274 335 293 248 477 461	50 45 40 40 35 30 BT Wn 40 50 55 60 65 75	\$5 55 0 0 0 0 0 0 0 0	24 WE -20 -10 -15 -35 -40	15 20 48 WE -60 -55 -60 -65 -50 -35	72 WE -75 -50 -40 -20 -5
86042918 86043000 86043012 86043018 86050100 Super Typ DTG 86051700 86051712 86051712 86051712 86051800 86051800 86051812	#C #	10 3N 10 3N 10 2N 10 1N 9 8N 9 6N AVERAGE F CASES I Loia (C BT Lat 7 8N 8 0N 8 0N 8 1N 8 2N 8 6N 9 3N	137 8E 137 4E 137 1E 136 7E 136 2E 135 7E 23 W) BT Lon 159 7E 159 6E 159 4E 159 2E 159 0E 159 0E 158 9E	6 13 12 30 48 8 17 18 Pos Er 48 12 25 38 12 25 38 8	78 72 59 78 15 24 Er 166 78 53 34 86 90 68	80 88 178 14 48 Er 157 165 142 76 259 264 275	59 88 14 72 Er 274 335 293 248 477 461 486	50 45 40 40 35 30 BT Wn 40 50 55 60 65 65 80	\$5 5 5 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	24 WE -20 -10 -15 -35 -40 -40	15 20 48 WE - 60 - 55 - 60 - 65 - 50 - 35 - 25	72 WE - 75 - 50 - 40 - 30 - 20 - 5 - 5
86042918 86043000 86043012 86043018 86050100 Super Typ DTG 86051706 86051718 86051718 86051806 86051812 86051818	#Conhoon W#	10 3N 10 3N 10 2N 10 1N 9 8N 9 6N AVERAGE F CASES LOIB (C BT Lat 7 8N 8 0N 8 1N 8 2N 8 2N 9 3N 9 8N	137 8E 137 4E 137 1E 136 7E 136 2E 135 7E 135 7E 03W) BT Lon 159 7E 159 6E 159 0E 159 0E 159 0E 159 9E 159 0E	6 13 12 30 48 8 17 18 Pos Er 48 12 25 38 12 8 8	78 72 59 78 15 24 Er 166 78 53 34 86 90 68 98	80 88 178 14 48 Er 157 165 142 76 259 264 275 285	59 88 288 14 72 Er 274 335 293 248 477 461 541	50 45 40 40 30 30 8T Wn 40 50 55 60 65 75 80 90	55 55 00 00 00 00 00 00 00 00 00	24 WE -20 -10 -15 -35 -40 -35	15 20 48 WE - 60 - 55 - 60 - 65 - 50 - 35 - 25 - 5	72 WE - 75 - 50 - 40 - 30 - 20 - 5 - 5 - 30
86042918 86043000 86043012 86043018 86050100 Super Typ DTG 86051706 86051712 86051718 86051800 86051812 86051818 86051818	13 14 15 16 17 18 *C	10 3N 10 3N 10 2N 10 1N 9 8N 9 6N AVERAGE F CASES I Loia (C BT Lat 7 8N 8 0N 8 0N 8 1N 8 2N 8 6N 9 3N	137 8E 137 4E 137 1E 136 7E 136 2E 135 7E 23 W) BT Lon 159 7E 159 6E 159 4E 159 2E 159 0E 159 0E 158 9E	6 13 12 30 48 8 17 18 Pos Er 48 12 25 38 12 25 38 8	78 72 59 78 15 24 Er 166 78 53 34 86 90 68	80 88 178 14 48 Er 157 165 142 76 259 264 275	59 88 14 72 Er 274 335 293 248 477 461 486	50 45 40 40 35 30 BT Wn 40 50 55 60 65 65 80	\$5 5 5 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	24 WE -20 -10 -15 -35 -40 -40	15 20 48 WE - 60 - 55 - 60 - 65 - 50 - 35 - 25	72 WE - 75 - 50 - 40 - 30 - 20 - 5 - 5
86042918 86043000 86043012 86043018 86050100 Super Typ DTG 86051706 86051718 86051718 86051806 86051812 86051818	13 14 15 16 17 18 #C	10 3N 10 3N 10 2N 10 2N 9 8N 9 6N AVERAGE F CASES Lola (C BT Lat 7 8N 8 0N 8 1N 8 2N 8 6N 9 3N 10 3N	137 8E 137 4E 137 1E 136 2E 136 7E 135 7E 33W) BT Lon 159 7E 159 4E 159 0E 159 0E 159 0E 158 9E 158 5E 158 0E	6 13 12 30 48 8 17 18 Pos Er 48 12 25 38 12 8 8 13 5	57 72 59 78 15 24 Er 166 78 53 34 86 90 68 98 140	80 88 178 14 48 Er 157 165 142 76 259 264 275 303	59 88 14 72 Er 274 335 293 248 477 461 486 541 642	50 45 40 40 35 30 BT Wn 40 50 65 75 80 90 115	55 55 00 00 00 00 00 00 00 00 00	24 WE -20 -10 -15 -35 -40 -40 -35 -5	15 20 20 48 WE 60 55 50 65 50 35 25	72 WE -75 -50 -40 -30 -20 -5 -530 -65
86042918 86043000 86043012 86043018 86050100 Super Typ DTG 86051706 86051712 86051718 86051800 86051800 86051800 86051800 86051900	13 14 15 16 17 18 #CC #CC 3 3 4 4 5 5 6 6 7 8 9 10 11	10 3N 10 3N 10 2N 10 1N 9 8N 9 6N 2 CASES Loia (C BT Lat 7 8N 8 0N 8 1N 8 6N 9 3N 9 3N 10 3N 11 0N	137 8E 137 4E 137 1E 136 7E 136 7E 136 7E 136 7E 136 7E 139 7E 159 6E 159 0E 159 0E 159 0E 159 0E 158 0E 158 0E 158 0E	6 13 12 30 48 8 8 17 18 Pos Er 48 12 25 38 12 8 8 13 5 0	57 72 59 78 15 24 Er 166 78 53 34 86 90 68 98 140	80 88 178 14 48 Er 157 165 142 76 259 264 275 285 303 340	59 88 14 72 Er 274 335 293 248 477 461 486 541 642 785	50 45 40 40 35 30 BT Wn 40 50 55 75 80 90 115 130	55 55 00 00 00 00 00 00 00 00 00 00 00	24 WE -20 -10 -15 -35 -40 -40 -355 -5 -15	15 20 20 48 WE 60 55 65 65 50 35 25 25 25 35	72 WE -75 -50 -40 -30 -20 -5 -5 -50 -65
86042918 86043000 86043012 86043018 86050100 Super Typ DTG 86051706 86051718 86051718 86051800 86051812 86051818 86051818 8605190 86051918 86051918 86051918	#C #	10 3N 10 3N 10 2N 10 1N 9 8N 9 6N AVERAGE F CASES I Lola (C BT Lat 7 8N 8 0N 8 1N 8 2N 8 2N 9 3N 10 3N 11 0N 11 6N 12 3N 13 4N	137 8E 137 4E 137 1E 136 7E 136 7E 136 7E 138 7E 138 7E 159 6E 159 4E 159 0E 159 5E 159 0E	6 13 12 300 48 8 8 17 18 Pos Er 48 12 25 38 8 12 8 8 13 5 0 8 6 6 8	78 72 59 78 15 24 Er 166 78 53 34 86 90 68 98 140 118 68 100 104	80 88 178 14 48 Er 157 165 142 76 259 264 275 285 303 340 285 383 406	59 88 14 72 Er 274 335 293 248 477 461 642 785 828 1028 947	50 45 40 40 40 33 30 BT Wn 40 50 55 60 65 75 80 90 115 130 140	55 55 00 00 00 00 00 00 00 00 00 00 00 0	24 WE 20 10 15 35 40 35 5 15 20 35 0	15 20 48 WE 60 55 50 65 25 25 25 35 40 55	72 WE -75 -50 -40 -30 -20 -5 -5 -65 -65 -65 -70 -15
86042918 86043010 86043012 86043018 86050100 Super Typ DTG 86051706 86051712 86051718 86051810 86051810 86051812 86051818 86051812 86051912 86051912 86051916 86051916 86055918	13 14 15 16 17 18 #C	10 3N 10 3N 10 2N 9 8N 9 6N AVERAGE F CASES L Lola (C BT Lat 7 8N 8 0N 8 1N 8 2N 8 6N 9 3N 10 3N 11 0N 11 6N 12 3N 13 4N	137 8E 137 4E 137 1E 136 7E 136 7E 136 7E 136 7E 137 7E 159 7E 159 4E 159 0E 159 0E 159 0E 159 0E 158 0E 157 1E 156 3E 157 1E 156 3E 157 1E	6 13 12 30 48 8 8 17 18 Pos Er 48 12 25 38 12 8 8 13 5 0 8 6 8 8	57 72 59 78 15 24 Er 166 78 53 34 86 90 68 140 118 68 100 104 68	80 88 178 14 48 Er 157 165 142 76 259 264 275 303 340 285 383 406 204	59 88 14 72 Er 274 335 293 248 477 461 486 541 642 785 828 1028	50 45 40 40 335 30 BT Wn 40 50 65 75 80 90 115 130 140 150	55 55 00 00 00 00 00 00 00 00 00 00 00 0	24 WE -20 -10 -15 -35 -40 -40 -35 -5 -15 -20 -35 -0 -5	15 20 48 WE 60 65 50 35 25 35 40 55 55	72 WE -75 -50 -40 -30 -5 -5 -5 -65 -65 -70
86042918 86043010 86043012 86043018 86050100 Super Typ DTG 86051706 86051712 86051718 86051810 86051810 86051812 86051812 86051900 86051900 86051900 86051900 86052006	#C #	10 3N 10 3N 10 2N 10 1N 9 8N 9 6N AVERAGE OF CASES 1 Lola (C 8 BT Lat 7 8N 8 0N 8 1N 8 2N 8 6N 9 3N 10 3N 11 0N 11 6N 12 3 4N 14 4N 15 2N	137 8E 137 4E 137 1E 136 7E 136 7E 136 7E 135 7E 33W) BT Lon 159 6E 159 0E 159 0E 159 0E 159 0E 159 0E 158 0E 157 1E 156 3E 157 1E 156 3E 157 4E 153 2E 153 2E 153 3E	6 13 12 30 48 8 8 17 18 Pos Er 48 12 25 38 12 8 8 13 5 0 8 8 6 6 8 8 6 6	78 72 59 78 15 24 Er 166 78 53 34 86 90 68 98 140 118 68 100 104 68 120	80 88 178 14 48 Er 157 165 142 275 264 275 285 303 340 285 383 406 204 414	59 88 14 72 Er 274 335 293 248 477 461 642 785 828 1028 947	50 45 40 40 35 30 87 40 50 65 75 80 91 15 130 140 150 140 150	55 55 00 00 00 00 00 00 00 00 00 00 00 0	24 WE -20 -10 -15 -35 -40 -40 -35 -5 -5 -5	15 20 48 WE -60 -55 -60 -35 -50 -35 -25 -35 -40 -55 -50 -55 -50 -55 -50 -55 -50 -55 -55	72 WE -75 -50 -40 -30 -20 -5 -5 -65 -65 -65 -70 -15
86042918 86043000 86043012 86043018 86050100 86051700 86051706 86051712 86051718 86051800 86051800 86051800 86051900 86051900 86051900 86051900 86052008	#C #	10 3N 10 3N 10 2N 10 1N 9 8N 9 6N 9 6N AVERAGE OF CASES T BT Lat 7 8N 8 0N 8 0N 8 0N 8 2N 8 6N 9 3N 9 3N 10 3N 11 0N 11 6N 12 3N 14 4N 15 2N 16 3N	137 8E 137 4E 137 1E 136 7E 136 2E 135 7E 23 3W) BT Lon 159 7E 159 6E 159 0E 159 0E 159 0E 159 0E 159 0E 159 0E 159 0E 159 0E 159 5E 159 5E 159 5E 159 5E	6 13 12 30 48 8 8 17 18 Pos Er 48 12 25 38 13 5 0 8 6 8 8 6 6 8	78 72 59 78 15 24 Er 166 78 53 34 86 90 68 98 140 118 68 100 104 68 120 138	80 88 178 14 48 Er 157 162 76 259 264 275 285 303 340 285 383 406 204 414 510	59 88 14 72 Er 274 335 293 248 477 461 642 785 828 1028 947	50 45 40 40 35 30 BT Wn 40 50 55 60 65 75 80 90 115 130 140 150 140 130 140	55 55 00 00 00 00 00 00 00 00 00 00 00 0	24 WE -20 -10 -15 -35 -40 -45 -5 -5 -5 -5 -5 -5 -5 -5 -5 -5 -5 -5 -5	15 20 48 WE 60 55 65 65 50 35 25 25 35 40 55 15 30	72 WE -75 -50 -40 -30 -20 -5 -5 -65 -65 -65 -70 -15
86042918 86043000 86043012 86043018 86050100 Super Typ DTG 86051706 86051712 86051712 86051712 86051812 86051818 86051806 86051812 86051812 86051906 86051912 86051912 86051906 86052018 86052018	13 14 15 16 17 18 #C	10 3N 10 3N 10 2N 10 1N 9 8N 9 6N 8 6N 8 0N 8 0N 8 1N 8 6N 9 3N 9 8N 10 3N 9 8N 11 0N 11 6N 12 3N 13 4N 15 2N 16 3N 17 5N	137 8E 137 4E 137 1E 136 7E 136 2E 135 7E 136 2E 139 6E 159 6E 159 0E 159 0E 159 0E 159 0E 159 0E 159 0E 159 0E 159 159 0E	6 13 12 30 48 8 8 17 18 Pos Er 48 12 25 38 8 13 5 0 8 6 8 8 6 6 8 6	78 72 59 78 15 24 Er 166 78 53 34 86 90 68 98 140 118 100 104 68 120 138 159	80 88 178 14 48 Er 157 165 142 76 259 264 275 285 303 340 285 383 406 204 414 410 628	59 88 14 72 Er 274 335 293 248 477 461 642 785 828 1028 947	50 45 40 40 35 30 8T Wn 40 50 55 60 65 75 80 90 115 130 140 135 130 140 150	\$5 55 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	24 WE -20 -10 -15 -35 -40 -40 -35 -5 -5 -10 -25	15 20 48 WE 60 55 60 65 50 35 525 35 40 55 15 51 30 35	72 WE -75 -50 -40 -30 -20 -5 -5 -65 -65 -65 -70 -15
86042918 86043010 86043012 86043018 86050100 Super Typ DTG 86051706 86051718 86051718 86051800 86051806 86051812 86051818 86051818 86051818 86051900 86051918 86051918 86051918 86052010 86052010 86052010 86052010 86052010	#CC	10 3N 10 2N 10 3N 10 2N 9 6N 9 6N 4VERAGE F CASES 1 Lola (C BT Lat 7 8 N 8 2N 8 6N 8 1N 8 2N 9 8N 10 3N 11 0N 12 3N 11 0N 12 3N 14 4N 15 2N 16 3N 17 5N 18 9N 18 9N	137 8E 137 4E 137 1E 136 2E 136 2E 136 7E 135 7E 33W) BT Lon 159 6E 159 0E 159 3E 159 3E 159 3E 159 3E 159 3E 159 3E 159 5E	6 13 12 30 48 8 8 17 18 Pos Er 48 12 25 38 13 5 0 8 6 8 8 6 6 8	78 72 59 78 15 24 Er 166 78 53 34 86 90 68 98 140 118 68 100 104 68 120 138	80 88 178 14 48 Er 157 162 76 259 264 275 285 303 340 285 383 406 204 414 510	59 88 14 72 Er 274 335 293 248 477 461 642 785 828 1028 947	50 45 40 40 35 30 BT Wn 40 50 55 60 65 75 80 90 115 130 140 150 140 130 140	55 55 00 00 00 00 00 00 00 00 00 00 00 0	24 WE -20 -10 -15 -35 -40 -45 -5 -5 -5 -5 -5 -5 -5 -5 -5 -5 -5 -5 -5	15 20 48 WE 60 55 65 65 50 35 25 25 35 40 55 15 30	72 WE -75 -50 -40 -30 -20 -5 -5 -65 -65 -65 -70 -15
86042918 86043000 86043012 86043018 86050100 Super Typ DTG 86051706 86051712 86051712 86051712 86051812 86051818 86051806 86051812 86051812 86051906 86051912 86051912 86051906 86052018 86052018	13 14 15 16 17 18 *C *C *C *C *C *C *C *C *C *C *C *C *C	10 3N 10 3N 10 2N 10 1N 9 8N 9 6N 8 6N 8 0N 8 0N 8 1N 8 6N 9 3N 9 8N 10 3N 9 8N 11 0N 11 6N 12 3N 13 4N 15 2N 16 3N 17 5N	137 8E 137 4E 137 1E 136 7E 136 2E 135 7E 136 2E 139 6E 159 6E 159 0E 159 0E 159 0E 159 0E 159 0E 159 0E 159 0E 159 159 0E	6 13 12 300 48 8 8 17 18 Pos Er 48 12 25 38 8 12 8 8 8 6 6 8 8 6 6 6 6	78 72 59 78 15 24 Er 166 78 53 34 86 90 118 68 100 104 68 120 138 159 178	80 88 178 14 48 Er 157 165 142 76 259 264 275 285 303 340 285 383 406 204 414 410 628	59 88 14 72 Er 274 335 293 248 477 461 642 785 828 1028 947	50 45 40 40 33 30 8T Wn 40 50 55 60 65 75 130 140 150 140 135 130 120 120	55 50 00 00 00 00 00 00 00 00 00 00 00 0	24 WE 20 10 15 35 40 35 5 15 20 35 6 10 25 20	15 20 48 WE 60 55 60 65 50 35 525 35 40 55 15 51 30 35	72 WE -75 -50 -40 -30 -20 -5 -5 -65 -65 -65 -70 -15
86042918 86043010 86043012 86043018 86050100 Super Typ DTG 86051706 86051712 86051718 86051800 86051810 86051812 86051812 86051812 86051900 86051912 86051912 86052012 86052012 86052018 86052018 86052018	13 14 15 16 17 17 18 #C **C **C **C **C **C **C **C **C **C	10 3N 10 3N 10 3N 10 3N 10 2N 9 8N 9 6N 4VERAGE F CASES 1 Lola (C BT Lat 7 8N 8 6N 8 1N 8 6N 9 3N 10 3N 11 6N 12 3N 12 3N 13 4N 15 2N 16 3N 17 5N 18 9N 20 4N	137 8E 137 4E 137 1E 136 7E 136 7E 136 7E 136 7E 137 7E 159 7E 159 8E 159 0E 159 0E 159 0E 159 0E 159 0E 159 0E 159 0E 159 1E 159 0E 159 1E 159 2E 159 0E 159 1E 159 2E 159 0E 159 0E 159 0E 159 5E 159 3E 159 3E 159 3E	6 13 12 30 48 8 8 17 18 Pos Er 48 12 5 38 12 8 8 8 6 6 8 8 6 6 6 6 6 6	78 72 59 78 15 24 Er 166 78 53 34 86 90 68 140 118 68 100 104 68 120 138 159 178	80 88 178 14 48 Er 157 165 142 76 259 264 275 285 303 340 285 383 406 204 414 410 628	59 88 14 72 Er 274 335 293 248 477 461 642 785 828 1028 947	50 45 40 40 35 30 BT Wn 40 50 55 75 80 90 115 130 140 150 140 135 125 120 115 110 95 80	55500000000000000000000000000000000000	24 WE 20 10 15 35 40 40 35 5 15 20 35 0 5 5 10 25 20 15 5 5	15 20 48 WE 60 55 60 65 50 35 525 35 40 55 15 51 30 35	72 WE -75 -50 -40 -30 -20 -5 -5 -65 -65 -65 -70 -15
86042918 86043000 86043018 86043018 86050100 86050100 86051706 86051718 86051718 86051718 86051818 86051806 86051818 86051806 86051910 86051912 86051918 86052018 86052018 86052018 86052018 86052018 86052018 86052018	13 14 4 15 16 17 18 W#	10 3N 10 2N 10 3N 10 2N 9 6N 9 6N 4VERAGE SF CASES 1 Lola (C BT Lat 7 8N 8 0N 8 1N 8 2N 10 3N 11 0N 11 6N 12 3N 14 4N 15 2N 16 5N 18 9N 20 4N 22 1N 23 8N 25 8N 10 3N 10 3N 10 10 5N	137 8E 137 4E 137 1E 136 7E 136 2E 136 7E 136 2E 135 7E 159 6E 159 4E 159 0E 159 5E 159 0E 159 5E 159 0E 159 5E 150 5E 150 5E 150 5E 150 5E	6 13 12 300 48 8 8 17 18 Pos Er 48 12 25 38 8 13 5 0 8 8 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6	78 72 59 78 15 24 Er 166 78 334 86 90 68 90 118 68 100 118 68 120 138 159 176 244	80 88 178 14 48 Er 157 165 142 76 259 264 275 285 303 340 285 383 406 204 414 410 628	59 88 14 72 Er 274 335 293 248 477 461 642 785 828 1028 947	50 45 40 40 35 30 35 30 87 87 80 90 115 130 140 135 120 115 110 95 110 95 80 80	55 50 00 00 00 00 00 00 00 00 00 00 00 0	24 WE -20 -10 -15 -35 -40 -40 -35 -5 -15 -20 -35 -5 -10 -25 -20 -15 -25	15 20 48 WE 60 55 60 65 50 35 525 35 40 55 15 51 30 35	72 WE -75 -50 -40 -30 -20 -5 -5 -65 -65 -65 -70 -15
86042918 86043010 86043012 86043018 86050100 86051700 86051706 86051718 86051718 86051800 86051812 86051812 86051800 86051900 86051900 86051900 86051900 8605200 86052012 86052018 86052018 86052018	#CC	10 3N 10 3N 10 2N 10 1N 9 8N 9 6N 9 6N AVERAGE EXCASES 1 Loia (C BT Lat 7 8N 8 0N 8 0N 8 6N 9 3N 9 8N 11 0N 12 3N 13 4N 14 4N 15 2N 16 3N 17 5N 18 9N 18 5N 18 5N	137 8E 137 4E 137 1E 136 7E 136 2E 135 7E 136 2E 135 7E 159 6E 159 0E 159 0E	6 13 12 30 48 8 8 17 18 Pos Er 48 12 25 38 13 5 0 8 6 6 8 8 6 6 6 6 6 6 6 6 6 6 6 6 6 6	78 72 59 78 15 24 Er 166 78 53 486 90 68 98 140 118 68 100 104 68 120 138 159 178 244 239	80 88 178 14 48 Er 157 165 142 76 259 264 275 285 303 340 285 383 406 204 414 410 628	59 88 14 72 Er 274 335 293 248 477 461 642 785 828 1028 947	50 45 40 40 35 30 BT Wn 40 50 55 75 80 90 115 130 140 150 140 135 125 120 115 110 95 80	55500000000000000000000000000000000000	24 WE 20 10 15 35 40 40 35 5 15 20 35 0 5 5 10 25 20 15 5 5	15 20 48 WE 60 55 60 65 50 35 525 35 40 55 15 51 30 35	72 WE -75 -50 -40 -30 -20 -5 -5 -65 -65 -65 -70 -15

1932 3355554, GSSSSS

PARAMENT SOCIOCATION PROPERTY OF SOCIOCATION SOCIOCATI

86052306	25 26	32 8N 35 3N	159 9E 164 4E	8 10				55 50	0			
		VERAGE F CASES		11 26	130 22	326 18	581 14					
Transact Co		Man //	0.414/\									
Tropical Si	W#	BT Lat	BTion	Pos Er	24 Er	48 Er	72 Er	BT Wn	ww Er	24 WE	48 WE 72	WE
									_	_		
86052600 86052606	1 2	20 8N 21 3N	121 2E 121 7E	19 42	110	104 142	33 65	35 45	0	· 5 15	15 30	10 25
86052612	3	22 ON	122 0E	6	123	265	169	-	5	15	25	20
86052618	4	22 6N	122 1E	29	168	255		45	0	15	15	_
86052700	5	23 2N	122 6E	13	118	139		45	0	20	15	
86052706	6	23 3N	122 8E	12	29	203		40	0	15	20	
86052712 86052718	7 8	23 5N 23 5N	123 0E 123 3E	11 12	70 86	209		40 35	- 5 0	10 10	25	
86052800	9	23 5N	123 6E	16	166			30	5	10		
86052806	10	23.4N	124 1E	6	196			30	5	- 5		
86052812	11	23 4N	125.1E	13	180			30	0	· 5		
86052818	12	23 7N	126 3E	13				30	0			
86052900 86052906	13 14	24 0N 24 4N	127 7E 129 3E	0				30 30	0			
86052912		24.9N	130 9E	6				25	ŏ			
	-	_ •										
		VERAGE		13	123	188	89					
	# O	FCASES		15	11	7	3					
Typhoon N	lancv	(05W)										
• •	W#	BT Lat	BT Lon	Pos Er	24 Er	48 Er	72 Er	BT Wn	WW Er	24 WE	48 WE 72	WE
									_			_
86062118	1	14.2N 15.5N	129 1E 127 8E	13 18	74 59	198 128	707 508	30 50	0	· 15	- 20 - 10	- 5
86062200 86062206	2	15.5N 16.6N	127 BE	0	31	104	347	55	0	5	15	5 20
86062212	4	17.8N	125 3E	21	60	101	•	65	ō	· 1 0	10	
86062218	5	18 9N	124 1E	12	42	244		70	0	- 5	5	
86062300	6	20 ON	123 0E	6	24	300		75	0	5	15	
86062306 86062312	7 8	21 3N 22 5N	122 2E 121 8E	0 6	88 152	310		75 80	· 5 0	0 20	15	
86062318	9	22 5N 23 7N	121.8C	6	341			70	0	10		
86062400	10	25 6N	121 7E	17	131			65	ō	0		
86062406	11	28 1N	121 9E	20	145			55	0	5		
86062412	12	29 8N	123 7E	28				50	0			
86062418	13	32 1N	127 5E	2 8 107				50	0			
	_			28					-			
86062418 86062500	13 14	32 1N 34 5N	127 5E 129 6E	28 107 51				50 45	0			
86062418 86062500	13 14 15	32 1N 34 5N 36 3N	127 5E 129 6E	28 107 51 34	104	198	521	50 45	0			
86062418 86062500	13 14 15	32 1N 34 5N 36 3N	127 5E 129 6E	28 107 51 34	104	19 8 7	521 3	50 45	0			
86062418 86062500	13 14 15	32 1N 34 5N 36 3N WETAGE CASES	127 5E 129 6E 132 5E	28 107 51 34 23 15	11	7	3	50 45 30	0 0 10			
86062418 86062500 86062506 Tropical Si	13 14 15	32 1N 34 5N 36 3N WETAGE CASES	127 5E 129 6E 132 5E	28 107 51 34 23 15	11	7	3	50 45 30	0 0 10	24 WE	48 W E 72	WE
86062418 86062500 86062506 Tropical St	13 14 15 # Ol	32 1N 34 5N 36 3N NEPAGE FCASES Owen BT Lat	127 5E 129 6E 132 5E (06W) BT Lon	28 107 51 34 23 15	11 24 Er	7 48 Er	3 72 Er	50 45 30 BT Wn	0 0 10			
86062418 86062500 86062506 Tropical St DTG 86062800	13 14 15 # Ol lorm W#	32 1N 34 5N 36 3N NEPAGE FCASES Owen BT Lat	127 5E 129 6E 132 5E (06W) BT Lon	28 107 51 34 23 15 Pos Er	11 24 Er 106	7 48 Er 165	3 72 Er 203	50 45 30 BT Wn 30	0 0 10	10	10	30
86062418 86062500 86062506 Tropical St	13 14 15 # Ol	32 1N 34 5N 36 3N NEPAGE FCASES Owen BT Lat	127 5E 129 6E 132 5E (06W) BT Lon	28 107 51 34 23 15	11 24 Er	7 48 Er	3 72 Er	50 45 30 BT Wn	0 0 10			
86062418 86062500 86062506 Tropical St DTG 86062800 86062806 86062812 86062818	13 14 15 # Ol Rorm W#	32 1N 34 5N 36 3N WEPAGE F CASES Owen BT Lat 15 3N 15 6N 16 0N	127 5E 129 6E 132 5E (06W) BT Lon 135 3E 134 3E 133 2E 132 4E	28 107 51 34 23 15 Pos Er 24 35 24 59	11 24 Er 106 49 68 129	7 48 Er 165 69 111 147	3 72 Er 203 17 74 86	50 45 30 BT Wn 30 35 35	0 0 10 10 WW Er	10 10 10	10 20 30 35	30 35 55 55
86062418 86062500 86062506 Tropical St DTG 86062800 86062806 86062818 86062818 86062900	13 14 15 # Ol lorm W# 1 2 3 4 5	32 1N 34 5N 36 3N NVERAGE F CASES Owen BT Lat 15 3N 15 3N 16 0N 16 3N	127 5E 129 6E 132 5E 132 5E (06W) BT Lon 135 3E 134 3E 133 2E 132 4E 131 5E	28 107 51 34 23 15 Pos Er 24 35 24 59 13	11 24 Er 106 49 68 129 52	7 48 Er 165 69 111 147 54	3 72 Er 203 17 74 86 157	50 45 30 BT Wn 30 35 35 35	0 0 10 10	10 10 10 10	10 20 30 35 15	30 35 55 55 35
86062418 86062500 86062506 Tropical St DTG 86062800 86062806 86062818 86062900 86062900	13 14 15 #OI lorm W# 1 2 3 4 5 6	32 1N 34 5N 36 3N NVEPAGE F CASES Owen BT Lat 15 3N 15 6N 16 0N 16 3N 16 5N	127 5E 129 6E 132 5E 132 5E (06W) BT Lon 135 3E 134 3E 132 4E 132 5E 132 6E	28 107 51 34 23 15 Pos Er 24 35 24 59 13 6	11 24 Er 106 49 68 129 52 42	7 48 Er 165 69 111 147 54 109	3 72 Er 203 17 74 86	50 45 30 BT Wn 30 35 35 35 35	0 0 10 10 WW Er 0 0 0 5 0	10 10 10 10 5 5	10 20 30 35 15 25	30 35 55 55
86062418 86062500 86062506 Tropical St DTG 86062800 86062806 86062818 86062818 86062900	13 14 15 # Ol lorm W# 1 2 3 4 5	32 1N 34 5N 36 3N NVERAGE F CASES Owen BT Lat 15 3N 15 3N 16 0N 16 3N	127 5E 129 6E 132 5E 132 5E (06W) BT Lon 135 3E 134 3E 133 2E 132 4E 131 5E	28 107 51 34 23 15 Pos Er 24 35 24 59 13	11 24 Er 106 49 68 129 52	7 48 Er 165 69 111 147 54	3 72 Er 203 17 74 86 157	50 45 30 BT Wn 30 35 35 35	0 0 10 10	10 10 10 10	10 20 30 35 15	30 35 55 55 35
86062418 86062500 86062506 Tropical St DTG 86062806 86062812 86062818 86062900 86062912 86062918 86062918	13 14 15 # OI lorm W# 1 2 3 4 5 6 7	32 1N 34 5N 36 3N WEFAGE F CASES Owen BT Lat 15 3N 15 6N 16 0N 16 5N 16 7N	127 5E 129 6E 132 5E 132 5E (06W) BT Lon 135 3E 134 3E 133 2E 132 4E 131 5E 130 6E 129 6E 129 2E 128 6E	28 107 51 34 23 15 Pos Er 24 35 24 59 13 6 6	11 24 Er 106 49 68 129 52 42 38 38 85	7 48 Er 165 69 111 147 54 109 132 172 242	3 72 Er 203 17 74 86 157	50 45 30 BT Wn 30 35 35 35 40 45 50 50	0 0 10 10 WW Er 0 0 0 0 5 0 0 0 0	10 10 10 10 5 5 15 20	10 20 30 35 15 25 30 30	30 35 55 55 35
86062418 86062506 86062506 Tropical St DTG 86062800 86062812 86062818 86062900 86062900 86062918 86062918 86062918	13 14 15 #Ol torm w# 1 2 3 4 5 6 7 8 9	32 1N 34 5N 36 3N WERAGE F CASES Owen BT Lat 15 3N 15 6N 16 0N 16 7N 17 0N 17 5N 18 1N	127 5E 129 6E 132 5E 132 5E (06 W) BT Lon 135 3E 134 3E 133 2E 132 4E 131 5E 130 6E 129 9E 129 2E 129 6E 128 6E 128 0E	28 107 51 34 23 15 Pos Er 24 35 24 59 13 6 6 6 6 7 6	11 24 Er 106 49 68 129 52 42 38 38 85 70	7 48 Er 165 69 111 147 54 109 132 172	3 72 Er 203 17 74 86 157	50 45 30 BT Wn 30 35 35 35 40 45 50 50 45	0 0 10 10 WW Er 0 0 0 5 0 0 5 0	10 10 10 10 10 -5 5 15 20 10	10 20 30 35 15 25 30	30 35 55 55 35
86062418 86062500 86062506 Tropical St DTG 86062800 86062818 86062818 86062900 86062906 86062912 86062918 86062906 86063006	13 14 15 # Olerm # 3 4 5 6 7 8 9	32 1N 34 5N 36 3N WEPAGE FCASES Owen BT Lat 15 3N 15 6N 16 5N 16 5N 16 7N 17 5N 17 5N 18 1N 18 7N	127 5E 129 6E 132 5E 132 5E (06W) BT Lon 135 3E 134 3E 132 4E 132 5E 130 6E 129 9E 129 2E 128 6E 128 0E 128 6E	28 107 51 34 23 15 Pos Er 24 35 24 59 13 6 6 6 6 27 7 6	11 24 Er 106 49 68 129 52 42 38 38 85 70 66	7 48 Er 165 69 111 147 54 109 132 172 242	3 72 Er 203 17 74 86 157	50 45 30 BT Wn 30 35 35 35 35 40 45 50 50 45 45	0 0 10 10 0 0 0 5 0 0 5 0 0 10	10 10 10 10 -5 5 15 20 10 0	10 20 30 35 15 25 30 30	30 35 55 55 35
86062418 86062500 86062506 Tropical St DTG 86062800 86062806 86062812 86062908 86062908 86062912 86062918 86063006 86063012 86063012	13 14 15 #Ol torm w# 1 2 3 4 5 6 7 8 9	32 1N 34 5N 36 3N WERAGE F CASES Owen BT Lat 15 3N 15 6N 16 0N 16 7N 17 0N 17 5N 18 1N	127 5E 129 6E 132 5E 132 5E (06W) BT Lon 135 3E 134 3E 133 2E 132 4E 133 6E 129 9E 129 2E 128 6E 128 6E 127 2E	28 107 51 34 23 15 Pos Er 24 35 24 59 13 6 6 6 6 7 6	11 24 Er 106 49 68 129 52 42 38 38 85 70	7 48 Er 165 69 111 147 54 109 132 172 242	3 72 Er 203 17 74 86 157	50 45 30 BT Wn 30 35 35 35 40 45 50 50 45	0 0 10 10 WW Er 0 0 0 5 0 0 5 0	10 10 10 10 10 -5 5 15 20 10	10 20 30 35 15 25 30 30	30 35 55 55 35
86062418 86062500 86062506 Tropical St DTG 86062800 86062818 86062818 86062900 86062906 86062912 86062918 86062906 86063006	13 14 15 #Olorm w# 1 2 3 4 5 6 7 8 9 10 11 12	32 1N 34 5N 36 3N WEFAGE CASES Owen BT Lat 15 3N 15 3N 15 6N 16 5N 16 7N 17 0N 17 0N 17 0N 18 1N 18 1N 19 3N	127 5E 129 6E 132 5E 132 5E (06W) BT Lon 135 3E 134 3E 132 4E 132 5E 130 6E 129 9E 129 2E 128 6E 128 0E 128 6E	28 107 51 34 23 15 Pos Er 24 35 24 59 13 6 6 6 6 7 6 0 30	11 24 Er 106 49 68 129 52 42 38 38 85 70 66	7 48 Er 165 69 111 147 54 109 132 172 242	3 72 Er 203 17 74 86 157	50 45 30 BT Wn 30 35 35 35 35 35 35 35 40 45 50 45 45 40	0 0 10 10 0 0 0 0 5 0 0 5 0 0 10	10 10 10 10 5 5 15 20 10 0	10 20 30 35 15 25 30 30	30 35 55 55 35
86062418 86062506 86062506 DTG 86062800 86062806 86062812 86062912 86062912 86062918 86062918 86063006 86063012 86063012 86063016 86063016 86063016 86063016	13 14 15 #OI #OI 12 3 4 5 6 7 8 9 10 11 12 13 14 15	32 1N 34 5N 36 3N WEPAGE F CASES Owen BT Lat 15 3N 15 3N 16 0N 16 5N 16 7N 17 5N 18 1N 18 7N 19 3N 18 7N 19 3N 20 2N 21 8N 23 1N	127 5E 129 6E 132 5E 132 5E (06W) BT Lon 135 3E 134 3E 133 2E 132 4E 131 5E 132 9E 129 2E 128 6E 128 0E 127 6E 127 6E 127 6E 127 2E 127 3E	28 107 51 34 23 15 Pos Er 24 35 24 59 13 6 6 6 6 6 6 0 30 8 8 8	11 24 Er 106 49 68 129 52 42 38 38 85 70 66 38 142	7 48 Er 165 69 111 147 54 109 132 172 242	3 72 Er 203 17 74 86 157	50 45 30 8T Wn 30 35 35 35 35 40 45 50 50 45 40 40 40 35	0 0 10 10 10 10 10 10 10 10 10 10 10 10	10 10 10 10 5 5 15 20 10 0	10 20 30 35 15 25 30 30	30 35 55 55 35
86062418 86062506 86062506 B6062800 86062800 86062818 86062900 86062912 86062912 86062912 86062912 86063016 86063016 86063012 86063018 86070108	13 14 15 #OI #OI 12 3 4 5 6 7 8 9 10 11 12 13 14 15 15	32 1N 34 5N 36 3N WEPAGE F CASES Owen BT Lat 15 3N 15 3N 15 6N 16 5N 16 7N 17 5N 17 7 5N 18 1N 19 3N 20 2N 21 8N 21 8N 22 31 N 24 4N	127 5E 129 6E 132 5E 132 5E (06W) BT Lon 135 3E 134 3E 132 4E 132 6E 129 9E 129 2E 128 6E 127 6E 127 6E 127 6E 127 3E 127 3E	28 107 51 34 23 15 Pos Er 24 35 24 59 13 6 6 6 27 7 6 0 30 8 8 8 0 0	11 24 Er 106 49 68 129 52 42 38 38 85 70 66 38 142	7 48 Er 165 69 111 147 54 109 132 172 242	3 72 Er 203 17 74 86 157	50 45 30 8T Wn 30 35 35 35 35 35 40 45 50 50 45 40 40 40 40 35 35 35	0 0 0 10 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	10 10 10 10 5 5 15 20 10 0	10 20 30 35 15 25 30 30	30 35 55 55 35
86062418 86062506 86062506 DTG 86062800 86062806 86062812 86062912 86062912 86062918 86062918 86063006 86063012 86063012 86063016 86063016 86063016 86063016	13 14 15 #OI #OI 12 3 4 5 6 7 8 9 10 11 12 13 14 15	32 1N 34 5N 36 3N WEPAGE F CASES Owen BT Lat 15 3N 15 3N 16 0N 16 5N 16 7N 17 5N 18 1N 18 7N 19 3N 18 7N 19 3N 20 2N 21 8N 23 1N	127 5E 129 6E 132 5E 132 5E (06W) BT Lon 135 3E 134 3E 133 2E 132 4E 131 5E 132 9E 129 2E 128 6E 128 0E 127 6E 127 6E 127 6E 127 2E 127 3E	28 107 51 34 23 15 Pos Er 24 35 24 59 13 6 6 6 6 6 6 0 30 8 8 8	11 24 Er 106 49 68 129 52 42 38 38 85 70 66 38 142	7 48 Er 165 69 111 147 54 109 132 172 242	3 72 Er 203 17 74 86 157	50 45 30 8T Wn 30 35 35 35 35 40 45 50 50 45 40 40 40 35	0 0 10 10 10 10 10 10 10 10 10 10 10 10	10 10 10 10 5 5 15 20 10 0	10 20 30 35 15 25 30 30	30 35 55 55 35
86062418 86062506 86062506 B6062800 86062800 86062818 86062900 86062912 86062912 86062912 86062912 86063016 86063016 86063012 86063018 86070108	13 14 15 #OI #OI **OI **OFM** **** **** **** **** *** *** *** ***	32 1N 34 5N 36 3N WEPAGE F CASES Owen BT Lat 15 3N 15 3N 15 6N 16 5N 16 7N 17 5N 17 7 5N 18 1N 19 3N 20 2N 21 8N 21 8N 22 31 N 24 4N	127 5E 129 6E 132 5E 132 5E (06W) BT Lon 135 3E 134 3E 132 4E 132 6E 129 9E 129 2E 128 6E 127 6E 127 6E 127 6E 127 3E 127 3E	28 107 51 34 23 15 Pos Er 24 35 24 59 13 6 6 6 27 7 6 0 30 8 8 8 0 0	11 24 Er 106 49 68 129 52 42 38 38 85 70 66 38 142	7 48 Er 165 69 111 147 54 109 132 172 242 197	3 72 Er 203 17 74 86 157	50 45 30 8T Wn 30 35 35 35 35 35 40 45 50 50 45 40 40 40 40 35 35 35	0 0 0 10 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	10 10 10 10 5 5 15 20 10 0	10 20 30 35 15 25 30 30	30 35 55 55 35
86062418 86062506 86062506 B6062800 86062800 86062818 86062900 86062912 86062912 86062912 86062912 86063016 86063016 86063012 86063018 86070108	13 14 15 #Oltorm W# 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17	32 1N 34 5N 36 3N WEFAGE F CASES Owen BT Lat 15 3N 15 6N 16 5N 16 7N 17 5N 18 7N 19 3N 20 2N 21 8N 23 1N 24 4N 25 7N	127 5E 129 6E 132 5E 132 5E (06W) BT Lon 135 3E 134 3E 132 4E 132 6E 129 9E 129 2E 128 6E 127 6E 127 6E 127 6E 127 3E 127 3E	28 107 51 34 23 15 Pos Er 24 35 24 59 13 6 6 6 27 6 0 30 8 8 8 0 13	11 24 Er 106 49 68 129 52 42 38 38 85 70 66 38 142 60	7 48 Er 165 69 111 147 54 109 132 172 242 197	3 72 Er 203 17 74 86 157 229	50 45 30 8T Wn 30 35 35 35 35 35 40 45 50 50 45 40 40 40 40 35 35 35	0 0 0 10 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	10 10 10 10 5 5 15 20 10 0	10 20 30 35 15 25 30 30	30 35 55 55 35
86062418 86062500 86062506 B6062800 86062800 86062818 86062818 86062912 86062912 86062912 86062912 86063006 86063012 86063012 86063018 86070100 86070118	13 14 15 #OI #OI 12 3 4 4 5 6 7 8 9 10 11 12 13 14 15 15	32 1N 34 5N 36 3N WEFAGE FCASES Owen BT Lat 15 3N 15 3N 15 6N 16 3N 16 5N 16 7N 17 5N 18 1N 19 3N 20 2N 21 8N 22 31N 24 4N 25 7N	127 5E 129 6E 132 5E 132 5E 132 5E 134 3E 134 3E 133 2E 139 6E 129 9E 129 2E 128 6E 127 6E 127 6E 127 6E 127 6E 127 6E 127 6E 127 6E 127 6E 127 6E	28 107 51 34 23 15 Pos Er 24 35 24 59 13 6 6 6 6 27 6 0 30 8 8 8 0 13	11 24 Er 106 49 68 129 52 42 38 38 85 70 66 38 142 60	7 48 Er 165 69 111 147 54 109 132 172 242 197	3 72 Er 203 17 74 86 157 229	50 45 30 8T Wn 30 35 35 35 35 35 40 45 50 50 45 40 40 40 40 35 35 35	0 0 0 10 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	10 10 10 10 5 5 15 20 10 0	10 20 30 35 15 25 30 30	30 35 55 55 35
86062418 86062506 86062506 86062800 86062800 86062806 86062812 86062906 86062912 86062918 86063000 86063012 86063012 86063018 86070100 860701108	13 14 15 #Oldorm W# 1 2 3 4 4 5 6 7 8 9 9 10 11 12 13 14 15 16 17	32 1N 34 5N 36 3N WEFAGE CASES Owen BT Lat 15 3N 15 3N 15 6N 16 5N 16 7N 17 0N 17 0N 18 1N 19 3N 20 2N 21 8N 23 1N 23 1N 24 4N 25 7N	127 5E 129 6E 132 5E 132 5E (06W) BT Lon 135 3E 134 3E 133 2E 132 4E 131 5E 129 9E 129 2E 128 6E 127 0E 127 2E 126 8E 127 0E 127 3E 127 3E 127 3E 127 6E	28 107 51 34 23 15 Pos Er 24 35 24 59 13 6 6 6 27 6 0 30 8 8 8 0 13 13	11 24 Er 106 49 68 129 522 42 38 38 85 70 66 38 142 60	7 48 Er 165 69 111 147 54 109 132 172 242 197	3 72 Er 203 17 74 86 157 229	50 45 30 BT Wn 30 35 35 35 35 35 40 45 40 40 40 40 35 35 35	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	10 10 10 10 5 5 15 20 10 0 0 5 0	10 20 30 35 15 25 30 30 15 5	30 35 55 55 35 35
86062418 86062506 86062506 86062800 86062800 86062806 86062812 86062906 86062912 86062918 86063000 86063012 86063012 86063018 86070100 860701108	13 14 15 #OI #OI 12 3 4 4 5 6 7 8 9 10 11 12 13 14 15 15	32 1N 34 5N 36 3N WEFAGE FCASES Owen BT Lat 15 3N 15 3N 15 6N 16 3N 16 5N 16 7N 17 5N 18 1N 19 3N 20 2N 21 8N 22 31N 24 4N 25 7N	127 5E 129 6E 132 5E 132 5E (06W) BT Lon 135 3E 134 3E 133 2E 132 4E 131 5E 129 9E 129 2E 128 6E 127 0E 127 2E 126 8E 127 0E 127 3E 127 3E 127 3E 127 6E	28 107 51 34 23 15 Pos Er 24 35 24 59 13 6 6 6 27 6 0 30 8 8 8 0 13 13	11 24 Er 106 49 68 129 522 42 38 38 85 70 66 38 142 60	7 48 Er 165 69 111 147 54 109 132 172 242 197	3 72 Er 203 17 74 86 157 229	50 45 30 BT Wn 30 35 35 35 35 35 40 45 40 40 40 40 35 35 35	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	10 10 10 10 5 5 15 20 10 0 0 5 0	10 20 30 35 15 25 30 30	30 35 55 55 35 35
86062418 86062506 86062506 86062800 86062800 86062806 86062812 86062906 86062912 86062918 86063000 86063012 86063012 86063018 86070100 860701108	13 14 15 #Oldorm W# 1 2 3 4 4 5 6 7 8 9 9 10 11 12 13 14 15 16 17	32 1N 34 5N 36 3N WEFAGE CASES Owen BT Lat 15 3N 15 3N 15 6N 16 5N 16 7N 17 0N 17 0N 18 1N 19 3N 20 2N 21 8N 23 1N 23 1N 24 4N 25 7N	127 5E 129 6E 132 5E 132 5E (06W) BT Lon 135 3E 134 3E 133 2E 132 4E 131 5E 129 9E 129 2E 128 6E 127 0E 127 2E 126 8E 127 0E 127 3E 127 3E 127 3E 127 6E	28 107 51 34 23 15 Pos Er 24 35 24 59 13 6 6 6 27 6 0 30 8 8 8 0 13 13	11 24 Er 106 49 68 129 522 42 38 38 85 70 66 38 142 60	7 48 Er 165 69 111 147 54 109 132 172 242 197	3 72 Er 203 17 74 86 157 229	50 45 30 BT Wn 30 35 35 35 35 35 40 45 40 40 40 40 35 35 35	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	10 10 10 10 5 5 15 20 10 0 0 5 0	10 20 30 35 15 25 30 30 15 5	30 35 55 55 35 35

```
149.2E
                                    23
                                           74
                                                 116
                                                        189
                                                                40
                                                                              20
                                                                                     35
                                                                                            40
86070312
                 14.1N
            3
                                                                45
                                                                       10
                                                                              30
                                                                                     40
                                                                                            40
                                           18
                                                  54
                                                         71
                 14 3N
                         147 RF
                                    12
86070318
             4
                                                         90
                                                                        0
                                                                              20
                                                                                     30
                                                                                            35
                                                  49
                                                                55
86070400
             5
                 14 4N
                         146 4E
                                     6
                                           12
                                                                                            25
                                                                        ٥
                                                                              20
                                                                                     30
86070406
                 14.6N
                         145 2E
                                     8
                                           27
                                                  78
                                                        212
                                                                60
86070412
                 14.7N
                         144 0E
                                    12
                                           55
                                                 154
                                                        298
                                                                70
                                                                        0
                                                                              15
                                                                                     35
                                                                                            15
                 14.8N
                         142 7E
                                    17
                                           61
                                                 125
                                                        198
                                                                85
                                                                       15
                                                                              25
                                                                                     30
                                                                                            10
86070418
                                                 105
                                                        177
                                                                95
                                                                              10
                                                                                     20
                                                                                            10
86070500
                 15.0N
                         141.3E
                                     0
                                           54
                                                 170
                                                        371
                                                                100
                                                                        0
                                                                               5
                                                                                      - 5
86070506
                 15 ON
                         140 0E
                                     6
                                           62
           10
                                                 269
                                                        484
                                                               105
                 15 1N
                         138 7F
                                     0
                                           79
86070512
           11
                 15.3N
                                                 293
                                                        524
                                                               115
                                                                                     20
                                                                                            35
86070518 12
                         137.3E
                                     6
                                          100
                                                               120
                                                                              10
                                                                                     10
                                                                                            45
                                           25
                                                 109
                                                        345
86070600 13
                 15 5N
                         136.0E
                                     6
                                                                        0
                                                                                     20
                                                                               5
                                                                                            45
86070606 14
                 15 7N
                         134 5E
                                    12
                                           21
                                                 213
                                                        462
                                                               125
                                                                        5
                                                                              15
                                                                                     25
                 16 0N
                         133 2E
                                     0
                                           60
                                                 292
                                                        520
                                                               135
                                                                                            45
86070612 15
                 16 4N
                                                                        0
                                                                                            45
86070618 16
                         131 8E
                                          138
                                                 377
                                                        573
                                                               135
                                                                              15
                                                                                     30
                 16.7N
                         130.4E
                                     8
                                          155
                                                 386
                                                        608
                                                               140
                                                                        0
                                                                              20
                                                                                     40
                                                                                            50
86070700 17
                                                 374
                                                               135
                                                                              15
                                                                                     35
                                                                                            55
                                          146
                                                        602
                 16.9N
                         129.0E
                                     6
86070706 18
                                                                        0
                                                                               0
                                                                                     20
                                                                                            15
                 17 1N
                         127 7F
                                          132
                                                 309
                                                        503
                                                               130
86070712 19
                                    1.3
                                                 309
                                                        525
                                                               125
                                                                                     15
                                    25
86070718 20
                17 3N
                         126 5F
                                          151
                                                                                     10
                                                                                            15
86070800 21
                 17 3N
                         125.6E
                                     8
                                           18
                                                 103
                                                        183
                                                               120
                                                 114
                                                               115
                                                                              10
                                                                                     25
                                                                                            15
86070806 22
                 17 4N
                         124.6E
                                     6
                                           38
                                                        210
                                                                        0
                                                 156
                                                               110
                                                                               5
                                                                                     25
86070812 23
                 17.6N
                         123.6E
                                     0
                                           79
                                                        175
                                                                              15
86070818 24
                 17.8N
                         122.7E
                                    17
                                          116
                                                 198
                                                               100
                                                                        a
                                                                                      n
                                           17
                                                  41
                                                                90
                                                                        0
                                                                              10
                                                                                      5
86070900 25
                 17.9N
                         122.0E
                                     0
                                                  22
                                                                85
                                                                        0
                                                                              10
                                                                                     20
                 18.1N
                         121.4E
                                     6
                                           34
86070906 26
                                           41
                                                                80
                                                                         0
                                                                               10
                                                                                      10
                         120.8E
86070912 27
                 18.6N
                                     6
                                                                         0
                                                                               0
                                    21
                                           59
                                                                75
                 19.1N
                         120 2F
86070918 28
                                                                70
                                     8
86071000 29
                 19.5N
                         119.4E
                                           49
86071006 30
                 19.9N
                         118 BE
                                     6
                                           58
                                                                65
86071012
           31
                 20.7N
                         118.2E
                                    21
                                           69
                                                                65
                                                                               15
                                                                         0
                 21 4N
                         117.4E
                                    17
                                                                65
86071018 32
                                                                60
                                                                         0
86071100 33
                 22.3N
                         116.6E
                                     6
                                                                 50
                                                                         5
                 22.9N
                         115.7E
86071106 34
                                    16
                                                                40
86071112 35
                23.5N
                         114 8F
                                                 172
                                                        332
               AVERAGE
                                    1 1
                                           68
             # OF CASES
                                    35
                                           31
                                                  27
                                                         23
Typhoon Roger (08W)
                 BT Lat BT Lon Pos Er 24 Er 48 Er 72 Er BT Wn WW Er 24 WE 48 WE 72 WE
   IJΤG
           W.
                                                        211
                                                                 40
                                                                               30
                 16 7N
                                                 174
86071300
                         139 4F
                                     ٥
                                          108
                                                        218
                                                                         0
                                                                                0
                                                                                      ١٥
                                                 177
                                                                 45
86071306
                 17 6N
                         138 1E
                                    50
                                          128
                                                        232
                                                                 55
                                                                         0
                                                                                O
                                                                                      10
                                                                                             25
                         137 0E
                                    18
                                           51
                                                 117
86071312
             3
                 18 6N
                                                                                             35
                                    23
                                                                                       0
                                                 138
                                                         311
                                                                 60
                                                                                0
                 19.6N
                         136 1E
                                            66
86071318
             4
                                                                                       5
                                                                                             15
                         135 1E
                                     8
                                                  71
                                                          16
                                                                 65
                                                                         5
                                                                                5
86071400
             5
                 20 6N
                                                  130
                                                                 65
                                                                         0
                                                                              25
                                                                                     25
86071406
                 21 4N
                                     6
                                            49
                         134 1E
             6
                                                   8 1
                                                                 65
                                                                               35
                                                                                     25
                                            48
86071412
                 22 3N
                         133 OF
                                     6
                                                   39
                                                                 70
                                                                               30
                                                                                      15
                                            40
86071418
             8
                 23 0N
                         132 0E
                                     n
                                                                         0
                                                                               1.5
                                                                 75
86071500
             9
                 23 9N
                         131 1E
                                     55
                                            79
                                                   1.8
                                                                         5
                                                                               1.5
                                                                 80
86071506
            10
                 24 6N
                         130 5E
                                     12
                                            91
                                           20
                                                                 85
                                                                               1.0
B6071512
            1.1
                 25 2N
                         129 9E
                                     6
                                                                 80
                                                                        1.0
                                            65
86071518
                         129.4E
                                     6
            12
                 25 8N
                                                                 75
                                                                         0
                                                                                0
                         129 1E
                                           94
 86071600 13
                 26 4N
                                     6
                                                                 70
 86071606
            14
                 27 2N
                         128 9E
                                     0
                                           109
                                                                 65
                                                                         0
 86071612 15
                 28 2N
                         129 2E
                                     12
                                          157
                                                                 55
                                                                         0
                 29 3N
                          129 6E
                                     0
 86071618
            16
                                                                 55
                                                                         0
86071700
                 30 6N
                         130 7E
86071706 18
                 3 · 9N
                         132 48
                                     8
                                                                 45
                                                                         0
 86071712 19
                                                                 45
                         134 8E
                                     8
                 32 8N
                                     . 5
                                            : 5
                                                  105
               AVERAGE
                                            • 5
                                     • 9
                                                    9
             # OF CASES
Tropical Storm Sarah (09W)
                                                       12 Er BTWH WW Er 24 WE 48 WE 12 WE
                                 Pos Er 24 Er 48 Er
                         BTion
                  BTLat
           W#
   DIG
                                           139
                                                  190
                 • 5.2N
                                    24
 86013012
                          130 SE
                                                                                      ٠,
                                                                                              C
                                                  25:
                                                         564
                                                                               • 0
                                            85
                 15 5N
                          129.36
 86013018
 860/3100
                                                         693
                                                                                0
                                     ٠,
                                            96
                                                  34 1
                 15 9N
                         128 °F
                                           . . . 2
                                                  453
                                                         806
 860 13106
                 16.3N
                          126.98
                                                         831
                                                                 4.0
                                                                                             20
                                           • 83
                                                  495
 860/3112
                 16.6N
                          125 BE
                                                         9 ...
                                                                 40
 86013118
                 .6 'N
                          *25 0E
                                           182
                                                  562
                                                        1092
                                                                 45
 86080130
                 16.9N
                         124 2F
                                     18
                                          . . .
                                                  562
                                                                 4 5.
 86080106
             R
                 17.1N
                          .24.28
                                     52
                                          324
                                                  · 26
                                                        . 294
 86080112
                 · : 4N
                                                  776
                                                                 45
                                    .23
                                          44.
                          124 OF
 86080 8
                                    160
                                          506
                                                  893
                                                                 45
                 18.3N
                          124 1
                                                                 45
 86080200 ...
                                   288
                                          623
                 18.5N
                          124.88
                                                                 41,
                                           + 8
                                                  4.9
 86080206 12
                 14 514
                         125 38
                                    23
                                                 1000
 85080212 13
                 19.8N
                         126,28
                                           * A 3
```

```
86080218 14
                20.5N
                        126.9E
                                   11
                                         306
                                              1186
                                                               50
                                                                             - 5
                                                                                     5
86080300 15
                21.3N
                        127.8E
                                    6
                                         245
                                                               55
                                                                      - 5
                                                                              0
                        128.5E
                                         414
                                                               50
                                                                       0
86080306 16
                22.0N
                                   13
                                                                             10
                                         332
                                                               50
                        129 SF
                                   39
                                                                      . 5
86080312 17
                23 3N
86080318 18
                25.3N
                        131.6E
                                   42
                                         439
86080400 19
                27.8N
                        133.8F
                                   24
                                                               40
                                                                       0
86080406 20
                30.3N
                        136.7E
                                   71
                                                               35
                                                                       5
86080412 21
                33.3N
                        139.9E
                                   51
                                                               30
                                                                       5
86080418 22
                36.2N
                        143.0E
                                  173
               AVERAGE
                                   55
                                         273
                                                671
                                                       800
            # OF CASES
                                   22
                                          18
                                                 14
                                                         8
Typhoon Georgette (11E)
                BT Lat BT Lon Pos Er 24 Er 48 Er 72 Er BT Wn WW Er 24 WE 48 WE 72 WE
          W#
                        176 3E
                                    8
                                          44
86080906
                14 6N
                                                                             10
                        175.1E
                                          58
                                                294
                                                       574
                                                               45
                                                                                    25
                                                                                           40
86080912
                14 9N
                                    6
                        173 9F
                                          92
                                                346
                                                       583
                                                               45
                                                                       5
                                                                              5
                                                                                    20
                                                                                           40
86080918
                15 1N
                                    6
                                                                                          25
                                         144
                                                391
                                                       578
                                                               50
                                                                              0
                                                                                    10
86081000
                15.3N
                        172.7E
                                    13
                                                                       5
86081006
                15.4N
                         171.7E
                                   13
                                         101
                                                327
                                                       432
                                                               55
                                                                       0
                                                                             10
                                                                                    30
                                                                                           50
                                                                             15
                15.6N
                         170.9E
                                   17
                                         179
                                                458
                                                       521
                                                               60
                                                                       ۵
                                                                                    35
                                                                                           60
86081012
                        170.4E
86081018
                15.7N
                                         184
                                                358
                                                       366
                                                               65
                                                                             10
                                                                                    30
                                                                                           65
                                         127
                                                251
                                                               65
                                                                              0
                                                                                     ٥
                                                                                           40
86081100
                15 9N
                        170 0E
                                    6
                                                       208
                                         134
                                                228
                                                       262
                                                               65
86081106
                        169 7E
                                    18
                16.0N
                                                               65
                                                                              5
                                                                                    25
                                                                                           45
                                                198
                                                       366
                                                                       0
                        169 5F
                                   12
                                          91
86081112 10
                16.2N
                                                                              5
                                                                                    30
                                                                                           45
                                         113
                                                               65
                                                217
                                                       430
                                                                       ٥
86081118 11
                16.5N
                        169.4E
                                   37
                                                                              5
                                                                                    35
                                                                                           45
                                                               65
                                                                       ۵
86081200 12
                16.7N
                         169.4E
                                   27
                                         138
                                                366
                                                       530
                                                                             25
                                                                                           55
86081206 13
                17.1N
                         169.1E
                                   24
                                         174
                                                472
                                                       397
                                                               60
                                                                      10
                                                                                    40
86081212 14
                17.5N
                         168.5E
                                    8
                                         162
                                                491
                                                       170
                                                               60
                                                                       5
                                                                             30
                                                                                    45
                                                                                           55
                         167.9E
                                    24
                                         217
                                                596
                                                        66
                                                               60
                                                                       0
                                                                             15
                                                                                    15
                                                                                           20
86081218 15
                18.2N
86081300 16
                19.0N
                         167.3E
                                         272
                                                548
                                                               60
                                                                       0
                                                                             15
                                                               50
                                                                              5
                                    8
                                         306
                                                                       ٥
86081306 17
                19 7N
                         166.3E
86081312 18
                20 5N
                         164.3F
                                    0
                                         244
                                                               45
                                                                       0
                                                                             10
                                         151
                                                               40
                                                                       0
                                                                             10
                         162 1F
                                   29
86081318 19
                20 8N
86081400 20
                21.2N
                         159.9E
                                    6
                                                               35
                                                                       0
                                                                       ٥
86081406 21
                22.0N
                         157.4E
                                   25
                                                               35
86081412 22
                22.4N
                         154.8E
                                   24
                                                               35
                                                                      ٠5
86081418 23
                21 7N
                         151.8E
                                    16
                                                               35
                                                                       0
                                                               35
                                                                       0
86081500 24
                20 ON
                         152.0E
                                    6
                                                                       0
                                                               30
86081506 25
                19.1N
                        153.2E
                                    17
                                                               30
                                                                       5
86081512 26
                19.2N
                        155.6E
                                   13
                                                       374
               AVFRAGE
                                    16
                                         154
                                                363
            # OF CASES
                                   26
                                          19
                                                 17
                                                        16
Typhoon Tip (10W)
                BT Lat BT Lon Pos Er 24 Er 48 Er 72 Er BT Wn WW Er 24 WE 48 WE 72 WE
          W#
   DTG
                                         128
                                                279
                                                       387
                         156.9E
86081306
                18.7N
                                     6
                                                               55
                                                                       ٥
                                                                             15
                                                                                    30
                                                                                           20
                                         176
                                                       541
                         156.4E
                                                393
86081312
            2
                18 8N
                                    11
                                                                             20
                                                               55
                                                                       5
                                                                                    35
                                                                                           35
                                         176
                                                392
                                                       558
86081318
                18 8N
                         155.9E
                                    6
86081400
                18 6N
                         156.1E
                                    18
                                         144
                                                326
                                                       436
                                                               60
                                                                       0
                                                                             20
                                                                                    15
                                                                                           30
86081406
                19 0N
                         156 4E
                                         168
                                                329
                                                       444
                                                               60
                                                                       ٥
                                                                             20
                                                                                    10
                                                                                           30
86081412
                         156.4E
                                         148
                                                284
                                                       490
                                                               60
                                                                       ٥
                                                                             15
                                                                                    10
                                                                                           40
                19 5N
86081418
                19 9N
                         156 4E
                                    6
                                         135
                                                256
                                                       534
                                                               60
                                                                       ٥
                                                                              5
                                                                                    15
                                                                                           45
                                                                              5
                                                                                    20
                                                                                           45
                         156 3E
                                         165
                                                296
                                                       710
86081500
             8
                20 5N
                                   25
                                                                             15
                                                                                    15
                                                                                           40
86081506
                21 3N
                         156.2F
                                    24
                                         145
                                                262
                                                       726
                                                               60
                                                                             10
                22 7N
                                          41
                                                371
                                                       917
                                                               60
                                                                       0
                                                                                    15
                                                                                           35
                         155.9F
                                   24
86081512
           10
                                                                             20
                                                                                    20
                                                       980
                                                               65
                                                                      . 5
86081518
                23 7N
                         154 BE
                                    13
                                         208
                                                562
                                                      1274
                                                               75
                                                                             10
                                                                                           50
                                                                      10
                                                                                    30
86081600
           12
                24 4N
                         154 0E
                                    16
                                         208
                                                695
                                                                      15
                                                                             10
86081606 13
                24 9N
                         153 5E
                                    16
                                         156
                                                636
                                                      1065
                                                               80
                                                                                    30
                                                                                           50
86081612
                25 2N
                         153 2E
                                    17
                                         231
                                                654
                                                      1126
                                                               80
                                                                       5
                                                                             20
                                                                                    40
                                                                                           50
                                         290
                                                715
                                                      1121
                                                               75
                                                                       0
                                                                             25
                                                                                    40
                                                                                           55
86081618
                25 4N
                         153 0E
                                    28
                                                739
                                                               70
                                                                       0
                                                                             20
                                                                                    35
                                                                                           55
                         152 9E
                                    1.1
                                         310
                                                      1071
86081700 16
                25.7N
                                                                70
                                    47
                                                                       0
                                                                              5
                                         353
                                                676
86081706 17
                26 2N
                         153 3E
                                                181
                                                               65
                                                                       0
                                                                             10
86081712 18
                26 5N
                         154 AF
                                    29
                                         113
                                                                             ٠5
                                         151
                                                               60
                                                                       0
86081718 19
                26 8N
                         155 4E
                                    22
                                                                             10
86081800 20
                27 ON
                         156 78
                                    32
                                         236
                                                                60
                                                                       0
                                                                             10
                         157 7E
                                    37
                                          108
                                                                60
                                                                       0
86081806 21
                27 ON
86081812 22
                27 ON
                         158 7E
                                    • 7
                                          166
                                                                55
                                                                       0
                                                                              0
                                                                55
                                                                              0
8508'8'8 23
                27 ON
                         159.8F
                                    34
                                          189
                                                                50
                27 'N
                         161.2E
                                    63
86081900 24
                27.5N
                         162 5E
 86081306 25
                                    41
               AVERAGE
                                    24
                                          180
                                                447
                                                        774
```

OF CASES

Tropical	Storm	Voradi	/4414/1									
Tropical DTG	Storm W#	Vera#1 BT Lat			24 E.	10 5.	70 F-	OT 14/-	1454/ F-	04.145	40 1445	70 14/5
DiG	***	DI LAR	BT Lon	FUS EI	24 Ef	48 Er	/2 Er	DI WI	MAM EL	24 WE	48 WE	72 WE
8608151	B 1	19.0N	129.4E	13	177	226		30	0	15	35	
8608160		18.9N	129.6E	13	167			35	ō	15		
8608160	6 3	18.8N	129.8E	83	227			35	0	30		
8608161	2 4	18.6N	129.9E	80	100			35	0	15		
8608161		18.4N	129.9E	105	81			40	- 5	15		
8608170		18.2N	129.8E	17				40	0			
8608170	6 7	17.9N	129.0E	65				30	10			
		AVERAGE		54	150	226						
		FCASES		7	5	1	0					
	- 0.			•	•	•	·					
Typhoon	Vera#	2 (11W))									
DIG	W#	BT Lat	BT Lon	Pos Er	24 Er	48 Er	72 Er	BT Wn	WW Er	24 WE	48 WE	72 WE
86081712		21.3N	137.0E	69	151	215	583	30	10	0	0	-20
86081718 86081800	_	22.1N 22.5N	137.4E 137.6E	45 72	140 295	312 686	699 1021	35 40	5 0	0 - 5	- 5 - 25	·25 ·50
86081806		22.9N	137.7E	8	232	576	859	40	0	· 5	-25	-60
86081812		23.5N	137.9E	12	236	554	876	45	ő	5	-30	-65
86081818		23.5N	137.4E	37	306	604	918	45	5	5	-30	-70
86081900	7	22.7N	137.9E	0	27	434	706	50	0	-10	-30	-65
86081906		22.6N	138.8E	50	297	484	734	50	0	-20	-40	-60
86081912		22.7N	140.1E	8	179	272	450	50	0	-20	- 50	-60
86081918		22.4N	141.0E	8	151	194	353	55	0	-15	-50	- 5 5
86082000		21.4N	141.5E	13	90	62	251	65	5	5	-10	0
86082006 86082012		21.3N 21.3N	142.0E 142.5E	27	64 62	134 143	388 481	70 75	5 5	- 5	-10	5
86082018		21.3N	143.0E	6 12	42	201	592	80	0	-10 -15	- 5 - 5	5 5
86082100		21.4N	143.4E	6	33	156	520	85	- 5	-20	0	10
86082106		21.5N	144.1F	6	34	271	629	95	- 5	- 5	30	35
86082112	17	21.6N	144.7E	8	83	352	719	100	0	15	35	35
86082118	18	21.7N	145.2E	13	83	376	726	105	0	20	35	35
86082200		21.9N	145.6E	6	147	455	852	110	0	30	40	35
86082206		22.1N	145.7E	11	222	537	953	110	5	40	40	35
86082212		22.2N	145.4E	11	192	469	825	105	15	35	35	30
86082218		22.2N	145.0E	18	219 126	480	787	105 100	0	-15	-25	-30
86082300 86082306		22.2N 22.1N	144.4E 143.4E	17	162	401 451	666 690	95	Ö	- 5 - 1 0	-15 -20	-10 -20
86082312		22.1N 22.2N	142.4E	6	45	226	322	95	ö	0	-10	-20
86082318		22.2N	141.0E	ŏ	39	212	289	95	ŏ	- 5	-10	-20
86082400		22.3N	140.0E	33	67	243	272	90	0	0	10	20
86082406	28	22.8N	138.7E	18	105	253	286	90	0	0	10	25
86082412		23.0N	137.2E	6	114	184	180	90	5	10	5	10
86082418		23.4N	135.3E	17	104	101	167	90	0	- 5	-15	- 5
86082500		23.9N	133.6E	13	92	61	214	90	0	-10	-15	-10
86082506 86082512	_	24.5N 25.0N	132.0E 130.3E	18	40 52	114	479 169	90 90	-10 0	-10 -15	-10 5	· 5 15
86082518		25.5N	128.8E	12	100	63	188	85	ŏ	-10	5	15
86082600		26.1N	127.5E	8	87	51	392	85	ō	- 5	5	20
86082606		26.7N	126.3E	13	72	128	311	85	0	0	10	30
86082612	37	27.3N	125.5E	21	59	133		90	0	5	20	
86082618		27.9N	125.0E	16	86	186		85	0	5	20	
86082700		28.8N	124.6E	12	93	396		80	0	5	20	
86082706		29.9N	124.2E	22	139	367		75 70	0	20	25	
86082712 86082718		31.1N 32.3N	124.3E 124.7E	24 8	169 75			70 6 5	0	10 - 5		
8608280		32.3N 33.7N	125.3E	36	405			65	- 5	0		
8608280		35.2N	126.1E	12	247			60	. 5	10		
8608281		36.7N	127.1E	6	_ ••			50	ō			
8608281	8 46	38.3N	128.6E	11				45	0			
8608290		39.9N	130.4E	8				40	0			
8608290	6 48	42.6N	132.5E	55				30	0			
						200	E 4 2					
		F CASES		17 48	131	289 40	543 36					
	• •	(A)ES		70	74	70	30					
Typhoon	Wayne	(12W)										
DTG	We		8T Lon	Pos Er	24 Er	48 Er	72 Er	8T Wn	WW Er	24 WE	48 WE	72 WE
	_											
8608180		15.8N	117 1E	12	115	212	374	35	0	20	- 15	-10
8608181		16 1N	116 6E	29	73	170	422	45	-10	.20	- 5	-15
8608181		16 4N	115.9E	17	46	149	407	55	- 10	-15	- 5	- 30
8608190		17 1N	115.4E 114. 8 E	13	53 42	227 273	472	60 65	0	5 15	. 20	-30
8608190 8608191		17 8N 18.4N	114.0E	8	95	361		65 65	5	10	- 50	
8608191		19 ON	113.5E	24	172	410		70	ő	20	60	
8608200		19 7N	113.3E	0	218	_		70	0	- 5		

86082006 86082012 86082018 86082100 86082112 86082112 86082206 86082212 86082212 86082312 86082312 86082312 86082312 86082412 86082412 86082412 86082418	10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27	20.4N 21.1N 21.8N 22.3N 22.8N 23.2N 23.7N 24.7N 25.0N 24.9N 24.4N 24.4N 23.7N 23.7N 23.2N 23.7N 21.7N 21.7N	113.6E 114.3E 115.1E 116.3E 117.3E 119.3E 120.4E 121.7E 123.0E 124.1E 124.7E 125.2E 124.6E 123.9E 123.5E 121.4E 119.9E	6 13 13 17 13 11 11 20 22 8 30 21 12 16 13 11 32 16 30 51	161 149 168 65 65 77 141 156 256 338 318 380 275 80 239 208 139	199 197 210 193 243 420 672 783 837	322 443 554 501 608 816 1069 1158	70 655 70 75 85 80 70 50 55 55 55 55 60 65 53 30	0 0 0 5 - 5 - 15 5 0 15 20 20 - 10 - 15 - 20	-50 -60 -55 -20 -40 -5 -5 -30 -20 -15 -0 0	-10 -5 -5 0 10 25 40 25 0	-10 0 10 35 55 55 65 30
86082506 86082800 86082818 86082918 86082906 86082918 86082918 86083000 86083000 86083106 86083118 86083118 86090100 860901118 860901118	29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50	20.8N 19.7N 20.1N 20.3N 20.6N 20.6N 20.7N 20.8N 21.1N 21.7N 21.9N 21.9N 21.6N 21.4N 21.1N 20.8N	117.6E 120.2E 120.6E 120.9E 121.0E 121.1E 121.2E 121.3E 121.4E 122.4E 122.4E 122.4E 122.4E 122.4E 122.3E 123.2E 123.1E 123.2E 123.2E 123.2E 123.2E 123.2E 123.2E 123.2E	0 38 11 8 16 6 33 0 0 25 3 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 13 13 13 13 13 14 14 15 15 15 15 15 15 15 15 15 15 15 15 15	160 160 131 70 6 99 30 29 36 119 126 108 119 138 116 145 119 109 225 21	354 252 211 102 40 193 115 169 192 287 331 314 340 337 150 150 131 132 460	597 379 365 254 168 374 362 390 414 445 497 450 477 504 497 539 482 165 242 331	30 35 40 40 40 45 50 55 70 70 75 70 75 85 85	0 0 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	5 20 15 -5 -5 -5 -5 -5 -5 -5 -5 -5 -5 -5 -5 -5	-55 155 -100 -255 -100 -55 55 155 255 200 155 -15 -100	-15 10 0 0 -5 -15 -20 -10 5 35 30 30 35 20 0 -25 -15
86090206 86090212 86090213 86090300 86090306 86090312 86090406 86090412 86090418 86090500 86090500 86090512 86090518 86090518	52 53 54 55 56 57 58 59 60 61 62 63 64 65 66	19.2N 19.1N 19.3N 19.0N 18.5N 18.4N 18.4N 19.6N 19.6N 19.6N 20.3N 20.6N 20.3N 19.8N 19.7N	121.7E 121.3E 120.7E 120.0E 119.3E 118.5E 117.7E 116.8E 115.4E 113.7E 112.4E 111.2E 109.8E 106.7E 104.9E 103.2E	18 12 30 5 24 0 8 6 8 8 0 6 8 8 25 34 21	47 53 72 62 121 138 88 107 111 139 91 170	168 235 273 270 323 269 187 304 411	400 440 504 531 593 468 38	85 80 75 70 75 85 90 85 70 70 65 60 45	0 0 5 0 0 -5 -1 5 0 0 5 5 5 0 0 0 0 5 5 0 0 0 0 0 0 0	15 5 -5 -30 -25 -5 0 5 -10 -35 -30 -15	-5 -5 0 -15 -15 10 10 20 0	0 5 10 5 20
Typhoon A	\bby ₩#	(13W) BT Lat	8T Lon	Pos Er	24 Er	48 Er	72 Er	BT W n	ww Er	24 WE	48 WE	72 WE
86091306 86091312 86091318 86091400 86091412 86091412 86091500 85091500 86091512 86091518 86091600 86091600 86091600	6 7 8 9 10 11 12 13	12.0N 12.6N 13.4N 14 3N 15 1N 15 2N 15 8N 16 7N 17 7N 18 0N 18 3N 18 3N 19 3N 19 5N	146.2E 144.8E 142.5E 140.4E 138.2E 136.0E 135.0E 134.2E 133.4E 172.2E 131.2E 130.5E 129.5E	21 12 65 13 48 12 24 12 33 17 17 13 41	292 271 348 42 6 153 126 25 29 90 78 120	363 267 134 36 79 223 214 48 94 192 180 264 224	381 202 51 153 207 307 295 157 330 310 432 313	25 30 30 35 35 40 45 50 55 55 60 60 65	0 0 0 5 5 0 5 0 5 5 0	0 0 10 10 5 10 10 5 0 5 0 5	10 15 15 20 15 20 0 -5 -5 0	35 35 30 20 20 10 5 -5 -5 5

```
86091618 15
                19.6N
                        127.8E
                                   34
                                          57
                                                156
                                                       167
                                                               70
                                                                      . 5
                                                                            -10
                                                                                    - 5
                                                                                           15
                19 RN
                         127 2F
                                                        7.4
                                                                       ი
                                                                             - 5
                                                                                     ٥
                                                                                           40
86091700 16
                                     6
                                          74
                                                140
                                                               75
86091706
           17
                20.3N
                         126.6E
                                     8
                                          89
                                                 175
                                                       143
                                                               80
                                                                      - 5
                                                                             . 5
                                                                                     5
                                                                                           45
86091712 18
                20.8N
                         125.8E
                                          114
                                                 198
                                                        147
                                                                85
                                                                       0
                                                                              0
                                                                                    20
                                                                                           60
86091718
           19
                21.0N
                         125.1E
                                          115
                                                 143
                                                                85
                                                                                    30
86091800 20
                21.3N
                         124 3F
                                    18
                                          94
                                                  79
                                                                90
                                                                              15
                                                                                    50
                21.9N
                         123.6E
                                    13
                                          104
                                                 169
                                                               90
                                                                       5
                                                                             15
                                                                                    45
86091806 21
86091812 22
                22 3N
                         122 9F
                                          38
                                                  29
                                                               95
                                                                       0
                                                                             15
                                    n
86091818 23
                22.6N
                         122 1F
                                     ٥
                                           45
                                                               90
                                                                       ٥
                                                                             20
86091900 24
                23.2N
                         121 5E
                                     R
                                           12
                                                               90
                                                                        5
                                                                             25
86091906 25
                23.9N
                         121.2E
                                    19
                                           61
                                                                85
                                                                       5
                                                                             45
                24.6N
                         121.3E
                                    0
                                                                80
                                                                       10
86091912 26
                                          156
86091918 27
                25.4N
                         121.4E
                                    12
                                                                70
                                                                       10
                26.4N
                         121.8E
                                                                55
                                                                       0
86092000 28
                                   16
                27.6N
                         122.5E
                                                                45
                                                                        0
86092006 29
                                   36
                29.2N
                                                                35
86092012 30
                         123.7E
                                   20
               AVFRAGE
                                   19
                                          104
                                                160
                                                       225
            # OF CASES
                                   30
                                          26
                                                  22
                                                         18
Typhoon Ben (14W)
                BT Lat BT Lon Pos Er 24 Er 48 Er 72 Er BT Wn WW Er 24 WE 48 WE 72 WE
   OTTG
          W#
86091900
                10.5N
                         160.4E
                                   139
                                          380
                                                 469
                                                       590
                                                               30
                                                                        Ω
                                                                             10
86091906
                11.0N
                         159.8E
                                   12
                                         246
                                                307
                                                        411
                                                                35
                                                                        0
                                                                             10
                                                                                    20
                                                                                           50
            2
                                    49
                                          234
                                                222
                                                       242
                                                               35
                                                                        0
                                                                              10
                                                                                    15
                                                                                           50
86091912
            3
                11.8N
                         159.4E
                                                        197
                12.8N
                         159.1E
                                   57
                                          174
                                                 156
                                                                35
                                                                                    20
                                                                                           45
86091918
                                   17
                                          18
                                                  80
                                                       142
                                                                40
                                                                        0
                                                                                    25
                                                                                           40
86092000
            5
                13.8N
                         158.7E
                                   31
                                                  59
                                                                45
                                                                                    35
                                                                                           35
                15.1N
                         157.9E
                                          91
                                                         19
                                                                        0
                                                                             15
86092006
            6
                15.8N
                                    ٥
                                          108
                                                294
                                                       311
                                                                45
                                                                        5
                                                                                           45
86092012
            7
                         156 6F
                                                                             15
                                                                                    50
86092018
            8
                16.1N
                         155.3E
                                   39
                                          197
                                                355
                                                       345
                                                                50
                                                                       5
                                                                             25
                                                                                    50
                                                                                           40
86092100
            9
                16.3N
                         154.1E
                                   13
                                         150
                                                213
                                                        161
                                                               55
                                                                       5
                                                                             35
                                                                                    50
                                                                                           40
86092106
           10
                16.4N
                         153.2E
                                   29
                                          167
                                                 167
                                                       130
                                                               55
                                                                       10
                                                                             40
                                                                                    45
                                                                                           30
86092112
                16.5N
                         152.7E
                                   50
                                         156
                                                 109
                                                         86
                                                               60
                                                                      10
                                                                             45
                                                                                    40
           11
                         152.2E
                                         154
                                                 100
                                                         95
                                                               55
                                                                      15
                                                                             35
                                                                                    20
                                                                                            ٥
86092118
                16.6N
                                   68
           12
                                                                      10
                                                                              5
                                                                                   - 10
                                                                                          -20
                16 7N
                         151 7F
                                          64
                                                116
                                                         91
                                                               50
86092200
           13
                                    Я
86092206 14
                16.7N
                         151.3E
                                   12
                                         121
                                                162
                                                       108
                                                                45
                                                                       10
                                                                              5
                                                                                   - 15
                                                                                          -15
86092212 15
                16.8N
                         150.7E
                                    6
                                         153
                                                183
                                                        87
                                                               45
                                                                       5
                                                                             - 5
                                                                                   .25
                                                                                          -10
86092218 16
                16.9N
                         149.9E
                                   13
                                          173
                                                191
                                                       114
                                                               50
                                                                       5
                                                                            - 10
                                                                                   -30
                                                                                          - 10
                17.2N
                         148.7E
                                          30
                                                 50
                                                       174
                                                               55
                                                                       10
                                                                              5
                                                                                   -20
                                                                                           10
86092300
           17
                                    13
                         147.3E
                                                119
                                                       291
86092306 18
                17.5N
                                   26
                                          67
                                                                60
                                                                       10
                                                                                           10
                         146.0E
                                          51
                                                 125
                                                       287
                                                                70
                                                                       5
                                                                            - 10
                                                                                    ٠5
                                                                                           20
86092312 19
                17.8N
                                   13
                18.0N
                         144.8E
                                          57
                                                154
                                                       291
                                                                80
                                                                       0
                                                                            -15
                                                                                    - 5
                                                                                           20
86092318 20
                                   11
                                                               85
                18.4N
                         143.7E
                                                127
                                                       268
                                                                       5
                                                                            - 10
                                                                                    15
                                                                                           35
86092400 21
                                   1.3
                                          21
                                                                                    25
86092406 22
                18.7N
                         142.7E
                                   18
                                          62
                                                200
                                                       336
                                                               95
                                                                       0
                                                                              0
                                                                                           40
86092412 23
                19.2N
                         141.7E
                                    18
                                          102
                                                227
                                                       364
                                                              105
                                                                       O
                                                                             20
                                                                                    40
                                                                                           35
86092418 24
                 19.4N
                         140.8E
                                    18
                                          102
                                                253
                                                       386
                                                              115
                                                                        0
                                                                             25
                                                                                    45
                                                                                           40
86092500 25
                19.7N
                         140.0E
                                    6
                                          51
                                                 191
                                                       317
                                                              120
                                                                             20
                                                                                    20
                                                                                           20
                                                                        5
                         139.4E
                                     6
                                           84
                                                230
                                                        447
                                                              115
                                                                              10
                                                                                     5
                                                                                           10
86092506 26
                20.0N
                                                       339
                                                              110
                                                                        0
                                                                              5
                                                                                     0
                                                                                            - 5
                20.5N
                         139 1F
                                    12
                                           89
                                                245
86092512 27
                                                                                           - 5
86092518 28
                20.8N
                         138.8E
                                    18
                                           84
                                                243
                                                       369
                                                              110
                                                                       - 5
                                                                              0
                                                                                    - 5
86092600 29
                21.2N
                         138.7E
                                     6
                                           62
                                                 105
                                                       122
                                                              105
                                                                        n
                                                                             - 5
                                                                                   - 10
                                                                                          - 10
                21.4N
                         138.7E
                                           69
                                                 98
                                                       239
                                                               100
                                                                        0
                                                                             - 5
                                                                                   - 10
                                                                                           - 5
86092606 30
                                                295
                                                               95
86092612 31
                21.6N
                         138.7E
                                     8
                                          115
                                                       547
                                                                       5
                                                                             - 5
                                                                                   -20
                                                                                          -30
86092618 32
                21.9N
                         138.9E
                                                257
                                                               95
                                                                       5
                                                                            -10
                                     6
                                          90
                                                       451
                                                                                   -20
                                                                                          -35
86092700 33
                22.2N
                         139.2E
                                    11
                                          93
                                                300
                                                               95
                                                                       0
                                                                            - 10
                                                                                   - 20
                         139 4F
                                                                      - 5
                                                                            -15
86092706 34
                22 6N
                                   13
                                          54
                                                280
                                                               95
                                                                                   -20
                                                                      - 5
86092712 35
                23.2N
                         139.8E
                                   16
                                          128
                                                371
                                                               90
                                                                            -20
                                                                                   -15
86092718 36
                23.9N
                         140.2E
                                   13
                                          163
                                                346
                                                               90
                                                                      - 5
                                                                            -15
                                                                                   -15
86092800 37
                24.8N
                         140.7E
                                                                       0
                                                                            -15
                                                                                   - 10
                                    13
                                          62
                                                138
                                                               85
86092806 38
                26.1N
                         141.4E
                                    12
                                          115
                                                214
                                                               85
                                                                       - 5
                                                                            -10
                27.4N
                         142.1E
                                          163
                                                               85
                                                                       0
                                                                            -10
86092812 39
                                   13
86092818 40
                29.0N
                         142.7E
                                                               80
                                                                       0
                                                                            -15
                                   13
                                          95
                30 8N
                         143.5E
                                   24
                                                               75
86092900 41
                                          60
                                                                       0
                                                                             - 5
86092906 42
                32 7N
                         144 RF
                                   16
                                           41
                                                               70
                                                                       0
86092912 43
                34.5N
                         146.6E
                                   24
                                                               65
                                                                       5
83092918 44
                36.0N
                         148.7E
                                    49
                                                               65
                                                                        0
86093000 45
                37.4N
                         151.1E
                                   20
                                                               55
86093006 46
                38.9N
                         154.1E
               AVERAGE
                                   22
                                         112
                                                204
                                                       261
            # OF CASES
                                   46
                                           42
                                                  38
                                                         32
Typhoon Carmen (15W)
   OTG
           W
                BT Lat BT Lon Pos Er 24 Er 48 Er 72 Er BT Wn WW Er 24 WE 48 WE 72 WE
86100200
                10.9N
                         152.9E
                                   85
                                          139
                                                 173
                                                       254
                                                               35
                                                                      - 5
                                                                              0
                                                                                            5
            1
                                                                      ٠5
                                                                                     5
                                                                                            5
86100206
            2
                11.4N
                         151.3E
                                   49
                                          126
                                                208
                                                       264
                                                                40
                                                                             10
                                                                                            5
                                   31
                                                                       5
                                                                                    15
                12.0N
                                                 145
                                                        193
                                                                40
                                                                             15
86100212
            3
                         150.7E
                                          102
                                                               45
86100218
            4
                12.7N
                         149.5E
                                    42
                                           99
                                                 109
                                                        125
                                                                      - 5
                                                                             15
                                                                                    10
```

٠.

```
86100300
             5
                 13.3N
                          148.2E
                                      8
                                                   29
                                                          21
                                                                 45
                                                                         5
                                                                               15
                                                                                      15
                                                                                             20
 86100306
              6
                  13.8N
                          146.8E
                                      6
                                            21
                                                   48
                                                          45
                                                                 45
                                                                        10
                                                                               15
                                                                                      10
                                                                                             25
                  14.3N
                          145.5E
                                                   54
                                                          81
                                                                 50
                                                                         10
                                                                               20
                                                                                       5
                                                                                             25
 86100312
                                      8
                                            13
                                                   83
                                                                 55
                                                                                       0
                                                                                             25
 86100318
             8
                  14.8N
                          144.2E
                                      8
                                            19
                                                          63
                                                                                10
                  15.5N
                          143.2E
                                                  115
                                                          47
                                                                                       10
                                                                                             35
 86100400
             9
                                      6
                                            48
                                                                 60
                 16.1N
                          142.3E
                                           102
                                                          43
                                                                 65
                                                                         0
                                                                               . 5
                                                                                       5
                                                                                             25
 86100406
            10
                                     18
                                                  146
                 16.7N
                          141 7F
                                                   71
                                                         152
                                                                                      15
                                                                                             25
 86100412
            11
                                      6
                                            72
                                                                 65
                                                                         5
                                                                               - 5
 86100418
            12
                 17.3N
                          140.9E
                                     13
                                            70
                                                   34
                                                         266
                                                                 75
                                                                         0
                                                                               - 5
                                                                                      20
                                                                                             20
 86100500
            13
                  17.9N
                          140.2E
                                      6
                                            51
                                                   16
                                                         300
                                                                 85
                                                                        - 10
                                                                                5
                                                                                      10
                                                                                             - 5
 86100506
                  18.6N
                          139.5E
                                            37
                                                   55
                                                         324
                                                                 90
                                                                        ٠5
                                                                               10
            15
                  19.2N
                          138.8E
                                      0
                                                  165
                                                                 95
                                                                        - 5
                                                                               15
                                                                                       0
 86100512
                                             6
                 19.7N
                          138.3E
                                            41
                                                  294
                                                                100
                                                                        . 5
                                                                               15
                                                                                       0
 86100518
            16
                                      8
                 20 4N
                          138 0F
                                            85
                                                  315
                                                                 95
                                                                         0
                                                                                5
                                                                                     - 10
 86100600
            17
                                      6
 86100606
            18
                 21.3N
                          137.8E
                                     25
                                           129
                                                  361
                                                                 90
                                                                         5
                                                                                ٥
                                                                                     - 10
 86100612 19
                 22.4N
                          137.8E
                                      8
                                            21
                                                  246
                                                                 85
                                                                         5
                                                                              - 15
                                                                                     - 15
                 23.5N
                          138.0E
                                     16
                                            74
                                                                 85
                                                                         0
                                                                              -20
 86100618 20
 86100700 21
                  24.5N
                          138.5E
                                      6
                                           192
                                                                 80
                                                                              -20
                 26.5N
                          139.5E
                                     18
                                                                 80
                                                                         0
                                                                              -20
 86100706 22
                                           171
 86100712 23
                 28.7N
                          140 8F
                                     12
                                           308
                                                                 80
                                                                         0
                                                                              - 15
                          142.0E
                                      0
                                                                 80
                                                                       - 10
 86100718 24
                 31.0N
 86100800 25
                 33.3N
                          143.2E
                                     12
                                                                 80
                                                                        - 5
 86100806 26
                 35.4N
                          144.8E
                                      0
                                                                 70
                                                                        - 5
                 37.4N
                                                                 60
                                                                         0
 86100812 27
                          146.8E
                                     15
                                                  140
                                                         173
                AVERAGE
                                     15
                                            84
             # OF CASES
                                                          15
                                     27
                                            23
                                                   19
Tropical Storm Dom (16W)
   DTG
           W#
                 BT Lat BT Lon
                                Pos Er 24 Er 48 Er 72 Er BT Wn WW er 24 WE 48 WE 72 WE
86100900
                 15.4N
                         114.9E
                                      6
                                            25
                                                   12
                                                          29
                                                                  40
                                                                          5
                                                                                25
                                                                                       30
                                                                                              25
86100906
                 16.0N
                         114.0E
                                     12
                                            24
                                                   34
                                                                  40
             2
                                                                         10
                                                                                30
                                                                                       15
86100912
             3
                 16.3N
                         113.3F
                                     27
                                            32
                                                   50
                                                                  45
                                                                          ٥
                                                                                 5
                                                                                        5
86100918
             4
                 16.6N
                         112.6E
                                     79
                                           137
                                                  144
                                                                  45
                                                                         - 5
                                                                                - 5
                                                                                      -10
86101000
                 16.8N
                         111.7E
                                     76
                                           104
                                                                  40
                                                                          0
                                                                                - 5
86101006
             6
                 17.0N
                         110.9E
                                     42
                                            42
                                                                  40
                                                                          5
                                                                                 ٥
86101012
                 17.1N
                         110 1F
                                     12
                                            17
                                                                 35
                                                                          5
                                                                                 5
                 17 2N
86101018
             8
                         109.3E
                                      6
                                           160
                                                                  35
                                                                          0
86101100
             9
                 17.3N
                         108.5E
                                      6
                                            54
                                                                 35
                                                                          0
            10
                 17.3N
                         107.7E
86101106
                                                                  35
                                                                          0
86101112 11
                 17.4N
                          106.9E
                                      0
                                                                  30
               AVERAGE
                                     25
                                            66
                                                   60
                                                          29
             # OF CASES
                                     11
                                             9
                                                    4
                                                            1
Typhoon Eilen (17W)
                  BT Lat BT Lon Pos Er 24 Er 48 Er 72 Er BT Wn WW ER 24 WE 48 WE 72 WE
   DTG
           W#
86101100
                 10.8N
                          126.6E
                                           132
                                                  185
                                                         217
                                                                                             - 10
                                                                  45
86101106
                 11.2N
                          125.1E
                                                         213
                                                                  45
                                                                          5
             2
                                     22
                                           119
                                                  139
                                                                                 5
                                                                                      -10
                                                                                             -10
86101112
             3
                 11.6N
                          123.7E
                                     13
                                            49
                                                   80
                                                         144
                                                                  45
                                                                          0
                                                                                 0
                                                                                        0
                                                                                              - 5
86101118
                 12.0N
                         122.3E
                                     19
                                            42
                                                  121
                                                         194
                                                                  40
                                                                                              - 5
                                                                          0
                                                                                 ٥
                                                                                       - 5
             5
                 12.6N
86101200
                          121.1E
                                     23
                                            48
                                                  125
                                                         166
                                                                  40
                                                                          0
                                                                                 ٥
                                                                                       - 5
                                                                                               5
86101206
             6
                 13.2N
                          120.0E
                                     17
                                            73
                                                  182
                                                         228
                                                                  40
                                                                          5
                                                                                 0
                                                                                        ٥
                                                                                              10
86101212
                 13.9N
                          119.3E
                                     32
                                           158
                                                  225
                                                         302
                                                                  45
                                                                         5
                                                                                              15
86101218
                 14.5N
                          118.7E
                                     60
                                           199
                                                  264
                                                         320
                                                                  50
                                                                         - 5
                                                                                 5
                                                                                              10
                 15.1N
                          118.2E
86101300
                                                         170
                                                                  55
                                                                                       15
             9
                                      8
                                            84
                                                  118
                                                                         - 5
                                                                                 0
                                                                                              10
                 15 5N
                          118 OF
                                            95
86101306
            10
                                     19
                                                  124
                                                         161
                                                                  60
                                                                          ٥
                                                                                 5
                                                                                       15
                                                                                              10
86101312
            11
                 15.9N
                          118.QE
                                     13
                                            29
                                                   61
                                                         140
                                                                  60
                                                                          0
                                                                                 0
                                                                                       20
                                                                                              15
86101318
                 16.4N
                          118.0E
                                                   59
                                                         185
                                      8
                                                                  65
                                                                          0
                                                                                 5
                                                                                       20
86101400
            13
                 16.9N
                          118.0E
                                      6
                                            49
                                                  108
                                                         299
                                                                  70
                                                                          0
                                                                                        5
                                                                                               5
                                                                                10
                          118.0E
86101406
                 17.4N
                                                         425
            14
                                      ۵
                                            83
                                                  202
                                                                  75
                                                                          ٥
                                                                                 5
                                                                                        5
                                                                                               ٥
                 17.8N
                          117.3E
86101412 15
                                     35
                                           107
                                                  272
                                                         516
                                                                  80
                                                                          0
                                                                                10
                                                                                        5
                                                                                               ٥
86101418
            16
                 17.9N
                          117.6E
                                     25
                                            95
                                                  287
                                                         520
                                                                  80
                                                                         - 5
                                                                                - 5
                                                                                      10
                                                                                              10
86101500
                          117.4E
                                                         253
            17
                 18.0N
                                      6
                                            18
                                                  130
                                                                  75
                                                                          0
                                                                               - 10
                                                                                       - 5
86101506
            18
                 18.3N
                          117.3E
                                      6
                                                  147
                                                         286
                                                                  75
                                                                          0
                                                                                       - 5
                                            36
                                                                                - 5
                                                                                              10
                 18.6N
                          117.2E
                                                  235
                                                                  70
                                                                                        0
86101512
            19
                                      6
                                            97
                                                         447
                                                                          0
                                                                                 0
                                                                                              10
                 18.8N
86101518
            20
                          117.1E
                                      6
                                            99
                                                  226
                                                         469
                                                                  70
                                                                         - 5
                                                                               -10
                                                                                       - 5
86101600
            21
                 19.0N
                          116.8E
                                     17
                                           120
                                                  225
                                                         466
                                                                  75
                                                                          0
                                                                                 0
                                                                                        5
                                                                                              10
                          116.5E
86101606 22
                 19.2N
                                      6
                                           101
                                                  237
                                                                 70
                                                                          5
                                                                                 0
                                                                                       10
                 19.4N
                          116.0E
                                            25
                                                                  65
                                                                                        5
86101612
            23
                                      ٥
                                                   25
                                                                          ٥
                                                                                - 5
                 19.7N
                          115.4E
86101618
                                      8
                                            40
                                                   22
                                                                 65
                                                                          0
                                                                                - 5
                                                                                       10
            24
                          114.9E
86101700 25
                 20.1N
                                      0
                                           109
                                                  187
                                                                  65
                                                                          O
                                                                                . 5
86101706
            26
                 20.4N
                          114.6E
                                      6
                                            52
                                                                  65
                                                                          0
                                                                                 0
86101712 27
                 20.7N
                          114.2E
                                     19
                                            34
                                                                  60
                                                                          0
86101718
                 20.9N
                          113.9E
                                      6
                                            41
                                                                  55
                                                                          0
            28
                          113 SF
86101800 29
                 21 1N
                                      0
                                           123
                                                                  50
                                                                          0
                                                                                10
86101806 30
                 21.1N
                          113.1E
                                      8
                                                                  45
                                                                          5
86101812 31
                 21.1N
                          112.6E
                                      0
                                                                  40
```

Proceeds of the contract of th

```
5
86101818 32 21.1N
                        112.0E
                                    6
                                                               35
                                                               30
                                                                       5
86101900 33
                20.1N
                        111.1E
                                   66
               AVETVCE
                                   14
                                          78
                                                159
                                                      291
            # OF CASES
                                   33
                                          29
                                                 25
                                                        21
Typhoon Forrest (18W)
               BT Lat BT Lon Pos Er 24 Er 48 Er 72 Er BT Wn WW ER 24 WE 48 WE 72 WE
   DTG
          W
                                   52
                                                               55
                                                                    - 25
                                                                           -35
                                                138
                                                        57
                        153.6F
                                         151
86101518
                15.6N
                                                                       5
                                                                           -15
                                                                                   10
                                                                                          25
                        151.9E
                                         91
                                                 34
                                                       141
                                                              60
86101600
                16.3N
                                    R
                                                                                          30
                                                                           .25
                                                                                   10
86101606
                16.9N
                        150.2E
                                   24
                                          79
                                                 38
                                                      164
                                                              65
                                                                       5
                                                                                   10
                                                                                          25
86101612
                17.5N
                        148.3E
                                    6
                                          80
                                                169
                                                      226
                                                              70
                                                                             ٥
                                                                                          30
                        146.8E
                                         135
                                                251
                                                      247
                                                              90
                                                                      . 5
                                                                            10
                                                                                   20
86101618
                18.2N
                                                223
                                                      657
                                                              100
                                                                      . 5
                                                                            25
                                                                                   25
                                                                                          35
                18.7N
                        145.3E
                                          67
86101700
                                                                     - 10
                                                                            20
                                                                                   25
                                                                                          40
                19.4N
                        144.3E
                                          64
                                                290
                                                      869
                                                             110
86101706
                                                              95
                                                                      0
                                                                            - 5
                                                                                    0
                                                                                          25
86101712
                20.1N
                        143.3E
                                    6
                                          84
                                                352
                                                     1060
            8
                20.6N
                        142 7F
                                                426
                                                              90
                                                                                  - 10
                                    A
                                          76
86101718
                                                                       0
                                                                           - 15
                                                                                  - 10
                                                557
                                                               90
                        142.2F
                                          83
86101800 10
                21.2N
                                                                                    0
                                                                           -15
86101806 11
                21.7N
                        142 2F
                                    8
                                         135
                                                738
                                                               90
                                                                      . 5
                                                                                   15
                                                                     - 5
                                                                           -10
86101812 12
                                                               90
                22.2N
                        142.3E
                                    6
                                         198
                                                927
86101818 13
                22.7N
                         142.5E
                                   17
                                         356
                                                               90
                                                                      - 5
                                                                            - 5
                        143.3E
                                         444
                                                               85
                                                                      - 5
                                                                             o
86101900 14
                23.5N
                                         512
                                                               80
                                                                       0
                                                                             0
                24.4N
                        144.7E
                                    8
86101906 15
                                                               75
                                                                       0
                25.8N
                        146.7E
                                   37
                                         580
86101912 16
                                                               70
                                                                     - 10
                27 8N
                        149.3E
                                   40
86101918 17
                        152 9F
                                   62
                                                               65
                                                                    -10
86102000 18
                31.1N
                                                               55
86102006 19
                34.3N
                         156.7E
                                   16
               AVETAGE
                                   18
                                         196
                                                345
                                                       427
            # OF CASES
                                   19
                                          16
                                                 12
                                                         8
Tropical Storm Georgia (19W)
                BT Lat BT Lon Pos Er 24 Er 48 Er 72 Er BT Wn WW ER 24 WE 48 WE 72 WE
   DTG
          W#
 86101806
                 11.5N
                         127.3E
                                    6
                                         106
                                                264
                                                       388
                                                               45
                                                                             10
                                                                                          · 5
 86101812
                                                               50
                                                                      . 5
                                                                             - 5
                                                                                  - 15
                 12.0N
                         126.2E
                                    6
                                         111
                                                227
                                                       381
                                                                                          - 5
                                                                            - 10
                                                                                  . 15
                 12.3N
                         125.2E
                                    19
                                         175
                                                297
                                                       442
                                                               55
                                                                     - 10
 86101818
             3
                                                                                          30
                         124.2E
                                         158
                                                288
                                                       491
                                                               50
                                                                       n
                                                                           -10
                                                                                   10
                 12.5N
 86101900
                                                296
                                                       454
                                                               40
                                                                       0
                                                                            - 5
                                                                                    5
                                                                                          45
 86101906
                 12.8N
                         123.0E
                                    6
                                         113
                                                                              5
                                                                                          40
                         121.0E
                                    12
                                          89
                                                271
                                                       410
 86101912
                 13.1N
                                                               40
                                                                             10
                                                                                    15
                                                                                          25
                                         102
                                                387
                                                       433
                 13.2N
                         119 4E
                                   26
 86101918
                                                                             10
                                                                                   25
                                                 72
                                                       214
                                                               45
 86102000
             8
                 13.4N
                         118.1E
                                   19
                                          18
                                                                                   35
                                                               45
 86102006
                 13.7N
                         117.1E
                                    ٥
                                          47
                                                 71
 86102012 10
                 14.0N
                         115.9E
                                    0
                                          87
                                                155
                                                               45
                                                                       0
                                                                                   40
                         114.6E
                                                174
                                                               45
                                                                                   45
                 14.1N
                                         104
 86102018 11
                                    6
                                          50
                                                               45
                                                                       0
                                                                             15
                                                                                   30
                         113.2E
                                                207
 86102100 12
                 14.3N
                                                               50
                                                                             25
                 14 5N
                         111.4E
                                          59
 86102106 13
                                    6
                                                                             20
                                                               50
                14.9N
                         110.0E
                                    6
                                          64
 86102112 14
                                                               50
 86102118 15
                15.2N
                         108.8E
                                    6
               AVERAGE
                                    10
                                          92
                                                226
                                                       402
             # OF CASES
                                    15
                                          14
                                                 12
                                                         8
Tropical Storm Herbert (20W)
                 BT Lat BT Lon Pos Er 24 Er 48 Er 72 Er BT Wn WW ER 24 WE 48 WE 72 WE
    DIG
           W#
                                                 26
                                                       101
                                                               35
                                    13
                                          48
 86110800
                 13.1N
                         119.9E
                                                                      - 5
                                                                            - 10
                                                                                          15
                                                               40
 86110806
                 13.4N
                         119.0E
                                    12
                                          46
                                                 63
                                                       158
                                                                                          25
                                                               45
                                                                     - 10
                                                                             - 5
                                                                                    15
 86110812
                                         155
                                                225
                                                       299
                 13.9N
                         118.2E
                                    35
                                                                             - 5
                                                                                    20
                                                                                           30
                                                               50
                                                                     - 10
 86110818
                 14.2N
                         117.6E
                                    42
                                         180
                                                209
                                                       311
                                                                       0
                                                                             10
                                                                                    15
                 14.2N
                         116.9E
                                    8
                                         135
                                                 192
                                                               55
 86110900
                                    38
                                         106
                                                182
                                                               60
                                                                       O
                                                                              5
                                                                                    20
 86110906
             6
                 14.0N
                         116.2E
                                          72
                                                               60
                                                                      - 5
                                                                             10
                                                                                    30
 86110912
                 13.8N
                         115.5E
                                    24
                                    18
                                           44
                                                               60
                                                                             15
                                                                                    30
                 13.7N
                         114.8E
 86110918
             8
                                          25
                                                               55
                                                                             20
                         114 OF
                                    13
 86111000
             9
                 13.6N
                                                               55
                                    0
                                          37
 86111006 10
                 13.6N
                         113.1E
                                                                       0
                                                               50
 86111012
                 13.6N
                         112.2E
                                    13
                                         126
                                                                      - 5
                 13.7N
                         111.7E
                                   107
                                                               45
 86111018
            12
                                                                      - 5
                                                               45
                 13.8N
                         111.2E
                                    59
 86111100
            13
                                                                       0
                                                               40
                 13.9N
                         110.6E
                                    13
            14
 86111106
                                                               35
                                                                       0
                 14.2N
                         110.1E
                                    13
 86111112 15
                 14.4N
                         109.4E
                                     6
 86111118 16
                AVERAGE
                                    26
                                           89
                                                 130
                                                       217
                                                   R
             # OF CASES
                                    16
                                           11
```

```
Tropical Storm Ida (21W)
                 BT Lat BT Lon Pos Er 24 Er 48 Er 72 Er BT Wn WW ER 24 WE 48 WE 72 WE
    DTG
           W#
 86111018
                  6.0N
                         133.5E
                                   78
                                           99
                                                 77
                                                       166
 86111100
             2
                  6.4N
                         132.6E
                                    67
                                           32
                                                128
                                                       263
                                                               30
                                                                             15
                                                                                    10
                                                                                           5
 86111106
             3
                  6.8N
                         131.6E
                                    37
                                           60
                                                201
                                                       259
                                                               25
                                                                      10
                                                                             10
                                                                                    15
                                                                                            ٥
 86111112
                  7.4N
                         130.5E
                                    18
                                          72
                                                237
                                                       322
                                                               30
                                                                              5
                                                                                    15
                                                                                            5
 86111118
                  8.0N
                         129.4E
                                          102
                                                232
                                                       373
                                     6
                                                               35
                                                                                    10
                                                                                           15
 86111200
             6
                  8.6N
                         128.2E
                                                165
                                     8
                                          88
                                                       341
                                                               40
                                                                              0
                                                                                    10
                                                                                            5
 86111206
                  9.2N
                         127 1F
                                         118
                                                       384
                                    30
                                                186
                                                               45
                                                                                           10
 86111212
             R
                  9.9N
                         126.1E
                                     6
                                         157
                                                244
                                                       366
                                                               45
                                                                             10
                                                                                          20
 86111218
             9
                 10 7N
                         124.9E
                                    17
                                         155
                                                246
                                                       373
                                                               40
                                                                                          30
 86111300
            10
                 11.8N
                         123.7E
                                    48
                                         127
                                                223
                                                       331
                                                               35
                                                                              0
                                                                                     0
                                                                                          40
 86111306
                 12.8N
                         122.2E
                                    32
                                          18
                                                120
                                                               30
                                                                                    10
 86111312
            12
                 13.4N
                         120.6E
                                     6
                                          87
                                                278
                                                               30
                                                                                   20
 86111318
           13
                 13.8N
                         119.2E
                                   21
                                         107
                                                385
                                                               35
                                                                       5
                                                                             15
                                                                                    30
 86111400 14
                 14.0N
                         118.0E
                                     6
                                         134
                                                379
                                                               40
                                                                              0
                                                                                   35
 86111406 15
                 14.7N
                         116.8E
                                    13
                                         173
                                                436
                                                               45
                                                                       0
                                                                             10
                                                                                    45
 86111412 16
                 15.7N
                         115.9E
                                   32
                                         230
                                                               45
                                                                             15
 86111418
           17
                 16.7N
                         115.1E
                                   66
                                         248
                                                               40
                                                                      10
                                                                             15
 86111500 18
                 17.8N
                         114.2E
                                   13
                                         288
                                                               55
                                                                       0
                                                                             20
 86111506
           19
                 18.5N
                         113.9E
                                   11
                                         346
                                                               50
                                                                       5
                                                                             15
 86111512 20
                 19.5N
                         114.2E
                                   68
                                                               45
                                                                       0
 86111518 21
                20.2N
                         115.0E
                                                               35
                                  102
                                                                       5
 86111600 22
                20.0N
                         116.0E
                                   23
                                                               30
                                                                      10
               AVERAGE
                                   32
                                         139
                                                236
                                                       325
            # OF CASES
                                   22
                                          19
                                                 15
                                                        11
Typhoon Joe (22W)
   DTG
          W#
                BT Lat BT Lon Pos Er 24 Er 48 Er 72 Er BT Wn WW ER 24 WE 48 WE 72 WE
86111818
                13.6N
                                          67
                         128.0E
                                                 56
                                   12
                                                       177
                                                               40
                                                                     - 10
86111900
                13 7N
                         127.1E
                                   12
                                          59
                                                242
                                                       508
                                                               45
                                                                      - 5
 86111906
            3
                13.8N
                         126.1E
                                   13
                                         109
                                                307
                                                       579
                                                               50
                                                                       0
86111912
                14.3N
                         125.4E
                                    8
                                         134
                                                291
                                                       424
                                                               55
                                                                       0
86111918
                14.8N
                         124.8E
                                   21
                                         184
                                                351
                                                       453
                                                               60
                                                                       0
86112000
            6
                15.4N
                         124.4E
                                    6
                                          80
                                                107
                                                        95
                                                               65
                                                                       ٥
86112006
                16.1N
                        124.2E
                                                       271
                                                 25
                                   19
                                          59
                                                               60
                                                                      10
86112012
                16.7N
                         124.1F
                                    8
                                                474
                                                       940
                                                               75
                                         137
                                                                      0
86112018
                17.4N
                        123.9E
                                   18
                                         137
                                                476
                                                               80
                                                                      0
86112100
           10
                18.1N
                        123.9E
                                    6
                                         132
                                                545
                                                               90
                                                                           -25
                                                                                  -30
86112106
           11
                18.9N
                        123.9E
                                    6
                                         177
                                                623
                                                              100
                                                                      0
                                                                           -25
86112112
           12
                19.6N
                        123.9E
                                         200
                                                668
                                                              100
86112118
                20.2N
                        124.0E
                                                751
           13
                                         203
                                                              100
                                                                       0
86112200 14
                20.7N
                        124.1E
                                         177
                                                737
                                                               90
                                                                                  - 25
                                                                       0
                                                                            - 5
86112206
           15
                21.2N
                        124.2E
                                   18
                                               1025
                                                               85
                                         440
                                                                      ٥
                                                                           - 10
                                                                                  - 10
86112212 16
                        124.4E
                21.6N
                                    6
                                         221
                                               773
                                                               75
                                                                      0
                                                                            - 5
                                                                                   - 5
86112218
           17
                22.1N
                        124.6E
                                                824
                                    .
                                         244
                                                               70
                                                                      0
                                                                            . 5
                                                                                    ٥
86112300 18
                22 5N
                        124.9E
                                   13
                                         281
                                                866
                                                               70
                                                                      0
                                                                           - 10
86112306 19
                22.9N
                        125.1E
                                   24
                                         222
                                                               65
                                                                            15
86112312 20
                23.3N
                        125.5E
                                   13
                                         122
                                                               60
                                                                             5
                                                                     - 5
86112318
                23.7N
                        125.9E
                                         197
                                                               55
                                                                      - 5
                                                                            10
86112400 22
                24.0N
                        126.3E
                                   18
                                                               55
                                                                      0
                                         129
86112406 23
                24.3N
                        128.8E
                                                               40
                24.5N
                        127.3E
86112412 24
                                   30
              AVERAGE
                                   12
                                         169
                                                508
                                                      431
            # OF CASES
                                   24
                                          22
                                                 18
                                                         8
Super Typhoon Kim (23W)
                BT Lat BT Lon Pos Er 24 Er 48 Er 72 Er BT Wn WW ER 24 WE 48 WE 72 WE
86112806
                 7.9N
                        162 9F
                                                148
                                                      274
                                   19
                                          60
                                                               40
                                                                    - 10
                                                                           -10
                                                                                   - 5
86112812
            2
                 8 4N
                        161.8E
                                    6
                                          47
                                                182
                                                      378
                                                               45
                                                                     ٠5
                                                                            - 5
                                                                                    5
86112818
            3
                 8.8N
                        160.6E
                                          92
                                               234
                                                       423
                                                               50
                                                                     - 5
                                                                            - 5
                                    6
86112900
                 9.1N
                        159.4E
                                               246
                                                       423
                                          40
                                                                            10
                                                                                   25
                                                                                          10
86112906
                 9.3N
                        158.4E
                                          69
                                               249
                                                      393
                                                               65
                                                                            10
                                                                                   15
                                                                                           5
                        157.5E
86112912
                                   18
                                         109
                                                301
                                                       475
                                                               70
                                                                     10
                                                                            20
86112918
                 9.7N
                        156.8E
                                         153
                                                318
                                                      436
                                                               75
                                   43
                                                                     10
                                                                            20
                                                                                          - 5
86113000
                10.1N
                        155 OF
                                   35
                                                293
                                                      374
                                         148
                                                               80
                                                                      5
                                                                            25
                                                                                    0
                                                                                          - 5
                10.7N
86113006
            9
                        155.2E
                                   21
                                         162
                                               249
                                                      322
                                                               80
                                                                     10
                                                                            20
                                                                                    0
86113012 10
                11.4N
                        154.3E
                                   19
                                         142
                                               214
                                                      258
                                                               80
                                                                     10
                                                                             0
86113018 11
                12.1N
                        153.6E
                                         153
                                                199
                                                      252
                                                               85
                                                                     10
                                                                                   - 5
                                                                                          5
86120100 12
                13.1N
                        152.8E
                                    6
                                          48
                                               210
                                                       403
                                                              85
                                                                      0
                                                                           -35
                                                                                  -60
                                                                                         - 50
86120106 13
                14.0N
                        152.2E
                                         108
                                               287
                                                      475
                                                              95
                                                                      - 5
                                                                           -35
                                                                                  - 50
                                                                                         -45
86120112 14
                14.7N
                        151.4E
                                               305
                                                      414
                                        145
                                                             110
                                                                     10
                                                                           -25
                                                                                  - 35
                                                                                        -45
86120118 15
                15.2N
                                               378
                        150.6E
                                   17
                                        170
                                                      502
                                                             115
                                                                     . 5
                                                                           -25
                                                                                  -20
                                                                                        -25
86120200 16
                15.6N
                        149.8E
                                   13
                                        136
                                               323
                                                      394
                                                             120
                                                                     - 5
                                                                           - 10
                                                                                    0
                                                                                          0
86120206 17
                15.6N
                        149.0E
                                  21
                                        141
                                               287
                                                      374
                                                             125
```

```
86120212 18
                 15.5N
                         148.2E
                                    12
                                          133
                                                 264
                                                        420
                                                               130
                                                                               - 5
                                                                                     - 10
                                                                                             10
86120218
                                                                                             25
10
                 15.5N
                         147.4E
                                    12
                                                  70
                                                        213
                                                               135
                                                                               10
                 15.5N
                         146.5E
                                           72
                                                 100
                                                         141
86120300 20
86120306
                 15.5N
                         145.4E
                                     0
                                           44
                                                 185
                                                        207
                                                                                0
                                                                                             . 5
                                                               130
                 15.5N
                         144.2E
                                           84
86120312 22
                                     0
                                                 140
                                                        204
                                                               125
                                                                         0
                                                                              - 15
                                                                                            · 10
                                                                                           - 15
                         143.0E
                                           63
86120318 23
                 15.7N
                                     0
                                                 115
                                                        255
                                                               120
                                                                         0
                                                                              - 15
                                                                                       5
                         141 9E
86120400
           24
                 15 9N
                                     R
                                          124
                                                 221
                                                        393
                                                               120
                                                                         0
                                                                              - 5
                                                                                      10
                                                                                           .25
86120406 25
                 16.5N
                         141.1E
                                     8
                                          108
                                                 217
                                                        414
                                                               120
                                                                         0
                                                                               5
                                                                                       5
                                                                                           -20
86120412 26
                 17.4N
                         140.8E
                                    42
                                           61
                                                 299
                                                        703
                                                               120
                                                                         ٥
                                                                              20
                                                                                            -30
86120418
           27
                         140.4E
                                           99
                                                        788
                                                                                    -10
                 17.6N
                                    31
                                                 368
                                                               115
                                                                              15
                                                                                           -25
86120500 28
                 17.5N
                         140.1E
                                    25
                                          193
                                                 640
                                                       1182
                                                               110
                                                                        5
                                                                               5
                                                                                    - 35
                                                                                           -20
                         139.9E
86120506 29
                 17.5N
                                    11
                                          248
                                                 719
                                                       1218
                                                               100
                                                                         ٥
                                                                               0
                                                                                    - 30
                                                                                           - 15
86120512 30
                 17.5N
                         139.6E
                                    25
                                          286
                                                 700
                                                       1260
                                                                         0
                                                                90
                                                                             - 10
                                                                                    - 30
                                                                                           - 15
86120518 31
                 17.4N
                         138.9E
                                    27
                                          248
                                                 642
                                                       1162
                                                                85
                                                                         ٥
                                                                             -20
                                                                                    -25
                                                                                           -20
86120600 32
                 17.2N
                         138.1E
                                    12
                                          115
                                                  70
                                                                80
                                                                       - 5
                                                                             - 45
86120606 33
                 17.2N
                         137.1E
                                    34
                                          130
                                                 322
                                                                85
                                                                      -15
                                                                             -45
                 17.1N
                         136.1E
                                           97
                                                 388
                                                                                    . 35
86120612 34
                                                                90
                                                                      -15
                                                                             -45
86120618 35
                 17.2N
                         135.1E
                                     8
                                           76
                                                 341
                                                                95
                                                                      - 15
                                                                             .25
                                                                                    -30
86120700 36
                 17.3N
                         134.2E
                                           89
                                                 263
                                                                                    -25
                                    12
                                                               100
                                                                      - 10
                                                                             -15
86120706 37
                 17 3N
                         133.4E
                                    12
                                          107
                                                 233
                                                                95
                                                                      - 10
                                                                             - 10
                                                                                    .20
                         132 9E
                                          174
86120712 38
                 17.2N
                                    12
                                                 305
                                                                90
                                                                      -10
                                                                             - 10
                                                                                    .20
86120718 39
                 16.9N
                         132 7E
                                    32
                                          166
                                                 303
                                                                80
                                                                        ۵
                                                                             - 10
                                                                                    - 15
86120800 40
                 16.6N
                         132.6E
                                    18
                                           81
                                                 160
                                                                75
                                                                       - 5
                                                                             -10
                                                                                    -15
86120806 41
                 16.2N
                         132.5E
                                     6
                                           91
                                                 235
                                                                70
                                                                       . 5
                                                                             -10
                                                                                    - 10
86120812 42
                         132.4E
                                          109
                                                 235
                 15.9N
                                     6
                                                                65
                                                                       - 5
                                                                             -15
                                                                                      - 5
86120818 43
                 15.9N
                         132.6E
                                    24
                                          115
                                                 254
                                                                65
                                                                        . 5
                                                                             - 15
                                                                                      - 5
86120900 44
                         132.6E
                                     0
                                           80
                                                 282
                                                                        0
                                                                                       5
                 16.1N
                                                                60
                                                                               0
86120906 45
                 16 1N
                         132 3F
                                          102
                                                 252
                                                                        5
                                    12
                                                                55
                                                                               5
                                                                                       5
86120912 46
                 16.2N
                         132.1F
                                     6
                                           54
                                                 199
                                                                55
                                                                        0
                                                                               0
                                                                                      10
86120918 47
                 16.3N
                         132 0F
                                    13
                                          109
                                                 233
                                                                50
                                                                         5
                                                                               5
                                                                                      10
86121000 48
                 16.3N
                         131.9E
                                     6
                                           83
                                                 219
                                                                 50
                                                                              10
                                                                                      10
86121006 49
                 16.5N
                         131.8E
                                    17
                                          118
                                                 285
                                                                 45
                                                                              10
                                                                                      10
86121012 50
                 16.7N
                         131.6E
                                     8
                                          135
                                                 295
                                                                 40
                                                                         5
                                                                              10
                                                                                       5
86121018 51
                 17.3N
                         131.3E
                                    30
                                          121
                                                 288
                                                                 35
                                                                                5
86121100 52
                 17.8N
                         131.1E
                                    12
               AVERAGE
                                    15
                                          116
                                                 280
                                                        488
             # OF CASES
                                    52
                                           51
                                                  51
                                                         31
Tropical Storm Lex (24W)
                 BT Lat BT Lon Pos Er 24 Er 48 Er 72 Er BT Wn WW ER 24 WE 48 WE 72 WE
   DTG
           W#
                         163 0E
                                    25
                                          106
                                                                              - 5
                                                                                      40
                                                                                             65
86120318
                  8 1N
                                                 150
                                                        199
                                                                30
                                                                         a
86120400
                  8.1N
                         162.1E
                                    48
                                          133
                                                 119
                                                        251
                                                                35
                                                                         0
                                                                              20
                                                                                      45
                                                                                             60
86120406
                  8.3N
                         161.3E
                                    18
                                           90
                                                 133
                                                        509
                                                                 40
                                                                         0
                                                                              30
                                                                                      45
                                                                                             60
                                          108
                                                                                             70
86120412
                  8.7N
                         160.5E
                                    35
                                                 124
                                                        451
                                                                 40
                                                                              35
                                                                                      55
                  9.4N
                         159.6E
                                    32
                                           30
                                                        496
                                                                 35
                                                                        10
                                                                              30
                                                                                      50
                                                                                            65
86120418
                                                 166
                                                                                      45
                                                                                            65
                  9.8N
                         158.7E
                                    13
                                           40
                                                 199
                                                        465
                                                                        10
                                                                              30
86120500
                                                                 35
             6
                                                                                     30
                                                                                             40
86120506
             7
                 10.2N
                         157.5E
                                     8
                                           42
                                                 432
                                                        543
                                                                30
                                                                       10
                                                                              20
86120512
             8
                 10.6N
                         156.4E
                                    95
                                                                 30
                                                                        - 5
               AVERAGE
                                    34
                                           78
                                                 189
                                                        416
             # OF CASES
                                     8
Typhoon Marge (25W)
                        RT Lon Pos Er 24 Er 48 Er 72 Er BT Wn WW ER 24 WE 48 WE 72 WE
          W#
                 BT Lat
   DTG
                                                                                            20
86121406
                  7.3N
                         160.0E
                                    48
                                          156
                                                 215
                                                        119
                                                                30
                                                                              15
86121412
                  7.0N
                         158.6E
                                     0
                                          125
                                                 163
                                                        136
                                                                30
                                                                         0
                                                                              10
                                                                                       5
                                                                                            40
                                                                         0
                                                                              - 5
                                                                                    - 15
                                                                                             5
86121418
                  7.2N
                         157.3E
                                    36
                                          112
                                                 152
                                                        101
                                                                30
             3
86121500
                  7.3N
                         155.9E
                                   185
                                          346
                                                 427
                                                        337
                                                                30
                                                                         0
                                                                               0
                                                                                    - 15
                                                                                             0
86121506
                  7.7N
                         154.6E
                                   223
                                          404
                                                 449
                                                        379
                                                                35
                                                                         0
                                                                             - 15
                                                                                    -20
                                                                                             0
86121512
                  8.2N
                         153.3E
                                    42
                                           90
                                                 112
                                                        102
                                                                 40
                                                                         ٥
                                                                             -25
                                                                                    -20
                                                                                             0
86121518
                  8.5N
                         152.0E
                                    64
                                          110
                                                 161
                                                        131
                                                                             - 15
                                                                                              5
             8
                  8.9N
                         150.7E
                                    13
                                           24
                                                 165
                                                        207
                                                                 50
                                                                         0
                                                                             -10
                                                                                             10
86121600
                         149.5E
                                    42
                                          173
                                                                                      15
                                                                                             10
                  9.3N
                                                 303
                                                        303
                                                                55
                                                                         0
                                                                               5
86121606
             9
                  9 7N
                         148 4F
                                    21
                                          140
                                                        249
                                                                65
                                                                        ٥
                                                                               5
                                                                                      15
                                                                                             10
86121612
           10
                                                 243
86121618
           11
                10.2 N
                         147 2F
                                    24
                                          155
                                                 214
                                                        159
                                                                 70
                                                                         0
                                                                               5
                                                                                     15
                                                                                             0
86121700 12
                10.4 N
                         146 2F
                                    12
                                           89
                                                 104
                                                         64
                                                                75
                                                                        ٥
                                                                               5
                                                                                      15
                                                                                             0
86121706
                10.5 N
                         145.3E
                                    12
                                           67
                                                  95
                                                         90
                                                                 70
                                                                         0
                                                                              10
                                                                                     15
                                                                                             5
           13
86121712 14
                 10.6N
                         144.7E
                                    24
                                           60
                                                  53
                                                        192
                                                                70
                                                                         0
                                                                              10
                                                                                      10
                                                                                             10
                                                        297
                                                                 70
                                                                                             0
86121718 15
                 10.8N
                         144.0E
                                    19
                                           96
                                                 122
                                                                         0
                                                                               10
                                                                                       0
86121800 16
                 10.6N
                         143.2E
                                     0
                                           59
                                                 162
                                                        453
                                                                70
                                                                         0
                                                                                             0
                         142.0E
                                                                 70
                                                                         0
                                                                               5
                                                                                     10
                 10.5N
                                    17
                                           50
                                                 210
                                                        462
                                                                                             10
86121806 17
                         140 9F
                                    12
                                                                                            15
86121812 18
                 10.5N
                                           49
                                                 233
                                                        449
                                                                70
                                                                        O
                                                                               0
                                                                                      . 5
                                                        453
86121818 19
                 10.5N
                         140.0E
                                    17
                                           72
                                                 304
                                                                70
                                                                        0
                                                                             - 10
                                                                                      - 5
                                                                                            25
86121900 20
                 10 8N
                         139.2E
                                     8
                                           55
                                                 337
                                                        427
                                                                70
                                                                        0
                                                                             - 10
                                                                                      . 5
                                                                                            35
86121906 21
                 11 1N
                         138.0E
                                     6
                                          104
                                                 352
                                                        431
                                                                 75
                                                                              - 15
                                                                                       5
                                                                                            45
86121912 22
                 11 6N
                         136.8E
                                    13
                                          193
                                                 396
                                                        485
                                                                 80
                                                                        5
                                                                              10
                                                                                      10
                                                                                            45
86121918 23
                 12.0N
                         135.4E
                                          282
                                                 443
                                                        486
```

元の人へへ

```
86122000 24
                  11 5N
                          134 3E
                                     40
                                           284
                                                  399
                                                         326
                                                                 90
                                                                        1.5
                                                                                      35
                                                                                             55
  86122006 25
                  10 9N
                          133 1E
                                     22
                                           263
                                                  377
                                                         274
                                                                 95
                                                                        10
                                                                               15
                                                                                      55
                                                                                             60
  86122012 26
                  10 1N
                          132 7E
                                           199
                                                  344
                                                         370
                                                                 90
                                                                         0
                                                                               20
                                                                                      50
                                                                                             50
  86122018
            27
                   9 8N
                           130 1E
                                      6
                                            98
                                                  184
                                                                 90
                                                                                      35
  86122100 28
                   9 2N
                           128 SE
                                            62
                                                   49
                                                                 90
                                                                               20
                                                                                      25
  86122106 29
                   9 3N
                          126 9E
                                      6
                                            61
                                                  114
                                                                 80
                                                                               30
                                                                                      25
  86122112 30
                   9 7N
                          125.4E
                                     19
                                            24
                                                  123
                                                                 75
                                                                               25
  86122118 31
                  10 ON
                          123 BE
                                     13
                                            40
                                                                         10
                                                                               2 C
 86122200 32
                  10 1N
                          122 OF
                                      6
                                           114
                                                                 50
                                                                         0
 86122206 33
                  10.3N
                          121 15
                                      0
                                           121
                                                                 40
 86122212 34
                  10.7N
                          120 3F
                                      6
                                                                 40
                                                                         0
 86122218 35
                  11 1N
                          119 5E
                                                                 40
                                                                         0
 86122300 36
                  11.6N
                          118.9E
                                     40
                                                                 35
                                                                         0
 86122306 37
                  12 1N
                          118.2E
                                     31
                                                                 35
                                                                         0
 86122312 38
                  12 3N
                          117 4E
                                      6
                AVERAGE
                                     29
                                           130
                                                 233
                                                         288
              # OF CASES
                                     38
                                            33
                                                   30
Typhoon Norris (26W)
                 BT Lat BT Lon Pos Er 24 Er 48 Er 72 Er BT Wn WW ER 24 WE 48 WE 72 WE
    DTG
           W#
 86122118
                          166 9E
                                           202
                                                  307
                                                                 30
                                                                                      10
                                                                                             20
 86122200
                  8.9N
                          166.2E
                                     35
                                           102
                                                  178
                                                          74
                                                                 30
                                                                               10
                                                                                      10
                                                                                             25
 86122206
                  9.2N
                          165.5F
                                     22
                                           78
                                                 115
                                                          55
                                                                 30
                                                                         0
                                                                               10
                                                                                      10
                                                                                             20
 86122212
                  9 7N
                          164 5F
                                     31
                                           107
                                                  181
                                                        231
                                                                 30
                                                                                0
                                                                                      5
                                                                                             10
 86122218
                 10.1N
                         163.5E
                                    24
                                           82
                                                  138
                                                         168
                                                                 30
                                                                         0
                                                                                0
                                                                                      10
                                                                                             15
 86122300
                 10 6N
                          162.5E
                                     18
                                           30
                                                 124
                                                         169
                                                                 30
                                                                                             15
 86122306
                 11.0N
                         161 5E
                                    19
                                           109
                                                 242
                                                        244
                                                                 30
                                                                                      10
                                                                                            25
 86122312
                 11 4N
                         160.2E
                                    47
                                           174
                                                 314
                                                        282
                                                                35
                                                                         0
                                                                                      10
                                                                                            10
 86122318
                 11.5N
                         159.3E
                                     0
                                           86
                                                 189
                                                        188
                                                                40
                                                                        5
                                                                               10
                                                                                      15
                                                                                            15
 86122400
            10
                 11.5N
                         158.3E
                                    12
                                                 128
                                           90
                                                        188
                                                                40
                                                                         0
                                                                              10
                                                                                      10
                                                                                             10
 86122406
            11
                 11.6N
                         156 8E
                                    26
                                          114
                                                 151
                                                        244
                                                                40
                                                                         0
                                                                               0
                                                                                            10
86122412
                 11.5N
                         155.1E
                                    13
                                          107
                                                  91
                                                        217
                                                                40
                                                                         0
                                                                               0
                                                                                      5
                                                                                            10
 86122418
            13
                 11.3N
                         153.9F
                                    19
                                           88
                                                  88
                                                        203
                                                                40
                                                                                      0
                                                                                            10
 86122500
            14
                 10.8N
                         152 BF
                                    19
                                           25
                                                 118
                                                        213
                                                                40
                                                                               - 5
                                                                                     10
                                                                                            15
86122506
           15
                 10.3N
                         151 6F
                                    53
                                           65
                                                 153
                                                        218
                                                                45
                                                                         0
                                                                               0
                                                                                     1.5
                                                                                            20
86122512 16
                 10.1N
                         150.2E
                                    13
                                          145
                                                 158
                                                        183
                                                                45
                                                                        0
                                                                               . 5
                                                                                    1.5
                                                                                            25
86122518 17
                 10.2N
                         149.2E
                                          168
                                                 182
                                                        156
                                                                45
                                                                        0
                                                                               5
                                                                                    10
                                                                                            30
86122600 18
                 10.5N
                         148.4E
                                    12
                                           76
                                                 148
                                                        106
                                                                50
                                                                        n
                                                                               ٥
                                                                                     . 5
                                                                                            20
86122606 19
                 10.9N
                         147.3E
                                           76
                                                 141
                                                        117
                                                                50
                                                                        0
                                                                               5
                                                                                    10
                                                                                            20
86122612 20
                 11.4N
                         146.2E
                                     8
                                           54
                                                  89
                                                        265
                                                                55
                                                                        0
                                                                               0
                                                                                    - 10
                                                                                            10
86122618 21
                 11.7N
                         144.8E
                                     6
                                           1.3
                                                 140
                                                        343
                                                                5.5
                                                                        0
                                                                               0
                                                                                    - 15
                                                                                            - 5
86122700 22
                 11.7N
                         143.5E
                                     6
                                           53
                                                 135
                                                        358
                                                                60
                                                                        0
                                                                                    - 15
86122706 23
                 11.8N
                         142.2E
                                     6
                                           88
                                                 220
                                                        384
                                                                65
                                                                        0
                                                                                    10
                                                                                             5
86122712 24
                 12 2N
                         140.8F
                                     8
                                          123
                                                 300
                                                        470
                                                                        0
                                                                               0
                                                                                      0
                                                                                            10
86122718 25
                 12.5N
                         139 6E
                                     6
                                          135
                                                 339
                                                        447
                                                                65
                                                                        5
                                                                               5
                                                                                      5
                                                                                            20
86122800 26
                 13.1N
                         138.9E
                                     0
                                          159
                                                 401
                                                        470
                                                                70
                                                                        0
                                                                              1.5
                                                                                      n
                                                                                            20
86122806 27
                 13.6N
                         138.3E
                                    19
                                          182
                                                 457
                                                        748
                                                                75
                                                                        0
                                                                              20
                                                                                     10
                                                                                            10
861228:2 28
                 13.9N
                         137.8E
                                          164
                                                 498
                                                        836
                                                                80
                                                                        0
                                                                               5
                                                                                     15
                                                                                            35
86122818 29
                 13.8N
                         137.5E
                                    12
                                         217
                                                 578
                                                       1002
                                                                85
                                                                        ٥
                                                                                     15
86122900 30
                13.7N
                         137 3E
                                     0
                                          161
                                                 397
                                                        679
                                                                90
                                                                        0
                                                                               5
                                                                                     25
                                                                                            40
86122906 31
                 13.2N
                         136.9E
                                    13
                                         207
                                                449
                                                        741
                                                                90
                                                                        0
                                                                              10
                                                                                     30
86122912 32
                12.7N
                         136.4E
                                    19
                                         210
                                                449
                                                                85
                                                                        0
                                                                              15
                                                                                     40
86122918 33
                11.9N
                         135.6E
                                    35
                                         227
                                                469
                                                                80
                                                                              20
                                                                                    35
86123000 34
                11.2N
                         134.5F
                                    0
                                         155
                                                387
                                                                80
                                                                        0
                                                                              10
                                                                                    25
86123006 35
                10.5N
                         133.2F
                                   25
                                         176
                                                431
                                                                        0
                                                                              10
                                                                                    25
86123012 36
                10.0N
                         131.8E
                                    13
                                          79
                                                                70
                                                                        0
                                                                              20
86123018 37
                10.0N
                         130.1E
                                         127
                                                                60
                                                                        0
86123100 38
                10.0N
                         128.3E
                                          102
                                                                55
                                                                        0
86123106 39
                10.0N
                        126.7E
                                          65
                                                                50
                                                                       0
                                                                              10
86123112 40
                10.2N
                        125.1E
                                    0
                                                                40
                                                                       0
86123118 41
                10.4N
                        123 3E
                                    0
                                                               35
                                                                       0
               AVERAGE
                                   17
                                         118
                                                254
                                                       334
            # OF CASES
                                   41
                                          39
                                                 35
                                                        31
```

APPENDIX I

DEFINITIONS

BEST TRACK - A subjectively smoothed path, versus a precise and very erratic fix-to-fix path, used to represent tropical cyclone movement.

CENTER - The vertical axis or cone of a tropical cyclone. Usually determined by wind, temperature, and/or pressure distribution.

<u>CYCLONE</u> - A closed atmospheric circulation rotating about an area of low pressure (counter-clockwise in the northern hemisphere).

EPHEMERIS - Position of a body (satellite) in space as a function of time; used for gridding satellite imagery. Since ephemeris gridding is based solely on the predicted position of the satellite, it is susceptible to errors from vehicle pitch, orbital eccentricity, and the oblateness of the earth.

EXPLOSIVE DEEPENING - A decrease in the minimum sea-level pressure of a tropical cyclone of 2.5 mb/hr for 12 hours or 5.0 mb/hr for six hours (ATR 1971).

EXTRATROPICAL - A term used in warnings and tropical summaries to indicate that a cyclone has lost its "tropical" characteristics. The term implies both poleward displacement from the tropics and the conversion of the cyclone's primary energy sources from release of latent heat of condensation to baroclinic processes. The term carries no implications as to strength or size.

EYE - A term used to describe the central area of a tropical cyclone when it is more than half the surrounded by wall cloud.

FUITHHARA EFFECT - An interaction in which tropical cyclones within about 700 nm (1296 km) of each other begin to rotate about one another. When intense tropical cyclones are within about 400 nm (741 km) of each other, they may also begin to move closer to each other.

MAXIMUM SUSTAINED WIND - Highest surface wind speed averaged over a one-minute period of time. Peak gusts over water average 20 to 25 percent higher than sustained winds.

RAPID DEEPENING - A decrease in the minimum sea-level pressure of a tropical cyclone of 1.25 mb/hr for 24-hours (ATR 1971).

RECURVATURE - The turning of a tropical cyclone from an initial path toward the west or northwest to a path toward the northeast.

SIGNIFICANT TROPICAL CYCLONE - A tropical cyclone becomes "significant" with the issuance of the first numbered warming by the responsible warming agency.

SUPER TYPHOON/HURRICANE - A typhoon/hurricane in which the maximum sustained surface wind (one-minute mean) is 130 kt (67 m/s) or greater.

TROPICAL CYCLONE - A non-frontal low-pressure system of usually synoptic scale developing over tropical or subtropical waters and having a definite organized circulation.

TROPICAL CYCLONE AIRCRAFT RECONNAISSANCE COORDINATOR - A USCINCPACAF representative designated to levy tropical cyclone aircraft weather reconnaissance units within a designated area of the PACOM and to function as coordinator between USCINCPACAF and the appropriate typhoon/hurricane warming center.

TROPICAL DEPRESSION - A tropical cyclone in which the maximum sustained surface wind (one-minute mean) is 33 kt (17 m/s) or less.

TROPICAL DISTURBANCE - A discrete system of apparently organized convection - generally 100 to 300 nm (185 to 556 km) in diameter - originating in the tropics or subtropics, having a non-frontal migratory character, and having maintained its identity for 12- to 24-hours. It may or may not be associated with a detectable perturbation of the wind field. As such, it is the basic generic designation which, in successive stages of intensification, may be classified as a tropical depression, tropical storm or typhoon (hurricane).

TROPICAL STORM - A tropical cyclone with maximum sustained surface winds (one-minute mean) in the range of 34 to 63 kt (17 to 32 m/s) inclusive.

TROPICAL UPPER-TROPISPHERIC TROUGH (TUIT) - A dominant climatological system (upper-level trough) and a daily synoptic feature, of the summer season over the tropical North Atlantic, North Pacific and South Pacific Oceans.

WALL CLOUD - An organized band of cumuliform clouds immediately surrounding the central area of a tropical cyclone. The wall cloud may entirely enclose or partially surround the center.

APPENDIX II NAMES FOR TROPICAL CYCLONES

Column 1	Column 2	Column 3	Column 4
ANDY	ABBY	ALEX	AGNES
BRENDA	BEN	BETTY	BILL
CECIL	CARMEN	CARY	CLARA
DOT	DOM	DINAH	DOYLE
ELLIS	ELLEN	ED	ELSIE
FAYE	FORREST	FREDA	FABIAN
GORDON	GEORGIA	GERALD	GAY
HOPE	HERBERT	HOLLY	HAL
IRVING	IDĀ	IAN	IRMA
JUDY	JOE	JUNE	JEFF
KEN	KIM	KELLY	KIT
LOLA	LEX	LYNN	LEE
MAC	MARGE	MAURY	MAMIE
NANCY	NORRIS	NINA	NELSON
OWEN	ORCHID	OGDEN	ODESSA
PEGGY	PERCY	PHYLLIS	PAT
ROGER	RUTH	ROY	RUBY
SARAH	SPERRY	SUSAN	SKIP
TIP	THELMA	THAD	TESS
VERA	VERNON	VANESSA	VAL
WAYNE	WYNNE	WARREN	WINONA

NOTE:

Names are assigned in rotation, alphabetically. When the last name (WINONA) has been used, the sequence will begin again with "ANDY".

Source: CINCPACINST 3140.1 (series)

APPENDIX III

REFERENCES

- Allen, R. L., 1984: COSMOS: CYCLOPS Objective Steering Model Output Statistics. Postprints, 15th Conference on Hurricanes and Tropical Meteorology. Miami, Fl, Jan 9-13, 1984, pp. 14-20.
- Atkinson, G. D., and C. R. Holliday, 1977: Tropical Cyclone Minimum Sea-Level Pressure and Maximum Sustained Wind Relationship for the Western North Pacific. Monthly Weather Review, Vol. 105 No. 4, pp. 421-427 (also FLEWEACEN TECH NOTE: JTWC 75-1).
- Brand, S., 1970: Interaction of Binary Tropical Cyclones of the Western North Pacific Ocean. Journal of Applied Meteorology, Vol. 9, pp. 433-441.
- Chen, L., and W. M. Gray, 1985: Global View of the Upper-Level Outflow Patterns Associated with Tropical Cyclone Intensity Change During FGGE. Atmospheric Science Paper 392, NASA NAG 5-299, Department of Atmospheric Science, Colorado State University, Fort Collins, Colorado, 106 pp.
- Dieroks, J. M., R. C. Wier and M. K. Kopper, 1982: Forecast Verification and Reconnaissance Data for Southern Hemisphere Tropical Cyclones (July 1980 through June 1982). NAVOCEANCOMCEN/JTWC TECH NOTE 82-1. 77 pp.
- Dong, K., and C. J. Neumann, 1983: On the Relative Motion of Binary Tropical Cyclones. <u>Monthly</u> Weather Review, Vol. 111, pp. 945-953.
- Dunnavan, G. M., 1981: Forecasting Intense Tropical Cyclones Using 700 mb Equivalent Potential Temperature and Central Sea-Level Pressure. NAVOCEANCOMCEN/JTWC TECH NOTE 81-1, 12 pp.
- Dvorak, V. F., 1984: Tropical Cyclone Intensity Analysis Using Satellite Data. NOAA Technical Report NESDIS 11, U.S. Department of Commerce, National Oceanic and Atmospheric Administration, National Earth Satellite Service, Washington, D.C., 20233, 46 pp.
- Gray, W. M., 1979: Tropical Cyclone Origin, Movement and Intensity Characteristics Based on Data Compositing Techniques. NAVENVPREDRSCHFAC Contractor Report CR 79-06, 124 pp.
- Harrison, E. J., Jr., 1981: Initial Results from the Navy Two-way Interactive Nested Tropical Cyclone Model. Monthly Weather Review, Vol. 109, pp. 173-177.
- Hebert, P. H., and Poteat, K. O., 1975: A Satellite Classification Technique for Subtropical Cyclones. NOAA Technical Memorandum NWS SR-83, 25 pp.
- Hodur, R. M., and S. D. Burk, 1978: The Fleet
 Numerical Weather Central Tropical Cyclone
 Model: Comparison of Cyclonic and One-Way
 Interactive Boundary Conditions.
 Weather Review, Vol. 106, pp. 1665-1671.

- Holliday, C. R. and A. H. Thompson, 1979: Climatological Characteristics of Rapidly Intensifying Typhoons. Monthly Weather Review, Vol. 107, pp. 1022-1034.
- Jarrell, J. D. and Somerville, 1970: A Computer Technique for using Typhoon Analogs as a Forecast Aid. Technical Paper No. 6-70. U.S. Weather Research Facility, Norfolk, VA, 39 pp.
- Pacific Stars and Stripes. 23-17, Ropporgi 7-chome, Minato-Ku, Tokyo, 106 Japan (APO San Francisco 90'905), 18 July 1986, page 15.
- Renard, R. J., 1968: Forecasting the Motion of Tropical Cyclones using a Numerically Derived Steering Current and its Bias. Monthly Weather Review, Vol. 96, No. 7, pp. 453-469.
- Renard, R. J., S. G. Calgon, M. J. Daley, and S. K. Rinard, 1973: Forecasting the Motion of North Atlantic Tropical Cyclones by the MOHATT, Monthly Weather Review, Vol. 101, No. 3, pp. 206-214.
- Sadler, J. C., 1979: Tropical Cyclone Initiation by the Upper-Tropospheric Trough. NAVENVPREDRSCHFACO Technical Paper No. 2-76, 103 pp.
- Weir, R. C., 1982: Predicting the Acceleration of Northward-moving Tropical Cyclones using Upper-Tropospheric Winds. NAVOCEANCOMCEN/JTWC TECHNOTE 82-2, 40 pp.
- Wirfel, W. P., and S. A. Sandgathe, 1986: Forecast Verification and Reconnaissance Data for Southern Hemisphere Tropical Cyclones (July 1982 through June 1984). NAVOCEANCOMCEN/JTWC TECH NOTE 86-1, 102 pp.

APPENDIX IV PAST ANNUAL TROPICAL CYCLONE REPORTS

Copies of the past Annual Tropical Cyclone/Typhoon Reports can be obtained through:

National Technical Information Service 5285 Port Royal Road Springfield, Virginia 22161

Refer to the following acquisition numbers when ordering:

YEAR	ACQUISITION NUMBER
1959	AD 786147
1960	AD 786148
1961	AD 786149
1962	AD 786128
1963	AD 786208
1964	AD 786209
1965	AD 786210
1966	AD 785891
1967	AD 785344
1968	AD 785251
1969	AD 785178
1970	AD 785252
1971	AD 768333
1972	AD 768334
1973	AD 777093
1974	AD 010271
1975	AD A023601
1976	AD A038484
1977	AD A055512
1978	AD A070904
1979	AD A082071
1980	AD A094668
1981	AD All 2002
1982	AD A124860
1983	AD A137836
1984	AD A153395
1985	AD 1168284

DISTRIBUTION

APGNC (2)	NAVAL ACADEMY (2)
AMS TECHNICAL LIBRARY (2)	NAVAL CIVIL ENG LAB, PORT HUENEME, CA (1)
BUR OF MET, BRISBANE (3)	NAVEASTOCEANCEN, NORFOLK (1)
BUR OF MET, DARWIN (2)	NAVHISTCEN (1)
BUR OF MET, MELBOURNE (2)	NAVOCEANCOMCEN, ROTA (1)
BUR OF MET, PERTH (1)	NAVOCEANCOMFAC, JACKSONVILLE (1)
BUR OF PLANNING, GUAM (2)	NAVOCEANCOMFAC, YOKOSUKA (2)
CATHOLIC UNIVERSITY OF AMERICA (1)	NAVPOLAROCEANCEN, SUITLAND (2)
CENTRAL MET. OBSERVATORY, BEIJING, PRC (2)	NAVWESTOCEANCEN, PEARL HARBOR (2)
CENTRAL METEOROLOGICAL OFFICE, SEOUL (1)	NEPRF (3)
CENWEABUR, TAIWAN (3)	NOAA, NHC (2)
CINCPACFLT (3)	NOAA/GUAM (2)
CIUDAD UNIV, MEXICO (1)	NOAA/AOML, HRD, MIAMI FL (1)
CIVIL DEFENSE, GUAM (5)	NOAA/HYDROMETEOROLOGY BR, SILVER SPRINGS, MD (1)
CIVIL DEFENSE, SAIPAN (1)	NOAA/ACQUISITION SECTION ROCKVILLE, MD (1)
CNO (OP-952), WASHINGTON DC (1)	NOAA/NESDIS, REDWOOD CITY, CA (1)
COLORADO STATE UNIV (3)	NOAA/PMEL, SEATTLE, WA (1)
COLORADO STATE UNIV (LIBRARY) (1)	NOCD, AGANA (3)
COMFAIRECONRON ONE (1)	NOCD, ALAMEDA (1)
COMMONWEALTH OF NORTHERN M.I., SAIPAN (5)	NOCD, ASHEVILLE (2)
COMNAVAIRSYSCOM (1)	NOCD, ATSUGI (1)
COMMAVEACENGCOMPACDIV (1)	NOCD, BARBERS POINT (1)
COMNAVMARIANAS (2)	NOCD, DIEGO GARCIA (20
COMNA VOCEANCOM (2)	NOCD, KADIENIA (1)
COMNAVSURFGRU WESTPAC (2)	NOCD, MISAWA (2)
COMNAVSURFPAC (3)	NOCD, MONTEREY (1)
COMPHIBGRU ONE (1)	NPGS DEPT OF MET (3)
COMSC (1)	NPGS LIBRARY (1)
COMSEVENTHELT (1) COMSUBGRU SEVEN (1)	
1. 1. 1 1 1	
COMUSNAVPHIL (1)	OKINAWA MET OBS (1)
CONGRESSIONAL INFORMATION SERVICE, MD (1)	OLG/HQ AMS/CARCAH, NAT HURRICANE CENTER (5)
DEFENSE COMMUNICATIONS AGENCY, GUAM (1)	PACAP/DOW (2)
DEFENSE DOCUMENTATION CENTER (12)	PACIFIC STARS AND STRIPES (1)
DEPT OF AIR FORCE (1)	PAGASA, RP (5)
DEPT OF COMMERCE (2)	PENNSYLVANIA STATE UNIVERSITY (1)
DET 2, 20 WS (1)	ROYAL OBSERVATORY, HONG KONG (5)
DET 4, 20 MS (1)	SECDEF, PENTAGON (2)
DET 5, 20 MS (2)	TAIWAN UNIVERSITY (1)
DET 8, 20 MS (2)	TEXAS A and M UNIVERSITY (1)
DET 10, 30 MS (1)	TYPHOON COM SECR, MANILA (2)
DET 15, 30 WS (1)	UNESCAP, BANGKOK (2)
DET 17, 20 WS (1)	UNIVERSITY OF CHICAGO (1)
DET 18, 30 WS (1)	UNIVERSITY OF HAWAII DEPT OF MET (3)
ENVIR SVCS DIV, PENTAGON (1)	UNIVERSITY OF HAWAII (LIBRARY) (1)
PAA, GUAM (5)	UNIVERSITY OF PHILIPPINES (5)
FLENIMOCEANCEN, MONTEREY (2)	UNIVERSITY OF WASHINGTON (1)
FLORIDA STATE UNIV., TALLAHASSEE (2)	USCINCPAC (1)
GEOLOGICAL SURVEY, GUAM (1)	USS BELLEAU WOOD (1)
GFDL, PRINCETON, N.J. (1)	USS CARL VINSON (1)
GUAM PUBLIC LIBRARY (5)	USS CONSTELLATION (1)
HUGHES AIRCRAFT COMPANY (1)	USS CORAL SEA (1)
HQ AMS/DOR (2)	USS ENTERPRISE (1)
HQ AMS/DNT (1)	USS KITTY HAWK (1)
HQ USAP/XCORZ (1)	USS LONG BEACH (2)
INDIA MET DEPT (3)	USS MIDWAY (1)
INST OF PHYSICS, TAIWAN (2)	UŞS NEW ORLEANS (1)
INDI OF PHISTON, PHINES (2)	500 test 0102220 (2)
INSTITUO DE GEOFISICA, MEXICO (1)	USS OKINAWA (1)
INSTITUO DE GEOFISICA, MEXICO (1)	USS OKINAWA (1)
INSTITUD DE GEOFISICA, MEXICO (1) JAPAN MET AGENCY (3)	USS OKINAMA (1) USS RANGER (1) USS TARAWA (1)
INSTITUD DE GEOFISICA, MEXICO (1) JAPAN MET AGENCY (3) JASDF, TOKYO (2)	USS OKINANA (1) USS RANGER (1)
INSTITUD DE GEOFISICA, MEXICO (1) JAPAN MET AGENCY (3) JASDP, TOKYO (2) KOTSCH, W.J., RADM (RET) (2) LOS ANGELES PUBLIC LIBRARY (1)	USS OKINANA (1) USS RANGER (1) USS TARAWA (1) USS TRIPOLI (2) WEATHER SERV MET OBS, AGANA (2)
INSTITUD DE GEOFISICA, MEXICO (1) JAPAN MET AGENCY (3) JASDF, TOKYO (2) KOTSCH, W.J., RADM (RET) (2)	USS OKINAWA (1) USS RANGER (1) USS TARAWA (1) USS TRIPOLI (2) WEATHER SERV MET OBS, AGANA (2) WEATHER MODIFICATION PROGRAM OFFICE (1)
INSTITUD DE GEOFISICA, MEXICO (1) JAPAN MET AGENCY (3) JASDP, TOKYO (2) KOTSCH, W.J., RADM (RET) (2) LOS ANGELES PUBLIC LIBRARY (1) MACHO, IL (1) MARATHON OIL COMPANY, TX (2)	USS OKINAWA (1) USS RANGER (1) USS TARAWA (1) USS TRIPOLI (2) WEATHER SERV MET OBS, AGANA (2) WEATHER MODIFICATION PROGRAM OFFICE (1) WORLD DATA CENTER A, NOAA (2)
INSTITUD DE GEOFISICA, MEXICO (1) JAPAN MET AGENCY (3) JASDP, TOKYO (2) KOTSCH, W.J., RADM (RET) (2) LOS ANGELES PUBLIC LIBRARY (1) MACHO, IL (1) MARATHON OIL COMPANY, TX (2) MARINERS MEATHER LOG (2)	USS OKINAWA (1) USS RANGER (1) USS TARAWA (1) USS TRIPOLI (2) WEATHER SERV MET OBS, AGANA (2) WEATHER MODIFICATION PROGRAM OFFICE (1) WORLD DATA CENTER A, NOAA (2) WORLD WEATHER BLDG, MD (1)
INSTITUD DE GEOFISICA, MEXICO (1) JAPAN MET AGENCY (3) JASDP, TOKYO (2) KOTSCH, W.J., RADM (RET) (2) LOS ANGELES PUBLIC LIBRARY (1) MAC/HO, IL (1) MARATHON OIL COMPANY, TX (2) MARINERS MEATHER LOG (2) MASS INST OF TECH (1)	USS OKINAWA (1) USS RANGER (1) USS TARAWA (1) USS TRIPOLI (2) WEATHER SERV MET OBS, AGANA (2) WEATHER MODIFICATION PROGRAM OFFICE (1) WORLD DATA CENTER A, NOAA (2) WORLD WEATHER BLDG, MD (1) 1WW/DON (3)
INSTITUD DE GEOFISICA, MEXICO (1) JAPAN MET AGENCY (3) JASDP, TOKYO (2) KOTSCH, W.J., RADM (RET) (2) LOS ANGELES PUBLIC LIBRARY (1) MACHO, IL (1) MARATHON OIL COMPANY, TX (2) MARINERS MEATHER LOG (2)	USS OKINAWA (1) USS RANGER (1) USS TARAWA (1) USS TRIPOLI (2) WEATHER SERV MET OBS, AGANA (2) WEATHER MODIFICATION PROGRAM OFFICE (1) WORLD DATA CENTER A, NOAA (2) WORLD WEATHER BLDG, MD (1) 1WW/DON (3) 3AD/DO (1)
INSTITUD DE GEOFISICA, MEXICO (1) JAPAN MET AGENCY (3) JASDP, TOKYO (2) KOTSCH, W.J., RADM (RET) (2) LOS ANGELES PUBLIC LIBRARY (1) MAC/HO, IL (1) HARATHON OIL COMPANY, TX (2) MARINERS NEATHER LOG (2) MASS INST OF TECH (1) MCAS FUTENMA (2) MCAS IWAKUNI (3)	USS OKINAWA (1) USS RANGER (1) USS TARAWA (1) USS TRIPOLI (2) WEATHER SERV MET OBS, AGANA (2) WEATHER MODIFICATION PROGRAM OFFICE (1) WORLD DATA CENTER A, NOAA (2) WORLD WEATHER BLDG, MD (1) 1WW/DON (3) 3AD/DO (1) 3WW/CC (1)
INSTITUD DE GEOFISICA, MEXICO (1) JAPAN MET ACENCY (3) JASDF, TOKYO (2) KOTSCH, W.J., RADM (RET) (2) LOS ANGELES PUBLIC LIBRARY (1) MAC/HO, IL (1) HARATHON OIL COMPANY, TX (2) MARINERS MEXITHER LOG (2) MASS INST OF TECH (1) HCAS FUTENMA (2) MCAS IMARUNI (3) MCAS KANEDHE BAY (1)	USS OKINAWA (1) USS RANGER (1) USS TARAWA (1) USS TARAWA (1) USS TRIPOLI (2) WEATHER SERV MET OBS, AGANA (2) WEATHER MODIFICATION PROGRAM OFFICE (1) WORLD DATA CENTER A, NOAA (2) WORLD WEATHER BLDG, MD (1) 1WW DON (3) 3AD/ DO (1) 3WW/CC (1) 5WW/CC (1)
INSTITUD DE GEOFISICA, MEXICO (1) JAPAN MET AGENCY (3) JASDP, TOKYO (2) KOTSCH, W.J., RADM (RET) (2) LOS ANGELES PUBLIC LIBRARY (1) MACHO, IL (1) MARATHON OIL COMPANY, TX (2) MARINERS NEATHER LOG (2) MASS INST OF TECH (1) MCAS FUTENMA (2) MCAS IWAKUNI (3) MCAS KANEDHE BAY (1) MET DEPT BANGROK (4)	USS OKINAWA (1) USS RANGER (1) USS TARAWA (1) USS TARAWA (1) USS TRIPOLI (2) WEATHER SERV MET OBS, AGANA (2) WEATHER HODIFICATION PROGRAM OFFICE (1) WORLD DATA CENTER A, NOAA (2) WORLD WEATHER BLDG, MD (1) 1WW DON (3) 3AD/DO (1) 3WW/CC (1) 5WW/CC (1) 17 WS/DO (1)
INSTITUD DE GEOFISICA, MEXICO (1) JAPAN MET AGENCY (3) JASDP, TOKYO (2) KOTSCH, W.J., RADM (RET) (2) LOS ANGELES PUBLIC LIBRARY (1) MPC/HO, IL (1) MARATHON OIL COMPANY, TX (2) MARINERS MEATHER LOG (2) MASS INST OF TECH (1) MCAS FUTENPA (2) MCAS FUTENPA (2) MCAS INAKUNI (3) MCAS KANEONE BAY (1) MET DEPT BANGROK (4) MET SOC OF SOUTH WALES, AUST (2)	USS OKINAWA (1) USS RANGER (1) USS TARAWA (1) USS TEARAWA (1) USS TRIPOLI (2) WEATHER SERV MET OBS, AGANA (2) WEATHER MODIFICATION PROGRAM OFFICE (1) WORLD DATA CENTER A, NOAA (2) WORLD WEATHER BLDG, MD (1) 1WW/DON (3) 3AD/DO (1) 3WW/OC (1) 5WW/OC (1) 17 MS/DO (1) 30WS/OC (2)
INSTITUD DE GEOFISICA, MEXICO (1) JAPAN MET AGENCY (3) JASDP, TOKYO (2) KOTSCH, W.J., RADM (RET) (2) LOS ANGELES PUBLIC LIBRARY (1) MAC/HO, IL (1) MARATHON OIL COMPANY, TX (2) MARINERS NEATHER LOG (2) MASS INST OF TECH (1) MCAS FUTENPA (2) MCAS IWAKUNI (3) MCAS KANEDHE BAY (1) MET DEPT BANGROK (4) MET SOC OF SOUTH WALES, AUST (2) MET RESEARCH INST LIBRARY, TOKYO (1)	USS OKINAWA (1) USS RANGER (1) USS TARAWA (1) USS TRIPOLI (2) WEATHER SERV MET OBS, AGANA (2) WEATHER MODIFICATION PROGRAM OFFICE (1) WORLD DATA CENTER A, NOAA (2) WORLD WEATHER BLDG, MD (1) 1WW/DDN (3) 3AD/DD (1) 3WW/CC (1) 5WW/CC (1) 17 WS/DD (1) 30WS/CC (2) 34 AWF, 920 WRG (1)
INSTITUD DE GEOFISICA, MEXICO (1) JAPAN MET AGENCY (3) JASDP, TOKYO (2) KOTSCH, W.J., RADM (RET) (2) LOS ANGELES PUBLIC LIBRARY (1) MAC/HO, IL (1) MARATHON OIL COMPANY, TX (2) MARINERS MEATHER LOG (2) MASS INST OF TECH (1) MCAS FUTENMA (2) MCAS IWAKUNI (3) MCAS KANEDHE BAY (1) MET DEPT BANGROK (4) MET SOC OF SOUTH WALES, AUST (2) MET RESEARCH INST LIBRARY, TOKYO (1) MICRONESIAN RESEARCH CENTER UOG, GUAM (2)	USS OKINAWA (1) USS RANGER (1) USS TARAWA (1) USS TRIPOLI (2) WEATHER SERV MET OBS, AGANA (2) WEATHER MODIFICATION PROGRAM OFFICE (1) WORLD DATA CENTER A, NOAA (2) WORLD WEATHER BLDG, MD (1) 1WW/DON (3) 3AD/DO (1) 3WW/CC (1) 5WW/CC (1) 17 WS/DO (1) 30WS/CC (2) 34 AMF, 920 WRG (1) 41 RWFW/OL-D (2)
INSTITUD DE GEOFISICA, MEXICO (1) JAPAN MET AGENCY (3) JASDF, TOKYO (2) KOTSCH, W.J., RADM (RET) (2) LOS ANGELES PUBLIC LIBRARY (1) MAC/HO, IL (1) MARATHON OIL COMPANY, TX (2) MARINERS MEXITHER LOG (2) MASS INST OF TECH (1) MCAS FUTENHA (2) MCAS IMARUNI (3) MCAS KANEOHE BAY (1) MET DEPT BANGROK (4) MET SOC OF SOUTH WALES, AUST (2) MET RESEARCH INST LIBRARY, TOKYO (1) MICRONESIAN RESEARCH CENTER UOG, GUAM (2) NAT CLIH DATA CENTER, NC (2)	USS OKINAWA (1) USS RANGER (1) USS TARAWA (1) USS TARAWA (1) USS TRIPOLI (2) WEATHER SERV MET OBS, AGANA (2) WEATHER MODIFICATION PROGRAM OFFICE (1) WORLD DATA CENTER A, NOAA (2) WORLD WEATHER BLDG, MD (1) 1WW/DON (3) 3AD/DO (1) 3WW/CC (1) 5WW/CC (1) 17 MS/DO (1) 30MS/CC (2) 34 AMF, 920 WRG (1) 41 RWW/DL-D (2) 43 SW/DO (1)
INSTITUD DE GEOFISICA, MEXICO (1) JAPAN MET AGENCY (3) JASDP, TOKYO (2) KOTSCH, W.J., RADM (RET) (2) LOS ANGELES PUBLIC LIBRARY (1) MACHO, IL (1) MARATHON OIL COMPANY, TX (2) MARINERS MEATHER LOG (2) MASS INST OF TECH (1) MCAS FUTENMA (2) MCAS IMARUNI (3) MCAS KANEOHE BAY (1) MET DEPT BANGROK (4) MET SOC OF SOUTH WALES, AUST (2) MET RESEARCH INST LIBRARY, TOKYO (1) MICRONESIAN RESEARCH CENTER UOG, GUAM (2) NATIONAL METEOROLOGICAL LIBRARY, BRACKNELL, UK (2)	USS OKINAWA (1) USS RANGER (1) USS TARAWA (1) USS TARAWA (1) USS TRIPOLI (2) WEATHER SERV MET OBS, AGANA (2) WEATHER MODIFICATION PROGRAM OFFICE (1) WORLD DATA CENTER A, NOAA (2) WORLD WEATHER BLDG, MD (1) 1WW DON (3) 3AD/ DO (1) 3WW/CC (1) 5WW/CC (1) 17 WS/DO (1) 30WS/CC (2) 34 AWF, 920 WRG (1) 41 RWRW/OL-D (2) 43 SW/DO (1) 54 WRS/CC (4)
INSTITUD DE GEOFISICA, MEXICO (1) JAPAN MET AGENCY (3) JASDF, TOKYO (2) KOTSCH, W.J., RADM (RET) (2) LOS ANGELES PUBLIC LIBRARY (1) MAC/HO, IL (1) MARATHON OIL COMPANY, TX (2) MARINERS MEXITHER LOG (2) MASS INST OF TECH (1) MCAS FUTENHA (2) MCAS IMARUNI (3) MCAS KANEOHE BAY (1) MET DEPT BANGROK (4) MET SOC OF SOUTH WALES, AUST (2) MET RESEARCH INST LIBRARY, TOKYO (1) MICRONESIAN RESEARCH CENTER UOG, GUAM (2) NAT CLIH DATA CENTER, NC (2)	USS OKINAWA (1) USS RANGER (1) USS TARAWA (1) USS TARAWA (1) USS TRIPOLI (2) WEATHER SERV MET OBS, AGANA (2) WEATHER MODIFICATION PROGRAM OFFICE (1) WORLD DATA CENTER A, NOAA (2) WORLD WEATHER BLDG, MD (1) 1WW/DON (3) 3AD/DO (1) 3WW/CC (1) 5WW/CC (1) 17 MS/DO (1) 30MS/CC (2) 34 AMF, 920 WRG (1) 41 RWW/DL-D (2) 43 SW/DO (1)


REPORT DOCUMENTATION PAGE								
Not NOS INTERNATION		16 RESTRICTIVE MARKINGS						
Tenny - Horse (ASS + CATION AUTHORITY		3 D STRIBUTION-AVAILABILITY OF REPURT						
Zhi e chas hi at an Dawngrading sched	AS IT APPEARS IN THE REPORT/ DISTRIBUTION UNLIMITED							
4 OF HE HOLD HOAN ZATION REPORT NUM	BER.S	5 MONITORING ORGANIZATION REPORT NUMBER SI						
A. NAME OF PERFORMING ORGANIZATION NOTICE OF ANOCHMOEN SUTTWO	NAVOCEANCOMCEN/JTWC							
ec. ACD At 6S (CIV) Nate and 7TF Code	·	76. ADDRESS (City)	State and ZIP Cod	ie ·				
: MMAUMAR BOX 17 E.E.G. SAN FRANCISCO, CA	N 96630	COMNAVMAI		SCO, CA	96630			
84 NAME OF FUNDING SPONSORING CREANIZATION TOWOODDANCOMCEN/JTWC	8b. OFFICE SYMBOL -/If applicable:	9. PROCUREMENT I	NSTRUMENT 'D	ENTIFICATION N	NUMBER			
8. ADDRESS (c.t.) Nate and ZIP Code	<u>}</u>	10 SOURCE OF FUR	NDING NOS					
STANIAUMAR BOX 17		PROGRAM	PROJECT	TASK	WORK UNIT			
D.P.O. SAN FRANCISCO, CA	96630	ELEMENTNO	NO	. NO	. 70			
11 TILE Include Security Classification 1936 ANNUAL TROPICAL CYC	CLONE REPORT		: ! !		; ;			
12 PERSONAL AUTHOR(S)		.	<u> </u>	<u> </u>				
13a TYPE OF REPORT 13b. TIME C		14 DATE OF REPOR	RT (Yr. Mo., Day	1 .				
ANNUAL FROM JANSE TO DECSE 1986 191 PLUS 1-1								
17 COSATI CODES	18 SUBJECT TERMS (C	antinue on recerse if n	cessary and ident	ifs he block numb	or:			
FIELD GROUP SUB GR	TROPICAL CYCI			ICAL STOR				
`4 02	TROPICAL DEPI				R TYPHOONS			
19 ABSTRACT Continue on reverse if necessary and	TROPICAL CYCI		CH METEO	ROLOGICAL	SATELLITE			
ANNUAL PUBLICATION SUMMARIZING THE TROPICAL CYCLONE SEASON IN THE WESTERN MOPTH PACIFIC, BAY OF BENGAL AND THE ARABIAN SEA, AND SOUTH PACIFIC AND SOUTH PACIFIC AND SOUTH INDIAN OCEANS. A BEST TRACK IS PROVIDED FOR EACH SIGNIFICANT TROPICAL CYCLONE. A BRIEF NARRATIVE IS GIVEN FOR ALL TYPHOONS AND SELECTED TROPICAL CYCLONES IN THE WESTERN NORTH PACIFIC AND NORTH INDIAN OCEAN. ALL RECONNAISSANCE DATA USED TO CONSTRUCT THE BEST TRACKS ARE PROVIDED. FORFCAST VERIFICATION DATA AND STATISTICS FOR THE JOINT TYPHOON WARNING CENTER (JTWC) ARL SUMMARIZED.								
20 DISTRIBUTION AVAILABILITY OF ABSTRAC	T	21 ABSTRACT SECU	JRITY GLASSIF	CAT V				
UNGLASSIF ED ONL MITED 🏅 SAME AS ART	UNCLASSIF	TIED						
22a NAME OF RESPONSIBLE INDIVIDUAL	22b TELEPHONEN Include Visited							
FPANICH. WELLS	671-344-		•					

NO-R184 882 ANNUAL TROPICAL CYCLONE REPORT 1986(U) NAVAL OCEANOGRAPHY COMMAND CENTER/JOINT TYPHOON MARNING CENTER FPO SAN FRANCISCO 96630 C G STEINBRUCK ET AL UNCLASSIFIED 1986

3/3

NL





MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

BLOCK 18 (CONTINUED)
TROPICAL CYCLONE BEST TRACK DATA
TROPICAL CYCLONE FORECASTING
AIRCRAFT RECONNAISSANCE
DYNAMIC TROPICAL CYCLONE MODELS
TYPHOON ANALOG MODEL
TROPICAL CYCLONE STEERING MODEL
CLIMATOLOGY/PERSISTENCE TECHNIQUES
TROPICAL CYCLONE FIX DATA

UNCLASSIFIED

END

10-87

DTIC